

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Satbayev University

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Satbayev University

SERIES
OF GEOLOGY AND TECHNICAL SCIENCES

4 (442)

JULY – AUGUST 2020

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Б а с р е д а к т о р ы
э. ғ. д., профессор, ҚР ҰҒА академигі

И.К. Бейсембетов

Бас редакторының орынбасары
Жолтаев Г.Ж. проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., академик (Қазақстан)
Абсадықов Б.Н. проф., корр.-мүшесі (Қазақстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Әзірбайжан)
Бакиров А.Б. проф., (Қырғызстан)
Буктуков Н.С. проф., академик (Қазақстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Жарменов А.А. проф., академик (Қазақстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., академик (Қазақстан)
Мұхамеджанов М.А. проф., корр.-мүшесі (Қазақстан)
Оздоев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (АҚШ)
Штейнер М. проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № **KZ39VPU00025420** мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2020

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыр көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Г л а в н ы й р е д а к т о р
д. э. н., профессор, академик НАН РК

И. К. Бейсембетов

Заместитель главного редактора
Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Р е д а к ц и о н н а я к о л л е г и я:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., академик (Казахстан)
Абсадыков Б.Н. проф., чл.-корр. (Казахстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Буктуков Н.С. проф., академик (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Жарменов А.А. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., академик (Казахстан)
Мухамеджанов М.А. проф., чл.-корр. (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (США)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2020

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

E d i t o r i n c h i e f

doctor of Economics, professor, academician of NAS RK

I. K. Beisembetov

D e p u t y e d i t o r i n c h i e f

Zholtayev G.Zh. prof., dr. geol-min. sc.

E d i t o r i a l b o a r d:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., academician (Kazakhstan)
Absadykov B.N. prof., corr. member. (Kazakhstan)
Agabekov V.Ye. academician (Belarus)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Buktukov N.S. prof., academician (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadjikistan)
Gravis R.M. prof. (USA)
Zharmenov A.A. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., academician (Kazakhstan)
Muhamedzhanov M.A. prof., corr. member. (Kazakhstan)
Ozdoyev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Stepanets V.G. prof., (Germany)
Humphery G.D. prof. (USA)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2020

Editorial address: Institute of Geological Sciences named after K.I. Satpayev

69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 4, Number 442 (2020), 62 – 69

<https://doi.org/10.32014/2020.2518-170X.85>

UDC 622.775

IRSTI 52.13.17

Ye. S. Oryngozhin¹, N. A. Yeremin², G. P. Metaxa³, Zh. N. Alisheva³

¹Almaty University of Energy and Communications, Almaty, Kazakhstan;

²Gubkin University National University of Oil and Gas, Moscow, Russia;

³D. A. Kunayev Mining Institute, Almaty, Kazakhstan.

E-mail: e24.01@mail.ru, ermn@me.com, gmetaksa@mail.ru, zhannat_86.2007@mail.ru

UNDERGROUND URANIUM BOREHOLE LEACHING

Abstract. Kazakhstan has the world's largest raw material base of proven industrial uranium reserves. The bowels of the Republic of Kazakhstan contain about 25% of the world's proven uranium reserves. A unique feature of uranium reserves is that 75% of them are concentrated in deposits associated with regional zones of formation oxidation, which can be mined using a relatively cheap and environmentally preferred method of underground leaching. The presence in Kazakhstan of significant reserves of well-explored uranium deposits, developed mining and processing capacities of uranium, as well as the current situation on the world uranium market determine the prospects for the development of Kazakhstan's uranium mining industry.

Existing production technologies for the exploitation of hydrogenous uranium deposits do not meet the requirements of market economy: low labor productivity, high unit costs, require large capital investments, the technology is not competitive, and sulfuric acid is expensive. To create exemplary uranium mines, it is necessary and urgent to develop an innovative technology for the exploitation of hydrogenic uranium deposits. The main operational indicators determining the effectiveness of the application of SST include: leaching rate; average concentration of uranium in productive solutions; reagent consumption; productivity of productive solutions; the degree of extraction of uranium from the bowels; the volume of the solution spent on the extraction of uranium from a unit of ore mass (ratio W: T).

The article presents the results of solving the main technical and technological problems, allowing to develop an innovative technology for the exploitation of hydrogenic uranium deposits: we have developed a method for using pumping wells without changing their design as injection wells; it is not intended to use an inline injection well location system, which makes it possible to drastically reduce capital expenditure; It is planned to use an ordinary pumping well without changing its design using the “x” method; this well can operate both a pumping well and a pumping well. The pumping well will operate under the name “Piston Well” in the mode of pulsating flows when a chemical solution is supplied to an array of uranium hydrogen deposits; the development of a method for intensifying the leaching of useful components, including uranium; a way to drastically reduce the consumption of a chemical reagent (H₂SO₄). With the existing technology for producing a productive uranium solution, the specific consumption of sulfuric acid per 1 ton of uranium concentrate is 1: 100, i.e. per 1 ton of extraction of uranium concentrate requires a consumption of sulfuric acid of 100 tons

The work performed provides economic efficiency for the listed parameters of leaching of uranium.

Key words: geological features, theoretical justification, technology, mining, borehole underground leaching, uranium.

Introduction. The basis for the development and implementation in practice of uranium mining of the method of underground borehole leaching were achievements in the field of geological exploration and industrial assessment, epigenetic deposits of regional zones of reservoir and soil oxidation, advances in the field of hydrodynamics, geochemistry, hydrometallurgy.

Over the past years, collectives of Kazakhstani uranium mining enterprises have done a lot of work to improve uranium mining technology, increase labor productivity, reduce production costs,

and automate production processes. Considerable work has been done in the field of drilling and equipment of wells, improving the means of raising productive solutions, devices for their sorption-desorption redistribution [1,2].

The development and implementation of the method of underground borehole leaching of uranium is one of the most important scientific and technical achievements of the mining industry. The main advantages of the underground leaching method compared to traditional mining methods of field development are as follows [3-5]:

- the possibility of involving in the exploitation of poor and off-balance ores of deposits with complex geological and hydrogeological conditions, but with large reserves of uranium;
- significant reduction in capital investments and terms of commissioning;
- improving working conditions, reducing the number of miners and increasing labor productivity by 2.5-3.5 times;
- reduction of the negative impact of uranium mining on the environment.

Based on the modern achievements of geotechnological science and practice, the development of uranium mining by the method of downhole leaching goes along the path of introducing computer-aided mining technologies based on the full automation of all production processes; optimization of opening, preparation and mining schemes; the introduction and development of new technical means for the construction and development of wells, new structural materials; reduction of solvent costs, ion exchange resins; the introduction of electro-dialysis plants, sorption-desorption concentration apparatuses such as SDK, polymer washing liquids, hydraulic fracturing and hydraulic washing of formations, new methods of electro-ultrasonic intensification of leaching and redistribution of productive solutions; the introduction of effective methods for monitoring the hydro-geochemical parameters of underground leaching sites and environmental rehabilitation of spent deposits [6-9].

The social significance of introducing the method of downhole leaching into uranium mining practice is extremely great. Radically, for the better, the nature of the work of miners and the radiation safety of the work have changed. A further increase in uranium production, based on the introduction of the latest scientific and technical achievements in the practice of developing infiltration deposits, will allow Kazakhstan to take a leading place among the world's uranium producers.

Methods. To solve this problem, theoretical substantiation methods were used for the technology of underground borehole leaching of uranium. About 25% of the world reliably explored uranium reserves are concentrated in the bowels of Kazakhstan. Total reserves and resources are estimated at 1,560 thousand tons of uranium, including category reserves (B + C₁ + C₂) of 928 thousand tons. A unique feature of the republic's uranium reserves is that about 75% of them are concentrated in deposits associated with regional zones of formation oxidation. This type of field is not widespread in the world and is being developed by the most progressive, relatively cheap and environmentally preferable method of underground borehole leaching.

The result of these works is the development of technology for underground borehole leaching of uranium in Kazakhstan. Kazakhstani uranium deposits associated with regional zones of formation oxidation are formed in the Shu-Sarysuyskaya and Syr-Darya depressions of the platform cover of the northern part of the Tien Shan uranium megawatch (Northern, Eastern and Western group of deposits). Deposits associated with zones of soil-layer oxidation are developed in the Ili River basin, outside the zone of activity of industrial enterprises and in the Akmola region of Northern Kazakhstan. Uranium deposits suitable for mining with sulfuric acid leaching through a system of wells drilled from the surface belong to the subgroup of infiltration (hydrogen). These deposits are the basis of the raw material base of the uranium industry of Kazakhstan and are concentrated in the Shu-Sarysuyskaya (Mynkuduk, Inkai, Budenovskoye, Zhalspak, Sholak-Espe, Uvanas, Moinkum, Kanzhugan) and Syrdarya (Irkol, Karamurun, Kharasan, Zarechnoye, Asarchik Kyl, Zha, Chayan, Lunar) uranium ore provinces. The largest of the deposits of the soil-formation oxidation zone and promising for development is the Semizbay deposit [10-14]. The distribution of reserves and resources by geological and industrial types of uranium deposits in Kazakhstan is shown in table.

Reserves and resources for geological and industrial types of uranium deposits in Kazakhstan

Type of deposit	Category reserves B+Ci+C ₂		Reserves and resources B+Ci+C ₂ +Pi	
	thous. tons	%	thous. tons	%
Deposits associated with regional zones of reservoir oxidation	603	65	1160	75,3
Deposits associated with soil formation oxidation zones	82	8,8	97	6,0
Deposits of organogenic phosphate type	29	3,2	29	1,8
Vein stockwork deposits in folded complexes	214	23	274	16,9
Total	928	100	1560	100

The leaching rate is a value equal to the quotient of dividing the length of the ore layer worked out by the solution by the time during which a certain metal fraction is extracted from this layer. Leaching rate V_l is related to the filtering rate V_f by a linear relationship $V_l = \beta \cdot V_f$, where β – constant coefficient for specific ore-solvent combinations. The most important geotechnological parameter, the ratio, is based on this regularity L:S, that is, the ratio of liquid to solid (the ratio of the volume of the solution to the volume of the ore mass).

The reagent consumption for underground leaching of uranium depends on the reagent capacity of ore-bearing rocks, the type and nature of uranium mineralization, rock carbonate, productivity and effective thickness of formations, hydrodynamic conditions for pumping solutions through ore-bearing strata.

In the practice of underground leaching of uranium, the specific consumption of the reagent is 50-150 kg per 1 kg of metal, which is due to the reaction of the acid with other minerals and the spreading of solutions. Carbonates almost completely react with acid (1 kg of sulfuric acid is consumed per 1 kg of CaCO₃), minerals of oxide iron, less intensely ferrous iron and some aluminosilicates (up to 10%) dissolve well (40-50%) [15-17]. At the stage of formation acidification, the reagent (sulfuric acid) consumption is usually 8-10 g / l for ores with high carbonate content and 20-30 g / l for non-carbonate ores. At the leaching stage, the concentration of sulfuric acid in working solutions ranges from 8 to 15 g / l.

The data in table, the data can be used in the evaluation of deposits for the use of underground borehole leaching. The developed classification system for signs of the suitability of infiltration uranium deposits for leaching is recommended for use in the design of PSV technology in Kazakhstan deposits.

The conditions for the formation of exogenous infiltration deposits are associated with the behavior of uranium in the upper parts of the earth's crust, in the zone of so-called hypergenesis, where the migration of chemical elements occurs at low temperatures and pressures. The formation of exogenous uranium deposits is associated with the epigenetic accumulation of uranium minerals during their migration and deposition.

Under the surface conditions of the hypergenesis zone, under the influence of water, air and organic matter, the minerals of the ore-bearing rocks are oxidized and uranium migrates (transfers) by infiltration flows. Natural waters of the hypergenesis zone are true and colloidal solutions of various concentrations. The intensity of migration of chemical elements depends on the acidity and alkalinity of natural waters.


In natural waters in the form of ions and undissociated molecules contains almost all chemical elements, most of which are in a state of strong scattering (about $n \times 10^{-5}$ g / l or less) and only Cl⁻, SO₄²⁻, HCO₃⁻, CO₃²⁻, Na⁺, K⁺, Mg²⁺, Ca²⁺, SiO₂ are contained in significant quantities. A strong influence on the physicochemical characteristics of natural waters is exerted by H⁺ and OH⁻ ions [18]. The oxidizing environment of groundwater is characterized by the content of free oxygen, the redox potential is $E_h > 0.1$ V, often above 0.4 V and can reach 0.6-0.7 V. Uranium is in U⁶⁺ shape, iron is predominantly in the shape Fe³⁺ and only in strongly acidic environments can Fe²⁺ exist. Sulfur is exclusively in form SO₄²⁻. Under certain conditions, there are VO₄³⁻, SeO₃²⁻ and SeO₄²⁻, MoO₄²⁻, MoS₂, ReS₂.

Recovery environment without H₂S - water does not contain free oxygen, E_h обычно ниже 0,4в, иногда ниже нуля. Under these conditions, iron and manganese are in the form Fe²⁺ and Mn²⁺, migrate easily. If H₂S is present in water, If H is present in water, then $E_h < 0$, iron, manganese, copper, zinc and other chalcophilic elements precipitate. Uranium precipitates to form U⁴⁺ compounds. The presence of

dissolved oxygen in natural waters increases the solubility of primary uranium minerals in an acidic sulfate medium, and less intensively in alkaline carbonate. The tetravalent uranium oxides and mixed oxides are completely dissolved in the carbonate medium only in the presence of oxidizing agents. Uranium silicates, phosphates and humates dissolve in an alkaline medium. In natural waters, depending on the total mineralization, chemical composition, pH of the medium and the concentration of uranium in water, ions may be present: UO_2^{2+} , $\text{UO}_2(\text{OH})^+$, $[\text{UO}_2(\text{CO}_3)_2(\text{H}_2\text{O})_2]^{2-}$, $[\text{UO}_2(\text{CO}_3)_3]^{4-}$, as well as undissociated molecules of $\text{UO}_2(\text{OH})_2$. Chemical reactions in the zone of hypergenesis occur at a pressure close to 1 atm. and temperature not exceeding the first ten degrees.

The conditions of existence of uranium compounds in the hypergenesis zone are graphically represented by the diagram in the parameters Eh, pH, pressure CO_2 , since these parameters are the most important characteristics of natural waters. The diagrams depict the equilibrium conditions, that is, the relations between the compounds after reaching thermodynamic equilibrium. Figure by R. Garrels [5,19] shows a diagram of the stability field of uranium compounds as a function of Eh, pH and general ΣCO_2 the amount of carbonate in produced water (P=1 Atmosphere pressure, T=25°C).

Figure shows that hexavalent uranium is almost completely complexed with the formation of uranyl dicarbonate and uranyl tricarbonate ion complexes.

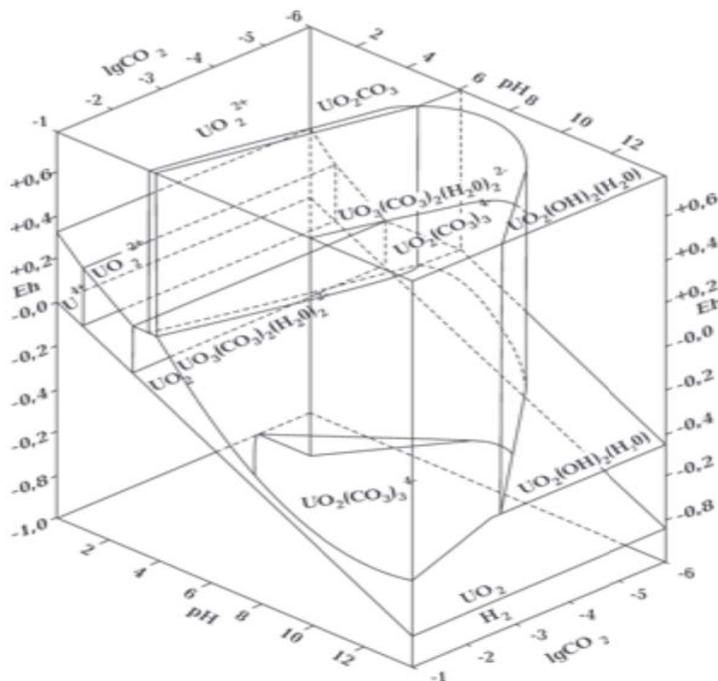

Stability of some uranium compounds in formation water at 25 °C and 1 atm total pressure as a function of pH, Eh and amounts of dissolved carbonate components

With noticeable ΣCO_2 the stability field of uranyl oxide hydrate is displaced. Such complexation proceeds so efficiently that, at a relatively high ΣCO_2 value, the fields of these complexes displace the stability field UO_2 (uraninite). From this it becomes clear that carbonate-containing waters are strong solvents of uranium. Watering the hypergenesis zone with water containing up to 8-10 mg / oxygen increases the water Eh and promotes the conversion of U^{4+} to U^{6+} . If natural water contains up to 2g / l or more carbon dioxide, then uranium migration is also enhanced.

H_2S hydrogen sulfide present in water, which reduces uranium to the tetravalent state, contributes to its precipitation from solution.

When uranium minerals are dissolved by natural waters in the hypergenesis zone, especially under oxidizing conditions, the state of chemical equilibrium between the solid and liquid phases is practically not achieved due to the mobility of the water and the buffer effect of the host rocks on the pH of the water. The forms of uranium in natural waters are very diverse. According to V.V. Shcherbina [5,20], in the zone of hypergenesis, uranium in aqueous solutions can be transported in the following forms:

- soluble uranyl sulfate UO_2SO_4 ;
- colloidal solution of hydroxide composition $[\text{UO}_2(\text{OH})_2]_n$, negative charge carrier;
- readily soluble complex carbonates composition $\text{Na}_4[\text{UO}_2(\text{CO}_3)_3]$;
- readily soluble complex alkaline humate compounds.

The possibility of migration of uranium in aqueous solutions in the form of compounds arises from the chemical properties of uranium, its ability to react with other elements, form ions of different valencies, form soluble complexes and be sorbed by colloids.

Natural waters have a high dissolving power. The dissolving ability of water is caused by large dipole moments of molecules ($\mu = 1.8$) and a high dielectric constant (80.0) of water [1,5,21].

There is a relationship between solubility, heat and dissolution entropy:

$$nRT \ln a = L + T \Delta S = L + T \sum_L^i S$$

where, n – number of ions forming a molecule of uranium salt; a – saturated solution activity; L - heat of dissolution; T - absolute temperature; ΔS – entropy of dissolution; $\sum_L^i S$ - the sum of dissolution entropy ions equal to the change in the entropy of an ion upon its transition from the crystal lattice to a solution with an activity equal to 1.

Discussion. A prerequisite for the implementation of underground leaching technology should be good permeability of the medium containing uranium mineralization for the solution. With fairly good permeability indicators, even deposits of poor uranium ores prove to be profitable for mining. Each uranium deposit is always individual in its natural features, the technical and economic indicators of the exploitation of deposits by underground leaching depend on these features. Moreover, the feasibility of using underground leaching technology for mining a particular uranium deposit is based on the parameters of two factors: the possible volume of uranium production per unit time and the possible cost of producing a unit of uranium.

The main operational indicators that determine the effectiveness of the use of UBL include:

- leaching rate;
- average concentration of uranium in productive solutions;
- reagent consumption;
- productive solution performance;
- the degree of extraction of uranium from the bowels;
- the volume of solution spent on the extraction of uranium from a unit of ore mass (ratio L:S).

Е. С. Орынгожин¹, Н. А. Еремин², Г. П. Метакса³, Ж. Н. Алишева³,

¹Алматы энергетика және байланыс университеті, Алматы, Қазақстан;

²И. М. Губкин атындағы Ұлттық мұнай және газ университеті, Мәскеу, Ресей;

³Д. А. Қонаев атындағы тау-кен ісі институты, Алматы, Қазақстан

УРАНДЫ ЖЕРАСТЫ ҰНҒЫМАЛАРЫН ШАЙМАЛАУ

Аннотация. Қазақстан әлемдегі ең ірі уран өнеркәсіптік қорының шикізат базасына ие. Қазақстан Республикасының жер қойнауында әлемдік барланған уран қорының шамамен 25 %-ы бар. Уран қорларының бірегей ерекшелігі, олардың 75 %-ы жерасты ұңғылап шаймалаудың салыстырмалы арзан және экологиялық жағынан қолайлы тәсілмен өңделуі мүмкін қабаттық тотығу аймақтарымен байланысты кен орындарында шоғырланған. Қазақстанда қорлар бойынша елеулі, жақсы барланған уран кен орындарының, дамыған өндіруші және өндеуші уран қуаттарының болуы, сондай-ақ әлемдік уран нарығының қазіргі заманғы конъюнктурасы Қазақстанның уран өндіру өнеркәсібін дамыту перспективасын алдын ала айқындайды.

Уранның гидрогенді кен орындарын пайдаланудың қазіргі технологиялары нарықтық экономика талаптарына сай емес: еңбек өнімділігінің төмендігі, өнім бірлігінің өзіндік жоғары құны көп мөлшерде тамшыландыруды талап етеді, технология бәсекеге қабілетсіз, күкірт қышқылының шығыны көп. Үлгілі уран

кеніштерін құру үшін гидрогенді уран кен орындарын пайдаланудың инновациялық технологиясын әзірлеуге қажет және өзекті. Жерасты ұңғылап шаймалауды (ЖҰШ) қолданудың тиімділігін анықтайтын негізгі пайдалану көрсеткіштеріне мыналар жатады: сілтілеу жылдамдығы; өнімді ерітінділердегі уранның орташа концентрациясы; реагенттің шығыны; өнімді ерітінділер бойынша өнімділік; жер қойнауынан уранды алу дәрежесі; тау-кен массасы бірлігінен уранды алуға жұмсалатын ерітіндінің көлемі (С:К қатынасы).

Мақалада уранның гидрогенді кен орындарын пайдаланудың инновациялық технологиясын әзірлеуге мүмкіндік беретін негізгі техникалық-технологиялық міндеттерді шешу нәтижелері келтірілген: біз айдау ұңғымалары ретінде конструктивтік ресімдеуін өзгертпей, сору ұңғымаларын пайдалану тәсілін әзірледік; айдау ұңғымаларын орналастырудың бірқатар жүйесін қолдану көзделмеген, бұл капитал салу шығынын күрт қысқартуға мүмкіндік береді; қарапайым сору ұңғымасын «х» тәсілінің көмегімен конструктивті ресімдеуін өзгертпей қолдану қарастырылған, бұл ұңғыма сору және айдау ұңғымасы ретінде жұмыс істей алады. Сору ұңғымасы уранның гидрогенді шоғырының массивіне химиялық ерітінді беру кезінде пульсациялайтын ағын режимінде «поршенді ұңғыма» атымен жұмыс істейтін болады; пайдалы компоненттерді, оның ішінде уранды шаймалау үдерісін қарқындалту тәсілін әзірлеу; химиялық реагент шығынын күрт қысқарту тәсілі (H₂SO₄) қарастырылды. Уранның өнімді ерітіндісін өндірудің қазіргі технологиясы кезінде 1 т уран концентратына күкірт қышқылының үлес шығыны 1: 100 қатынасын құрайды, яғни уран концентратын өндірудің 1 т күкірт қышқылының шығыны 100 т болады.

Орындалған жұмыс уранды сілтілеудің аталған параметрлері бойынша экономикалық тиімділікті қамтамасыз етеді.

Түйін сөздер: геологиялық ерекшеліктер, теориялық негіздеу, технология, өндіру, ұңғымалық жерасты сілтілеу, уран.

Е. С. Орынгожин¹, Н. А. Еремин², Г. П. Метакса³, Ж. Н. Алишева³

¹Алматинский университет энергетики и связи, Алматы, Казахстан;

²РГУ нефти и газа (НИУ) им. И. М. Губкина, Москва, Россия;

³Институт горного дела им. Д. А. Кунаева, Алматы, Казахстан

ПОДЗЕМНОЕ СКВАЖИННОЕ ВЫЩЕЛАЧИВАНИЕ УРАНА

Аннотация. Казахстан обладает крупнейшей в мире сырьевой базой разведанных промышленных запасов урана. Недр Республики Казахстан содержат около 25% мировых разведанных запасов урана. Уникальной особенностью запасов урана является то, что 75% из них сосредоточены в месторождениях, связанных с региональными зонами пластового окисления, которые могут быть отработаны относительно дешевым и экологически предпочтительным способом подземного скважинного выщелачивания. Наличие в Казахстане значительных по запасам, хорошо разведанных месторождений урана, развитых добывающих и перерабатывающих уран мощностей, а также современная конъюнктура мирового рынка урана определяют перспективу развития уранодобывающей промышленности Казахстана.

Существующие технологии добычи эксплуатации гидрогенных месторождений урана не отвечают требованиям рыночной экономики: низкая производительность труда, высокая себестоимость единицы продукции, требуют в больших размерах капвложения, технология не конкурентоспособная, большие расходы серной кислоты. Для создания образцовых урановых рудников необходима и актуальна разработка инновационной технологии эксплуатации гидрогенных урановых месторождений. К основным эксплуатационным показателям, определяющим эффективность применения СПВ, относятся: скорость выщелачивания; средняя концентрация урана в продуктивных растворах; расход реагента; производительность по продуктивным растворам; степень извлечения урана из недр; объем раствора, расходуемого на извлечение урана с единицы горнорудной массы (отношение Ж:Т).

В статье приведены результаты решения основных технико-технологических задач, позволяющих разработать инновационную технологию эксплуатации гидрогенных месторождений урана: нами был разработан способ использования откачных скважин без изменения их конструктивного оформления в качестве закачных скважин; не предусмотрено применение рядной системы расположения закачных скважин, что дает возможность резко сократить расход капиталовложения; предусмотрено применение обыкновенной откачной скважины без изменения ее конструктивного оформления с помощью «х» способа эта скважина может работать как откачная, так и закачная скважина. Откачная скважина будет работать под именем «Поршневая скважина» в режиме пульсирующих потоков при подаче химического раствора в массив

гидрогенной залежи урана; предусмотрена разработка способа интенсификации процесса выщелачивания полезных компонентов, в том числе урана; способ резкого сокращения расхода химического реагента (H₂SO₄). При существующей технологии добычи продуктивного раствора урана удельный расход серной кислоты на 1 т концентрата урана составляет 1:100, т.е. на 1 т добычи концентрата урана требует расход серной кислоты 100 т.

Выполненная работа обеспечивает экономическую эффективность по перечисленным параметрам выщелачивания урана.

Ключевые слова: геологические особенности, теоретическое обоснование, технология, добыча, скважинное подземное выщелачивание, уран.

Information about authors:

Oryngozhin Ye.S., Chief Researcher, Doctor of Technical Sciences, Almaty University of Energy and Communications; e24.01@mail.ru; <https://orcid.org/0000-0002-9452-6817>

Yeremin N.A., Doctor of Technical Sciences, Professor, Gubkin University National University of Oil and Gas; ermnm@me.com; <https://orcid.org/0000-0002-3876-276X>

Metaksa G. P., Dr. of Sc., D.A. Kunayev Mining Institute, Head of Laboratory "Physical and technical problems of development of deposits"; gmetaksa@mail.ru; <https://orcid.org/0000-0001-5271-429X>

Alisheva Zh.N., Researcher, D.A. Kunayev Mining Institute, zhannat_86.2007@mail.ru; <https://orcid.org/0000-0003-0929-4984>

REFERENCES

[1] Altayev Sh.A., Chernetsov G.E., Oryngozhin E.S. Technology for the development of hydrogenous uranium deposits in Kazakhstan. Almaty, 203. 294 p.

[2] Zholtaev G.Zh., Seitmuratova E.Yu., Zhukov N.M. (2019) Academician Kanysh Satpaev and the mineral resource base of Kazakhstan// News of the National academy of sciences of the Republic of the Kazakhstan. Series of geology and technical sciences. Vol. 2 (434). P. 225-231. <https://doi.org/10.32014/2018.2518-170X.47> (in Eng.).

[3] Yazykov V.G., Zhabasanov V.P., Petrov N.N., Rogov E.I., Rogov A.E. Geology of uranium in the deposits of Kazakhstan. Almaty: Kazatomprom, 2001.

[4] Oryngozhin E.S., Zhanqaliev M., Oryngozh E.E. Kazakhstan uranium deposits suitable for underground leaching technology / Int. scientific-practical conf. "The rational use of mineral and industrial raw materials in the conditions of Industry 4.0", dedicated. The 85th anniversary of Acad. NAS RK, doct. tech. sciences, prof. Rakisheva B.R. Almaty, 2019. P. 303-308.

[5] Tsoi S.V., Oryngozhin E.S., Metaksa G.P., Zhanqaliev M.Zh., Alisheva Zh.N., Oryngozh E.E. Evaluation of existing technology and development of an alternative method of exploitation of hydrogenous uranium deposits // International Conference "Actual Achievements of European Science". Sofia, (Bulgaria), 2018. P. 40-44.

[6] Rakishev B.R. Technological resources for improving the quality and completeness of use of the mineral raw materials // News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technical sciences. Vol. 2, N 422. 2017. P. 116-124 (in Eng.) ISSN 2224-5227 <https://doi.org/10.32014/2018.2518-1483.9>

[7] Karazhanova M.K., Piriverdiyev I.A., Akhmetov D.A. (2019) Prediction of the well performance indicators with the use of fuzzy cluster analysis // News of the National academy of sciences of the Republic of the Kazakhstan. Series of geology and technical sciences. Vol. 3 (435). P. 213-218. <https://doi.org/10.32014/2018.2518-170X.47> (in Eng.).

[8] Lewandowski K.A., Kawatra S.K. (2009) Binders for Heap Leaching Agglomeration, Minerals & Metall. Process. Journal, SME, Littleton, Colorado, USA. Vol. 26, N 1.

[9] McNab B. (2006) Exploring HPGR Technology For Heap Leaching of Fresh Rock Gold Ores, IIR Crushing & Grinding Conference, Townsville, Australia, March 29-30.

[10] Robertson S.W., Vercaul A., van Staden P.J., Craven P. 2005. A Bacterial Heap Leaching Approach for the Treatment of Low Grade Primary Copper Sulphide Ore, 3rd S. African Conf. on Base Metals, SAIMM Symp. Series S39, ISBN 1-919783-74-1. P. 471-484.

[11] Ghorbani Y., Petersen J., Franzidis J-P. Heap leaching technology-Current state, innovations, and future directions: A review. Miner. Process. Extr. Metall. Rev., 2016, 37, 73-119.

[12] Panda S., Akcil A., Pradhan N., Deveci H. Current scenario of chalcopyrite bioleaching: A review on the recent advances to its heap-leach technology. Bioresour. Technol. 2015, 196, 694-706.

- [13] Valencia J.A., Méndez D.A., Cueto J.Y., Cisternas L.A. Saltpeter extraction and modelling of caliche mineral heap leaching // Hydrometallurgy. 2008, 90, 103-114.
- [14] Seitmuratov A., Taimuratova L., Zhussipbek B., Seitkhanova A., Kainbaeva L. (2019) Conditions of extreme stress state // News of the National academy of sciences of the Republic of the Kazakhstan. Series of geology and technical sciences. Vol. 5 (437). P. 202-206. <https://doi.org/10.32014/2018.2518-170X.47> (in Eng.).
- [15] Chanturiya V.A., Bunin I.Zh., Lunin V.D., Sedel'nikova G.V., Krylova G.S. Underground and heap leaching of uranium, Systems. Methods. Technologies E.G. Hitrov et al. Calculation of load-bearing ... 2014. N 4 (24). P. 122-126.
- [16] Lizunkin M.V. Gorny informatsionnoanaliticheskiy byulleten (Mining informativeanalytical bulletin). 2016. N 3. P. 297-305.
- [17] Mashkovtsev G.A., Mituga A.K., Polonyankina S.V., Solodov I.N., Shchetochkin V.N. Razvedka i ohrana nedr (Exploration and Protection of Mineral Resources). 2016. N 9. P. 80-87.
- [18] Kenzhaliev B.K., Surkova T.Yu., Berkinbayeva A.N., Dosymbayeva Z.D., Chukmanova M.T. (2019) To the question of recovery of uranium from raw materials // News of the National academy of sciences of the Republic of the Kazakhstan. Series of geology and technical sciences. Vol. 1 (433). P. 112-119. <https://doi.org/10.32014/2018.2518-170X.47> (in Eng.).
- [19] Sakiro G.K., Istomin A.D., Noskov M.D., Cheglov A.A. Izvestiya vysshih uchebnyh zavedeniy. Fizika (News of higher educational institutions. Physics). 2014. Vol. 57, N 2–2. P. 67-70.
- [20] Solodov I.N., Gladyshev A.V., Ivanov A.G. Razvedka i ohrana nedr (Exploration and Protection of the Subsoil). 2017. N 11. P. 65-70.
- [21] Shokobayev N.M., Zhurinov M.Zh., Zhumabayeva D.S., Ivanov N.S., Abilmagzhanov A.Z. (2018) Development of sorption technology of rare-earth metals recovery from uranium in-situ leaching solutions // News of the National academy of sciences of the Republic of the Kazakhstan. Series of geology and technical sciences. Vol. 6 (432). P. 77-84. <https://doi.org/10.32014/2018.2518-170X.47> (in Eng.).

**Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://www.geolog-technical.kz/index.php/en/>

Редакторы *М. С. Ахметова, Д. С. Аленов, А. Ахметова*
Верстка *Д. А. Абдрахимовой*

Подписано в печать 14.08.2020.
Формат 70x881/8. Бумага офсетная. Печать – ризограф.
11,1 п.л. Тираж 300. Заказ 4.