

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ
НАУК РЕСПУБЛИКИ
КАЗАХСТАН
Satbayev University

N E W S

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF
KAZAKHSTAN
Satbayev University

SERIES
OF GEOLOGY AND TECHNICAL SCIENCES

2 (452)
MARCH – APRIL 2022

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы «ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редактор

ЖҰРЫНОВ Мұрат Жұрынұлы, химия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, Қазақстан Республикасы Ұлттық Ғылым академиясының президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **Н = 4**

АБСАДЫКОВ Бахыт Нарикбайұлы, техника ғылымдарының докторы, профессор, ҚР ҰҒА жауапты хатшысы, А.Б. Бектұров атындағы химия ғылымдары институты (Алматы, Қазақстан) **Н = 5**

Редакциялық алқа:

ӘБСАМЕТОВ Мәліс Құдысұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтайұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, Қ.И. Сатпаев атындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **Н = 2**

СНОУ Дэниел, Ph.D, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **Н = 32**

ЗЕЛЪТМАН Реймар, Ph.D, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **Н = 15**

ШЕН Пин, Ph.D, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастығының мүшесі (Пекин, Қытай) **Н = 25**

ФИШЕР Аксель, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, геология-минералогия ғылымдарының докторы, профессор, РФА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **Н = 19**

АГАБЕКОВ Владимир Енокович, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жаңа материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 20**

СЕЙТМҰРАТОВА Элеонора Юсуповна, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА корреспондент-мүшесі, Қ.И. Сатпаев атындағы Геология ғылымдары институты зертханасының меңгерушісі (Алматы, Қазақстан) **Н = 11**

САҒЫНТАЕВ Жанай, Ph.D, қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **Н = 28**

«ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктеуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № **KZ39VPY00025420** мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Тақырыптық бағыты: *геология, мұнай және газды өңдеудің химиялық технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы.*

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2022

Типографияның мекен-жайы: «Аруна» ЖК, Алматы қ., Мұратбаев көш., 75.

Главный редактор

ЖУРИНОВ Мурат Журинович, доктор химических наук, профессор, академик НАН РК, президент Национальной академии наук Республики Казахстан, генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **Н = 4**

АБСАДЫКОВ Бахыт Нарикбаевич, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **Н = 5**

Редакционная коллегия:

АБСАМЕТОВ Малис Кудысович, (заместитель главного редактора), доктор геологоминералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтаевич, (заместитель главного редактора), доктор геологоминералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=2**

СНОУ Дэниел, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраска, США) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **Н=15**

ШЕН Пин, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **Н = 25**

ФИШЕР Аксель, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **Н = 19**

АГАБЕКОВ Владимир Енокович, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **Н = 20**

СЕЙТМУРАТОВА Элеонора Юсуповна, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лабораторией Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=11**

САГИНТАЕВ Жанай, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **Н = 28**

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2022

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75.

Editorial chief

ZHURINOV Murat Zhurinovich, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC “Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky» (Almaty, Kazakhstan) **H = 4**

ABSADYKOV Bakhyt Narikbaevich, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

Editorial board:

ABSAMETOV Malis Kudysovich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

ZHOLTAEV Geroy Zholtaevich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

SNOW Daniel, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

ZELTMAN Reymer, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

PANFILOV Mikhail Borisovich, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

SHEN Ping, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

FISCHER Axel, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H=6**

KONTOROVICH Aleksey Emilievich, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

AGABEKOV Vladimir Enokovich, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

KATALIN Stephan, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

SEITMURATOVA Eleonora Yusupovna, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

SAGINTAYEV Zhanay, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H = 11**

FRATTINI Paolo, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2022

Address of printing house: ST «Aruna», 75, Muratbayev str, Almaty.

NEWS of the National Academy of Sciences of the Republic of Kazakhstan
SERIES OF GEOLOGY AND TECHNICAL SCIENCES
ISSN 2224-5278

Volume 2, Number 452 (2022), 271-282
<https://doi.org/10.32014/2022.2518-170X.175>

UDC 621. 09.1

**K.T. Sherov^{1*}, M.R. Sikhimbayev², B.N. Absadykov³, T.K. Balgabekov¹,
A.D. Zhakaba¹**

¹S. Seifullin Kazakh Agro Technical University, Nur-Sultan, Kazakhstan;

²Karaganda Economic University of Kazpotrebooyuz, Karaganda, Kazakhstan;

³A.B. Bekturov Institute of Chemical Sciences, Almaty, Kazakhstan.

E-mail: *shkt1965@mail.ru*

**STUDY OF TEMPERATURE DISTRIBUTION DURING ROTARY
TURNING OF WEAR-RESISTANT CAST IRON**

Abstract. This work presents a mathematical modeling process of the rotary turning by a numerical method, which allows to research the dynamics of the temperature distribution in the workpiece and cutting tool during processing. Proposed methodology also allows to define the optimal cutting mode during the rotary turning for processing of the durable wear resistant cast iron ICH300X18G3. For performance of the study, from among the many existing models of fracture during the cutting, the criterion, which was first proposed by prof. V.L. Kolmogorov.

In order to increase the productivity of calculations, a mathematical model was proposed where only three objects were used: a cylinder-shaped workpiece and a cutting tool and tool shaft. The work considered the coefficient of friction between the cutting insert and the workpiece, taken equal to 0.29 and in addition, the dynamic coefficient of 0.39. To define the temperature in the objects, objects were separately selected. As a result, the temperature values were taken for different objects. Despite the fact that the occurring phenomena are non-linear, the results showed that by increasing the cutting conditions, it is possible to increase the distribution of temperature and on the contrary, the process is controlled. The results of the research have shown the management possibility of the thermal processes during the process by enumerating technological parameters.

Key words. Rotary turning, cutting tool, temperature, cutting zone, mathematical modeling, fracture deformation.

**К.Т. Шеров^{1*}, М.Р. Сихимбаев², Б.Н. Абсадыков³, Т.К. Балғабеков¹,
А.Д. Жақабә¹**

¹С. Сейфуллин атындағы Қазақ агротехникалық университеті,
Нұр-Сұлтан, Қазақстан;

²Қазтұтынуодағы Қарағанды экономикалық университеті,
Қарағанды, Қазақстан;

³Ә.Б. Бектұров атындағы химия ғылымдары институты,
Алматы, Қазақстан.

E-mail: *shkt1965@mail.ru*

ТОЗУҒА ТӨЗІМДІ ШОЙЫНДЫ РОТАЦИЯЛЫҚ ЖОНУ КЕЗІНДЕ ТЕМПЕРАТУРАНЫҢ ТАРАЛУЫН ЗЕРТТЕУ

Аннотация. Қазіргі заманғы машина жасаудың өзекті мәселелерінің бірі металдарды кесумен өңдеу үшін озық технологиялар мен прогрессивті құралдардың құрылымдарын жасау болып табылады. ЖШС «Maker» - Қарағанды құю-механикалық зауыты жағдайында жүргізілген зерттеулер, ең қиын өңделетін тозуға төзімді ИЧ300Х18Г3 шойыннан жасалған топырақты сорғы 8ГР бөлшектері екенін көрсетті.

Тозуға төзімді ИЧ300Х18Г3 шойынды ротациялық жону әдісімен өңдеу үшін Р6М5 болаттан және STOODY M7-G балқыма материалымен балқытып қапталған табақша кескіштерімен жабдықталған ротациялық құралдардың конструкциялары жасалды. Тозуға төзімді ИЧ300Х18Г3 шойынды ротациялық жону эксперименттік зерттеуі JET GH-1640ZX токарлық бұранда кескіш білдегінде жүргізілді. Өртүрлі кесу аймақтарында эксперименталды түрде температура нәтижелерін алу белгілі қиындықтарға әкеп соғады, яғни құрал-сайманның және өңделетін материалдың әрекеттесетін аймағының шағын өлшемдері, үрдістің жоғары жылдамдықта өтуі, сондай-ақ түйіспелі аймақтардың ұдайы ауысуы.

Осыған байланысты, Ansys WB бағдарламасын қолдана отырып, осы мәселені ротациялық жону үрдісін сандық моделдеу шеше алады. Зерттеуді орындау үшін кесу кезінде қираудың көптеген үлгілерінің ішінен проф. В.Л. Колмогоров ұсынған критерий қолданылды. Есептеу өнімділігін арттыру мақсатында математикалық модель ұсынылды, онда тек үш объект қолданылған: цилиндр формасындағы дайындама мен кескіш құрал және аспап білігі. Жұмыста кескіш пластина мен дайындаманың арасындағы үйкеліс коэффициентінің мәні 0,29 тең деп қабылданған және бұдан басқа динамикалық коэффициенті 0,39 есепке алынды.

Зерттеу нәтижелері технологиялық параметрлерді таңдау арқылы

өңдеу кезінде жылу үрдістерін басқару мүмкіндігін көрсетті. Ұсынылған өңдеу тәсілі үшін «құрал-дайындама» түйісуіндегі температура өңделетін материалдың рекристаллизация температурасына жақын болу керек. Өңделетін материал үшін балку температурасы $T_{\text{балк}} = 1200^{\circ}\text{C}$, ал рекристаллизация температурасы - $T_{\text{рек}} \approx 480^{\circ}\text{C}$ құрайды.

Түйін сөздер. Ротациялық жону, табақшалы кескіш, температура, кесу аймағы, математикалық модель, қирау деформациясы.

**К.Т. Шеров^{1*}, М.Р. Сихимбаев², Б.Н. Абсадыков³, Т.К. Балғабеков¹,
А.Д. Жакаба¹**

¹Казахский агротехнический университет им. С. Сейфуллина,
Нур-Султан, Казахстан;

²Карагандинский экономический университет Казпотребсоюза,
Караганда, Казахстан;

³Институт химических наук имени А.Б. Бектурова, Алматы, Казахстан.
E-mail: shkt1965@mail.ru

ИССЛЕДОВАНИЕ РАСПРЕДЕЛЕНИЯ ТЕМПЕРАТУРЫ ПРИ РОТАЦИОННОМ ТОЧЕНИИ ИЗНОСОСТОЙКОГО ЧУГУНА

Аннотация. Одним из актуальных вопросов современного машиностроения является создание прогрессивных конструкций инструментов и передовых технологий для обработки металлов резанием. Проведенные исследования в условиях ТОО «Maker» – Карагандинский литейно-механический завод – показали, что самым труднообрабатываемым являются детали грунтового насоса 8ГР, изготовленные из износостойкого чугуна ИЧ300Х18ГЗ.

Для обработки износостойкого чугуна ИЧ300Х18ГЗ были изготовлены конструкции ротационных инструментов, оснащенные чашечными резцами из стали Р6М5 и с наплавкой из наплавочного материала STOODY M7-G. Экспериментальные исследования ротационного точения были выполнены на токарно-винторезном станке JET GH-1640ZX. Получение температурных результатов экспериментально в различных зонах резания вызывает определенные сложности, вызванные малыми размерами зон взаимодействия режущего инструмента и обрабатываемого материала, большой скорости протекания процесса, а также постоянной смены контактных зон. В связи с этим, численное моделирование процесса ротационного точения может решить данную проблему посредством применения программы Ansys WB.

Для выполнения исследования из числа множества существующих моделей разрушения при резании использовался критерий, который впервые предложил проф. В.Л. Колмогоров. Для увеличения производительности вычислений была предложена математическая модель, где были использованы только три объекта: заготовка в форме цилиндра, режущий инструмент и вал инструмента. В работе учитывался коэффициент трения между режущей пластиной и заготовкой, принятой равной 0,29 и, кроме этого, коэффициент динамичности 0,39.

Результаты исследования показали возможность управления тепловыми процессами при обработке. Для этого необходимо обеспечение температуры в контакте «инструмент-заготовка», близкую к температуре рекристаллизации. Для обрабатываемого материала температура плавления составляет $T_{пл} = 1200$ °С, а температура рекристаллизации - $T_{рек} \approx 480$ °С.

Ключевые слова: ротационное точение, чашечный резец, температура, зона резания, математическая модель, деформация разрушения.

Introduction. One of the relevant issues of modern engineering is the creation of progressive tool designs and advanced technologies for metal cutting. The dominant role of mechanical processes in the technological cycle of most critical parts is due mainly to versatility, efficiency and high accuracy. At the same time, traditional mechanical processing methods that are widely used do not always satisfy the increasing demands on productivity and quality.

And also, their usage to obtain products from new materials becomes inefficient and low productive with a high consumption of expensive cutting tools. Studies conducted under the conditions of Maker LLP - Karaganda Foundry and Mechanical Plant showed that the most difficult parts of processing of the 8GR soil pump are made of wear-resistant cast iron ICH300X18G3. To process wear-resistant cast iron ICH300X18G3 by the method of rotary turning, constructions of rotary tools equipped with cup cutters were made from P6M5 steel and with surfacing from surfacing material STOODY M7-G.

Experimental studies of rotational turning of wear-resistant cast iron ICH300KH18G3 were carried out on a JET GH-1640ZX lathe. Figure 1 shows the designs of rotary tools equipped with cup cutters made of P6M5 steel and with surfacing from surfacing material STOODY M7-G.

It is known (Konovalov E.Y. et.al, 1972; Borisenko A.V. 1983), that a large reserve of increasing the productivity of the process, improving the quality of the machined surfaces is incorporated in the methods of rotational cutting, in which cup cutting tools are used as cutting elements, rotating around their axes during the cutting process.

A fundamental feature of rotational cutting lies in a sharp decrease in the

sliding speeds of the working surfaces of the tool relative to the material being processed without reducing the relative speed of the tool and part by replacing the sliding friction in the contact zones with rolling friction (Konovalov E.G. et.al, 1969).



Figure 1 - Designs of rotary tools equipped with cup cutters made of P6M5 steel and with surfacing from surfacing material STOODY M7-G.

However, the poorly studied technology of rotational processing inhibits its widespread usage in production. In this regard, the study of the cutting process and in particular the temperature distribution in the contact zone of the «tool-workpiece» during rotary turning is an urgent task.

Materials and basic methods. In the mechanics of destruction, the destruction of a solid body is understood as a macroscopic violation of the integrity of the body as a result of external loads acting on it (Childs T.H. et.al, 1989). In isothermal conditions, the destruction of materials can be conditionally divided into ductile fracture and brittle fracture (Shih A.J. et.al, 1991). Destruction under adiabatic conditions of deformation occurs due to localized adiabatic shear (Bobrov V.F. et.al, 1966). Viscous fracture, as a rule, is associated with large deformations, very high energy dissipation rates and low fracture rates and is intracrystalline fracture. Low fracture – as a rule is a microcrystalline fracture. It is a gap with low energy, which under loading conditions, causes instability of the process, occurs catastrophically. In this case, the rates of low fracture, as a rule, are high (Kato S. et.al, 1972). Thus, brittleness and toughness are not the structure of a material, but varieties of its state (Shirakashi T. et.al, 1973). Materials during cutting can be forced to break by viscous, brittle, and localized shear depending on temperature T , hydrostatic pressure p (negative during tension), strain rate, and other conditions in the shear zone (Otieno A. 2005). Therefore, significant hydrostatic pressures and temperatures that occur during cutting, require special approaches to the implementation of fracture models (Otieno A. 2005). From a detailed review of W. Grzesik (Otieno A. 2005), V. Astakhova (Lundblad M

et.al, 2005), Yu. N. Vnukov (Childs T.H. et.al, 1990), we can see that when processing metal materials, fracture should be considered as a phenomenon due to which the material is separated in front of the cutting edge to form a new surface (cutting surface) and chip elements are formed, breaking the connection between its volumes. For example, when cutting titanium alloys, fracture by a localized shear in a thin layer, where the material has lost the ability to resist deformation, forms clearly pronounced, very offset from one another, though rather tightly interconnected chip elements (Childs T.H. et.al, 1997).

Results. Figure 2 shows an imitation of the process of rotational turning of wear-resistant cast iron ICH300H18G3. The cutting tool is a cup made of P6M5 steel.



Figure 2 – Imitation of the process of rotational turning of wear-resistant cast iron ICH300H18G3.

This methodology for studying the process is of practical interest to the distribution of temperature in the contact zone of the «cutting tool - workpiece». Obtaining temperature results experimentally in various cutting zones causes certain difficulties caused by the small size of the interaction zone of the cutting tool and the processed material, the high speed of the process, as well as the constant change of contact zones. In this regard, numerical simulation of the rotary turning process can solve this problem by using the Ansys WB program. This problem was solved earlier in other works (Togizbayeva B.B. et.al, 2020), (Sherov K.T. et.al, 2017). In these works, only two elements of the workpiece and the cutting tool were analyzed. The desire to reduce costs in developing new and optimizing existing machining processes and equipment for their implementation by virtual modeling of these processes necessitates the use of both finite- and discrete-element, as well as analytical and experimental models of cutting. However, there are still no models allowing to obtain adequate forecasts simultaneously for all indicators of the cutting process in a wide range of its parameters. This is due, first of all, to the lack of an adequate model of friction in the contact of the workpiece - the cutting wedge and, as a rule, to a rather arbitrary setting of its parameters as a constant ratio between tangential and normal stresses, called the average coefficient of friction. To build the

model, the following steps were performed: a CAD model of the cutting tool and the workpiece and shaft (Geometry) was developed; input of the mechanical characteristics of the materials of the cutting tool and the shaft, the workpiece (additionally for the destructible object - Johnson Cook model) (Engineering Data) the type of contact between the surface of the cutting tool and the workpiece (Frictional) is set; decomposition into FE (Explicit) (Figure 3).

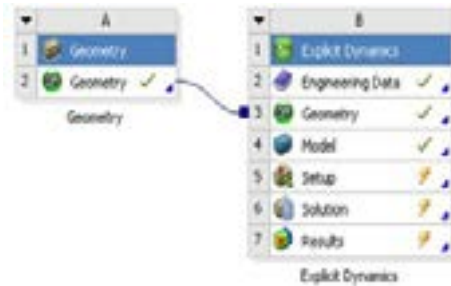


Figure 3 – Block diagram of numerical simulation.

The mechanical characteristics of cast iron, a cutting tool for a cup cutter made of P6M5 steel used in the model are presented in table 1.

Table 1 - Mechanical characteristics of cast iron

Parameters	Unit of measurement	ICH300H18G3
Density, ρ	kg / m ³	7000
The Young's Modulus, E	GPa	162
Poisson's ratio, ν	-	0.25
Specific heat conductivity, c_p	J/(kgK)	525
Initial temperature, T_i	°C	22
Melting temperature T_f	°C	1200

Among the various laws of material behavior under large deformations, the Johnson-Cook law is the most common. It takes into account adiabatic shear phenomena caused by the large plastic deformations and significant temperature gradients. This law establishes the dependence of the stress σ on the degree ε (%) and the strain rate, as well as on the temperature T , and can be decomposed in a multiplicative form into three functions:

$$\sigma = (A + B \cdot \varepsilon^n) \left(1 + C \cdot \frac{\ln \dot{\varepsilon}}{\dot{\varepsilon}_0} \right) \left(1 - \left[\frac{T - T_0}{T_f - T_0} \right] \right) \quad (1)$$

The first factor describes the hardening phenomenon, the second describes dynamic processes, the third describes the vacation phenomena. The riveted multiplier corresponds to the flow stress of a constant strain rate. A is the limit of elasticity of the material under consideration, B and n are linear and nonlinear

hardening parameters. The second factor is a multiplicative factor characterizing the dynamic hardening of the material. It depends on the equivalent rate of plastic deformation. C is the coefficient of sensitivity to the strain rate. We assume the initial strain rate to be 1 c^{-1} . The third factor is a factor corresponding to the phenomenon of thermal tempering. T_0 is the initial temperature. For temperatures between T_0 and the melting temperature T_f , the motion stress decreases along with the temperature and tends to zero at $T = T_f$. At temperatures tending to the melting temperature, the stress of motion is almost zero. Thus, T_0 is the temperature in relation to which the mechanism of thermal tempering is considered, and m is an indicator of the degree of this thermal tempering. The values of the Johnson-Cook model parameters for the workpiece materials are presented in table 2.

Table 2 - the Johnson-Cook model parameters for the workpiece

Workpieces	A, MPa	B, MPa	C	n	m
ICH300H18G3	254	639	0.26573	0.4969	1.037

The adapted failure criterion is interconnected with the Johnson-Cook law of motion. Destruction is considered for each element, starting from the moment when:

$$\omega = \sum \frac{\Delta \bar{\varepsilon}}{\Delta \bar{\varepsilon}_f} \quad (2)$$

where $\Delta \bar{\varepsilon}$ - increment of the resulting plastic deformation,
 $\Delta \bar{\varepsilon}_f$ - the resulting deformation of the material failure [18].

Destruction in the material begins when $\omega = 1$. The Johnson-Cook fracture model takes into account thermomechanical processes at large deformations. The equation of the resulting plastic fracture deformation is presented in the form:

$$\bar{\varepsilon}_f = [D_1 + D_2 \cdot \exp(D_3 \cdot \sigma^*)] \cdot [1 + D_4 \cdot \ln \dot{\varepsilon}^*] \cdot [1 + D_5 \cdot T^*], \quad (3)$$

where σ - the ratio of the average stress (σ_m) and the resulting von Mises stress (ε);

i - dimensionless degree of plastic deformation with ω a calculated strain rate and a limit characterizing the moment of sensitivity to the strain rate. The dimensionless temperature coefficient T^* is written in the form:

$$T^* = (T - T_0) / (T_f - T_0), \quad (4)$$

where T_f - material melting point; T_0 - initial temperature; D_1 - initial fracture deformation; D_2 - exponential factor; D_3 - triaxiality factor; D_4 - speed deformation factor; D_5 - heat factor.

The parameters of equation (3) of plastic deformation of the destruction of the workpiece are presented in table 3.

Table 3. Parameters of plastic deformation destruction of workpieces

Workpieces	D_1	D_2	D_3	D_4	D_5
ICH300H18G3	-0,8	2,1	-0,5	0,002	0,61

In the case when the fracture criterion is made, the criterion for the development of fracture comes into force. This criterion represents the energy level G_f necessary for the development of a crack. After a crack occurs, the behavior of the material appears to be the relationship between stress and displacement, and not between stress and deformation. For a scientific study of the cutting process, it is necessary to obtain the following information: contact force in the contact zone and temperature distribution in the workpieces (Bacaria J.L. 2001; Sherov K.T. et.al, 2018). A denser overlay of the finite element mesh allows you to get more accurate results in modeling physical processes, but it requires a lot of time. Therefore, always choose the ratio between the required accuracy and time constraints. In order to analyze the physical processes in the cutting zone, we show the surface of the workpiece in the cutting zone. Figure 4 shows the finite element mesh of the tool and the workpiece, as well as the boundary conditions.



Figure 4 – Finite element mesh of the tool and the workpiece, boundary conditions

Discussion. According to the result obtained, it is obvious that at the same place on the contact surface the temperature of the surface layers of the workpiece and the cutting tool is different, because the same layers of the workpiece are subject to heating all the time, and since there is rotational processing, the contact surfaces of the tool are constantly updated. And as a result, the surface of the cutting cup does not heat up. Under experimental conditions, the maximum temperature on the surface of the workpiece can reach the values of heat resistance

of the material, and the maximum temperature in the surface layers of the chips can reach the melting temperature of the processed material. Figure 5 shows the temperature distribution in the body of the workpiece.

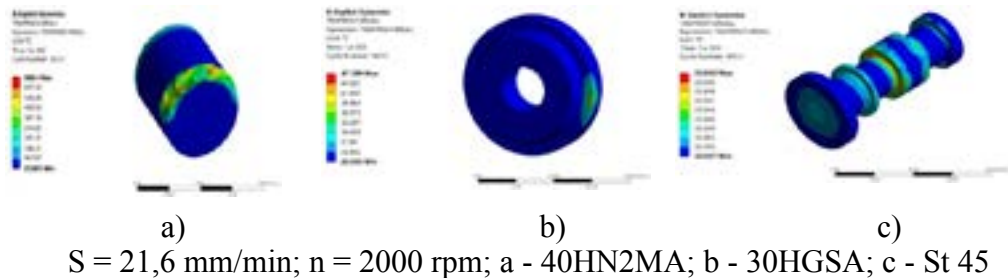


Figure 5 - Contact temperature when processing workpieces made of various materials.

From the figures we can notice that with an increase in the number of revolutions of the workpiece (spindle), an increase in temperature is observed in the “tool-workpiece” contact. For the proposed processing method, it is necessary to ensure the temperature in the contact «tool-workpiece» close to the temperature of recrystallization of the processed material. Look at Figure 5, and when machining workpiece from wear-resistant cast iron ICH300H18G3. For the following material, the melting temperature is $T_m = 1200^{\circ}$, and the recrystallization temperature is $T_{rec} \approx 480^{\circ}$. From the figure we can see that under the contact layer - this is a brightly green zone, the temperature is 460° , and indicates that at the given processing modes the temperature in the tool-to-work contact does not exceed the recrystallization temperature. This confirms the optimality of the specified processing modes. This technique allows you to determine the optimal cutting conditions during rotary turning for processing not only this material, but also for various materials. For performing the study, from among the many existing models of fracture during cutting, we used the criterion, which was first proposed by prof. V.L. Kolmogorov. In order to increase the productivity of calculations, a mathematical model was proposed where three objects were used: a blank in the form of a cylinder, a cutting plate in the form of a cup, and a shaft of variable cross section. In addition to the coefficient of friction between the cutting insert and the workpiece, the dynamic coefficient was included in the work. A picture of the temperature distribution in the objects under study with a change in the spindle speed is obtained. The results of the study showed the possibility of controlling thermal processes during processing by sorting the technological parameters.

Conclusions. 1. The developed computer simulation model of numerical simulation of rotary turning using AnsysWB tools made it possible to study the temperature distribution in the bodies of objects.

2. This technique allows you to set the optimal cutting conditions for processing various materials, bypassing expensive costs.

Information about the authors:

Sherov Karibek Tagayevich – Doctor of Engineering Sciences, Professor, S. Seifullin Kazakh Agro Technical University, Nur-Sultan, Kazakhstan, E-mail: shkt1965@mail.ru, ORCID: <https://orcid.org/0000-0003-0209-180X>;

Sikhimbayev Muratbay Ryzdikbayevich – Doctor of Economic Sciences, Professor, Karaganda economic university of Kazpotrebsoyuz, Karaganda, Kazakhstan, E-mail: smurat@yandex.ru, ORCID: <https://orcid.org/0000-0002-8763-6145>;

Absadykov Bakhyt Narikbayevich – Doctor of Technical Sciences, Professor, the Corresponding member of National Academy of Sciences of the Republic of Kazakhstan, A.B. Bekturov Institute of Chemical Sciences, Almaty, Kazakhstan, E-mail: b_absadykov@mail.ru, ORCID: <https://orcid.org/0000-0001-7829-0958>;

Balgabekov Toleu Kunzholovich – Candidate of technical sciences, S. Seifullin Kazakh Agro Technical University, Nur-Sultan, Kazakhstan, E-mail: tdi_kstu@mail.ru, ORCID: <https://orcid.org/0000-0002-6104-466X>;

Zhakaba Aizhan Daniyalkyzy – Doctoral student, S. Seifullin Kazakh Agro Technical University, Nur-Sultan, Kazakhstan, E-mail: dani9lovna@mail.ru, ORCID: <https://orcid.org/0000-0001-8438-6315>.

REFERENCES

[1] Burtsev V.M., Vasiliev A.S., Deev O.M., etc.; edited by Melnikov G.N. (1998) Engineering technology: In 2T. T. 2. Production of machines: textbook for universities, MG TU Publishing House of N.E. Bauman, Moscow, Russia, p. 640. (In Rus.) ISBN: 978-5-7038-3443-5.

[2] Bobrov V.F. (1966) Determination of stresses in the cutting part of metal-cutting tools. [Obnaruzheniye obnaruzheniya v obnaruzhenii chastey metallovezhushchikh instrumentov]. High-Performance cutting in mechanical engineering, Nauka, Moscow.

[3] Bobrov V.F. (1966) Determination of stresses in the cutting part of metal-cutting tools. [Obnaruzheniye obnaruzheniya v obnaruzhenii chastey metallovezhushchikh instrumentov]. High-Performance cutting in mechanical engineering, Nauka, Moscow.

[4] Borisenko A.V. (1983) Experience in using and ways to improve rotary cutting tools. [Opyt primeneniya i puti sovershenstvovaniya rotatsionnykh rezhushchikh instrumentov]. Minsk, p.189. (In Rus.).

[5] Bacaria J.L. (2001) A behavioral and transient model for metal cutting. These are presented to obtain the title of Doctor. Specialty: mechanical engineering, Toulouse (in Eng.).

[6] Childs T.H.C., Mahdi M.I. (1989) On the stress distribution between the chip and tool during metal turning, *Annals of CIRP*, 38(1): 55–58. DOI: 10.1016/S0890-6955(97)00001-1 (in Eng.).

[7] Childs T.H.C., Maekawa K. (1990) Computer-aided simulation and experimental studies of chip flow and tool wear in the turning of low alloy steels by cemented carbide tools, *Wear*, 139: 235–250. DOI: 10.1016/0043-1648(90)90048-F (in Eng.).

[8] Childs T.H.C., Dirikolu M.H., Sammons M.D. (1997) Experiments on and Finite Element Modeling of turning free-cutting steels at cutting speeds up to 250 m/min, *Proceedings of 1st French and German Conference on high-speed Machining*, p. 325–331. DOI:10.1016/j.ijmecs.2009.10.001 (in Eng.).

[9] Klepikov V.V., Bodrov A.N. (2004) *Technology of mechanical engineering: textbook*. Ministry of education of the Russian Federation, INFRA, Moscow, Russia, p. 859. (In Rus.) ISBN: 5911342510.

[10] Konovalov E.Y., Sidorenko V.A., Sous A.V. under the general editorship of academician Konovalov E.G. (1972) *Progressive methods of rotary cutting of metals [Progressivnyye metody rotatsionnogo rezaniya metallov]*. The Byelorussian SSR. Phys.tech., Science and technology, Minsk, Belarus, p. 269 (In Rus.).

[11] Konovalov E.G. (1969) Cutting with circular rotary incisors. [Rezaniye kruglymi rotatsionnymi reztsami]. Minsk, p. 152. (In Rus.).

[12] Kato S., Yamaguchi K., Yamada M. (1972) Stress distribution at the interface between tool and chip in machining. *Journal of Engineering for Industry: Trans. of ASME*. 94:683–689. DOI: 10.1115/1.3428229 (in Eng.).

[13] Kadyrov A., Zhunusbekova Zh., Ganyukov A., Kadyrova I., Kukeshva A. (2021) General characteristics for loading the working elements of drilling and milling machines when moving in the clay solution, *Communications, Scientific Letters of the University of Zilina*, 23: B97-B105. DOI: <https://doi.org/10.26552/com.C.2021.2.B97-B105> (in Eng.).

[14] Lundblad M., Kalhori V. (2005) Prediction of Contact Behavior at Chip – Insert Interface in Machining. *Proceedings of the 8th CIRP International Workshop on Modeling of Machining Operations*, Chemnitz, p. 485–494. DOI:10.1080/10910340903451506 (in Eng.).

Otieno A. (2005) Flow stress behavior of mild steels and its influence on machinability. *Proceedings of American Society for Engineering Education IL/IN Sectional Conference on Northern Illinois University, DeKalb, Illinois. Session B-T1-2*. http://www.ceet.niu.edu/ASEE_ILIN/PI156.pdf.

[15] Togizbayeva B.B., Sazambayeva B.T., Karazhanov A.A., Kenesbek A.B., Cokoşilă M. (2020) Simulation of operation of neural network with purpose of utilisation of hydraulic actuators in complicated technical conditions, *International Journal of Agricultural and Biological Engineering* *this link is disabled*, 13:11–19. DOI: 10.25165/j.ijabe.20201301.3965 (in Eng.).

[16] Sherov K.T., Sikhimbayev M.R., Sherov A.K., Donenbayev B.S., Rakishev A.K., Mazdubay A.V., Musayev M.M., Abeuova A.M. (2017) Mathematical modeling of thermofrictional milling process using ANSYS WB software, *Journal of Theoretical and Applied Mechanics*, Sofia, 47:24-33. <https://doi.org/10.1515/jtam-2017-0008> (in Eng.).

[17] Shih A.J., Yang H. (1991) Experimental and finite element simulation methods for rate-dependent metal forming processes. *Int. J. for Numerical Method in Engineering*. 31: 345–367. DOI: 10.1590/S0100-7386200000200004 (in Eng.).

[18] Shirakashi T., Usui E. (1973) Friction Characteristics on Tool Face in Metal Machining. *J. Jap. Soc. Precis. Eng.* 39:966-972. DOI: 10.1016/0043-1648(75)90161-1 (in Eng.).

[19] Sherov K.T., Sikhimbayev M.R., Donenbayev B.S., Ainabekova S. (2017) Experimental Research of Rotational-and-Frictional Boring of Big Holes in Large Parts, *Journal of Theoretical and Applied Mechanics*, Sofia, 47:23-36. <https://doi.org/10.1515/jtam-2017-0018> (in Eng.).

[20] Zenkevich O. (1975) *Finite element Method in engineering*, Mir, Moscow, p. 525. (In Rus.) ISBN: 9785458376105.

CONTENTS

A.U. Abdullaev, Sh.S. Yusupov, L.Yu. Shin, A.V. Rasulov, Y.Zh. Yessenzhigitova HYDROGEOSEISMOLOGICAL PRECURSORS SUSAMYR EARTHQUAKE 1992.....	6
N.A. Abdimutalip, A.K. Kurbaniyazov, G. Toychibekova, G. Koishieva, G. Shalabaeva, N. Zholmagambetov INFLUENCE OF CHANGES IN THE LEVEL OF SALINITY OF THE ARAL SEA ON THE DEVELOPMENT OF ECOSYSTEMS.....	17
Zh.K. Aidarbekov, S.A. Istekova CLASSIFICATION OF GEOPHYSICAL FIELDS IN THE STUDY OF GEOLOGICAL AND STRUCTURAL FEATURES OF THE ZHEZKAZGAN ORE DISTRICT.....	33
B. Almatova, B. Khamzina, A. Murzagaliyeva, A. Abdygalieva, A. Kalzhanova NATURAL SORBENTS AND SCIENTIFIC DESCRIPTION OF THEIR USE.....	49
Zh.A. Baimuratova, M.S. Kalmakhanova, SH.S.Shynazbekova, N.S. Kybyraeva, J.L. Diaz de Tuesta, H.T. Gomes MnFe ₂ O ₄ /ZHETISAY COMPOSITE AS A NOVEL MAGNETIC MATERIAL FOR ADSORPTION OF Ni(II).....	58
Ye.Z. Bukayev, G.K. Mutalibova, A.Z. Bukayeva A NEW TECHNOLOGY FOR MANUFACTURING POLYMER-CEMENT COMPOSITION FROM LIMESTONE-SHELL MINING WASTE.....	73
A.Zh. Kassenov, K.K. Abishev, A.S. Yanyushkin, D.A. Iskakova, B.N. Absadykov RESEARCH OF THE STRESS-STRAIN STATE OF HOLES WITH NEW BROACH DESIGNS.....	89
J.Kh. Khamroyev, K. Akmalaiuly, N. Fayzullayev MECHANICAL ACTIVATION OF NAVBAHORSK BENTONITE AND ITS TEXTURAL AND ADSORPTION CHARACTERISTICS.....	104

A.N. Kopobayeva, G.G. Blyalova, A. Bakyt, V.S. Portnov, A. Amangeldikyzy THE NATURE OF RARE EARTH ELEMENTS ACCUMULATION IN CLAY LAYERS AND COALS OF THE SHUBARKOL DEPOSIT.....	117
A. Leudanski, Y. Apimakh, A. Volnenko, D. Zhumadullayev, N. Seitkhanov CALCULATION OF FLOTATOR'S AERATOR FOR SEPARATION OF GROUND PLASTICS.....	131
Zh.T. Mukayev, M.M. Ulykpanova, Zh.O. O zgeldinova, B.E. Kenzheshova, A.B. Khamitova CONTENT OF COPPER IN DESERT SOILS AND PLANTS OF EAST KAZAKHSTAN REGION.....	149
G. Sapinov, A. Imashev, Z. Mukhamedyarova CURRENT STATE OF THE PROBLEM OF MINING INDUCED SEISMICITY AND PROSPECT OF USING SEISMIC MONITORING SYSTEMS.....	161
V.G. Stepanets, V.L. Levin, G.K. Bekenova, M.S. Khakimzhanov, K.S. Togizov ACCESSORY COPPER ORE MINERALS AS A KEY ISSUE IN UNDERSTANDING THE GENESIS OF THE MAYATAS META-CARBONATITE ORES (ULYTAU, CENTRAL KAZAKHSTAN).....	172
S.A. Syedina, L.S. Shamganova, N.O. Berdinova, G.B. Abdikarimova MULTIVARIANT GEOMECHANICAL ESTIMATION OF THE DESIGN PARAMETERS' STABILITY OF SLOPE AND BENCH IN SOUTH SARBAI MINE.....	192
S.A. Tarikhazer, I.I. Mardanov INDICATORS OF ECOGEOMORPHOLOGICAL RISK FOR THE PURPOSE OF SUSTAINABLE DEVELOPMENT OF MOUNTAIN TERRITORIES.....	204
Zh.T. Tleuova, D.D. Snow, M.A. Mukhamedzhanov, E.Zh. Murtazin ASSESSMENT OF THE IMPACT OF HUMAN ACTIVITY ON GROUNDWATER STATUS OF SOUTH KAZAKHSTAN.....	217

Ye.A. Tseshkovskaya, A.T. Oralova, E.I. Golubeva, N.K. Tsoy, A.M. Zakharov	
DUST SUPPRESSION ON THE SURFACES OF STORAGE DEVICE OF TECHNOGENIC MINERAL FORMATIONS.....	230
B.T. Uakhitova, L.I. Ramatullaeva, M.K. Imangazin, M.M. Taizhigitova, R.U. Uakhitov	
ANALYSIS OF INJURIES AND PSYCHOLOGICAL RESEARCHES OF WORKERS IN THE MELTING SHOPS OF THE AKTUBINSK FERRALOYS PLANT.....	242
G.T. Shakulikova, S.M. Akhmetov, A.N. Medzhidova, N.M. Akhmetov, Zh.K. Zaidemova	
IMPROVING THE DESIGN OF INCLINED WELLS AS THE BASIS FOR THE DEVELOPMENT OF HARD-TO-RECOVER HYDROCARBON RESERVES.....	259
K.T. Sherov, M.R. Sikhimbayev, B.N. Absadykov, T.K. Balgabekov, A.D. Zhakaba	
STUDY OF TEMPERATURE DISTRIBUTION DURING ROTARY TURNING OF WEAR-RESISTANT CAST IRON.....	271

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

<http://www.geolog-technical.kz/index.php/en/>

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Редакторы: *М.С. Ахметова, А. Ботанқызы, Д.С. Аленов, Р.Ж. Мрзабаева*

Верстка на компьютере *Г.Д.Жадыранова*

Подписано в печать 19.04.2022.

Формат 70x90^{1/16}. Бумага офсетная. Печать – ризограф.

11,5 п.л. Тираж 300. Заказ 2.