

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ
НАУК РЕСПУБЛИКИ
КАЗАХСТАН
Satbayev University

N E W S

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF
KAZAKHSTAN
Satbayev University

SERIES
OF GEOLOGY AND TECHNICAL SCIENCES

2 (452)
MARCH – APRIL 2022

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы «ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редактор

ЖҰРЫНОВ Мұрат Жұрынұлы, химия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, Қазақстан Республикасы Ұлттық Ғылым академиясының президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **Н = 4**

Ғылыми хатшы

АБСАДЫКОВ Бахыт Нарикбайұлы, техника ғылымдарының докторы, профессор, ҚР ҰҒА жауапты хатшысы, А.Б. Бектұров атындағы химия ғылымдары институты (Алматы, Қазақстан) **Н = 5**

Редакциялық алқа:

ӘБСАМЕТОВ Мәліс Құдысұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтайұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, Қ.И. Сатпаев атындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **Н = 2**

СНОУ Дэниел, Ph.D, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **Н = 15**

ШЕН Пин, Ph.D, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастығының мүшесі (Пекин, Қытай) **Н = 25**

ФИШЕР Аксель, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, геология-минералогия ғылымдарының докторы, профессор, РФА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **Н = 19**

АГАБЕКОВ Владимир Енокович, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жаңа материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 20**

СЕЙТМҰРАТОВА Элеонора Юсуповна, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА корреспондент-мүшесі, Қ.И. Сатпаев атындағы Геология ғылымдары институты зертханасының меңгерушісі (Алматы, Қазақстан) **Н = 11**

САҒЫНТАЕВ Жанай, Ph.D, қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **Н = 28**

«ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктеуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № **KZ39VPY00025420** мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Тақырыптық бағыты: *геология, мұнай және газды өңдеудің химиялық технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы.*

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2022

Типографияның мекен-жайы: «Аруна» ЖК, Алматы қ., Мұратбаев көш., 75.

Главный редактор

ЖУРИНОВ Мурат Журинович, доктор химических наук, профессор, академик НАН РК, президент Национальной академии наук Республики Казахстан, генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **Н = 4**

Ученый секретарь

АБСАДЫКОВ Бахыт Нарикбаевич, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **Н = 5**

Редакционная коллегия:

АБСАМЕТОВ Малис Кудысович, (заместитель главного редактора), доктор геологоминералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтаевич, (заместитель главного редактора), доктор геологоминералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=2**

СНОУ Дэниел, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраски (штат Небраска, США) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **Н=15**

ШЕН Пин, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **Н = 25**

ФИШЕР Аксель, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **Н = 19**

АГАБЕКОВ Владимир Енокович, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **Н = 20**

СЕЙТМУРАТОВА Элеонора Юсуповна, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лабораторией Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=11**

САГИНТАЕВ Жанай, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **Н = 28**

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2022

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75.

Editorial chief

ZHURINOV Murat Zhurinovich, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC “Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky» (Almaty, Kazakhstan) **H = 4**

Scientific secretary

ABSADYKOV Bakhyt Narikbaevich, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

E d i t o r i a l b o a r d:

ABSAMETOV Malis Kudysovich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

ZHOLTAEV Geroy Zholtaevich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

SNOW Daniel, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

ZELTMAN Reymar, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

PANFILOV Mikhail Borisovich, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

SHEN Ping, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

FISCHER Axel, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H=6**

KONTOROVICH Aleksey Emilievich, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

AGABEKOV Vladimir Enokovich, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

KATALIN Stephan, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

SEITMURATOVA Eleonora Yusupovna, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

SAGINTAYEV Zhanay, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H = 11**

FRATTINI Paolo, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2022

Address of printing house: ST «Aruna», 75, Muratbayev str, Almaty.

UDC 621.039.743

J.Kh. Khamroyev¹, K. Akmalaiuly^{2*}, N. Fayzullayev¹

¹Samarkand State University, Samarkand, Uzbekistan;

²Satbayev University, Almaty, Kazakhstan.

E-mail: *kakmalaev@mail.ru*

**MECHANICAL ACTIVATION OF NAVBAHORSK BENTONITE
AND ITS TEXTURAL AND ADSORPTION CHARACTERISTICS**

Abstract. The article presents a method of purification of obtaining betonies clay for use in catalysis. It was found that the cleaning process includes the stages of centrifugation, drying and mechanical activation. Clay cleaning frees it from impurities and increases the proportion of the useful component - the sorption-active mineral montmorillonite. The porosity of the best method was determined (measurement of specific surface area and porosity). The accuracy and standardization of the method for determining the adsorption activity have been carried out. An exponential dependence of the adsorption activity on the weight of the sample, (1.0 g), sorption time (35 min) and the equilibrium concentration of the dye solution (39 ml 0.15%) were established. The physicochemical and textural properties of betonies clay for the use of catalysis have been studied. It was found that bentonite clay for use in catalysis is a light gray powder, odorless, practically insoluble in water and organic solvents, with a particle size of less than 0.3 mm. Control over the process of mechanical activation of bentonite in terms of “adsorption activity” was carried out using methylene blue dye. The results of the analysis of the adsorption activity of clay, obtained depending on the time of its mechanical activation.

Key words: betonies, clay, specific surface area, porosity, adsorption activity.

Ж.Х. Хамроев¹, К. Ақмалайұлы², Н. Н. Файзуллаев¹

¹Самарқанд Медиқал Институты, Самарханд, Өзбекстан;

²Сәтабаев Университеті, Алматы, Қазақстан.

E-mail: *kakmalaev@mail.ru*

НАВБАХОРСК БЕНТОНИТИНІҢ МЕХАНИКАЛЫҚ БЕЛСЕНДІЛІГІ ЖӘНЕ ОНЫҢ МӘТІНДІК-АДОРСПОРТТЫҚ СИПАТТАРЫ

Аннотация. Мақалада катализде қолдану үшін бентонит сазын алудың тазарту әдісі келтірілген. Тазарту процесі центрифугалау, кептіру және механикалық активтендіру кезеңдерін қамтитындығы анықталды. Сазды тазарту оны қоспалардан тазартады және пайдалы компоненттің - сорбциялық-белсенді минерал монтмориллонит үлесін арттырады. ВЕТ әдісінің кеуектілігі анықталды (меншікті беттік ауданы мен кеуектілігін өлшеу). Адсорбциялық белсенділікті анықтау әдісінің дәлдігі мен стандартталуы жүзеге асырылды. Адсорбциялық белсенділіктің үлгінің салмағына, (1,0 г), сорбция уақытына (35 мин) және бояғыш ерітіндісінің тепе-теңдік концентрациясына (39 мл 0,15%) экспоненциалды тәуелділігі анықталды. Бентонит сазының катализді қолдану үшін физикалық-химиялық және текстуралық қасиеттері зерттелді. Катализде қолдануға арналған бентонит балшығының ақшыл сұр ұнтақ, иісі жоқ, іс жүзінде суда және органикалық еріткіштерде ерімейтіні, бөлшектерінің мөлшері 0,3 мм-ден аспайтындығы анықталды.

Бұл жұмыстың мақсаты-бентонит сазының текстуралық және адсорбциялық сипаттамаларын зерттеу. Бентонит балшықтары ауыр металдар иондары, органикалық бояғыштар сияқты әртүрлі заттарға арзан сорбенттер болып табылады. Бірқатар жұмыстар әртүрлі қышқылдармен белсендірілген әр түрлі кен орындарының саздарының физико-химиялық параметрлерін зерттеуге арналған. Мақалада алюмосиликаттардың табиғи қаңқаларына, әсіресе цеолиттерге көп көңіл бөлінеді. Бұл материалдар теріс зарядталған үш өлшемді алюмосиликат қаңқасына ие. Раманың саңылауларында раманың зарядын өтейтін сілтілі металдардың гидратталған оң иондары және су молекулалары бар. Цеолиттерді қыздырғанда олардан су бөлініп, адсорбциялы қуыстар пайда болады. Бентонит саздарын қолдану өрістері әртүрлі активтендіру нәтижесінде оларға жаңа қасиеттер беру арқылы кеңейеді. Монтмориллониттердің кристалдық құрылымына әсер ету сипаты мен күші бойынша қышқылдарды үш топқа бөлуге болады.

Түйін сөздер: бентонит, балшықтар, меншікті бетінің ауданы, кеуектілігі, адсорбциялық белсенділігі.

Ж. Хамроев¹, К. Акмалайұлы², Н. Файзуллаев¹

¹Самаркандский Медикал Институт, Самарханд, Озбекистан;

²Сәтбаев Университет, Алматы, Қазақстан.

E-mail: *kakmalaev@mail.ru*

МЕХАНИЧЕСКАЯ АКТИВАЦИЯ НАВБАХОРСКОГО БЕНТОНИТА И ЕГО ТЕКСТУРНЫЕ И АДСОРБЦИОННЫЕ ХАРАКТЕРИСТИКИ

Аннотация. В статье представлена методика очистки получения бентонитовой глины для применения в катализе. Установлено, что процесс очистки включает стадии центрифугирования, сушки и механической активации. Очистка глины освобождает ее от примесей и повышает долю полезного компонента – сорбционно-активного минерала монтмориллонита. Определена пористость метода ВЕТ (измерение удельной площади поверхности и пористости). Проведена оценка точности и стандартизация метода определения адсорбционной активности. Установлена экспоненциальная зависимость адсорбционной активности от массы навески, (1,0 г), времени сорбции (35 мин) и равновесной концентрации раствора-красителя (39 мл 0,15%). Изучены физико-химические и текстурные свойства бентонитовой глины для применения катализа. Установлено, что бентонитовая глина для применения в катализе представляет собой порошок светло-серого цвета, без запаха, практически не растворимый в воде и в органических растворителях, с размером частиц менее 0,3 мм. Целью работы является исследование текстурных и адсорбционных характеристик бентонитовой глины.

Бентонитовые глины представляют собой хорошие недорогие сорбенты для различных веществ, таких как ионы тяжелых металлов, органические красители. Эти материалы имеют отрицательно заряженный трехмерный алюмосиликатный каркас. В промежутках каркаса находятся гидратированные положительные ионы щелочных металлов, компенсирующие заряд каркаса, и молекулы воды. При нагревании цеолитов из них выделяется вода и образуются адсорбционные полости. Области применения бентонитовых глин расширятся за счет придания им новых свойств в результате различных видов активации. Одним из наиболее эффективных видов воздействия является обработка кислотами.

По характеру и силе воздействия на кристаллическую структуру монтмориллонитов кислоты можно разделить на три группы.

Ключевые слова: бентонит, глина, удельная площадь поверхности, пористость, адсорбционная активность.

Introduction. Increasing the efficiency of use and development of the mineral resource base of betonies clays in Uzbekistan is an urgent problem. Betonies clays are good inexpensive sorbents for various substances, such as heavy metal ions (Dudina S.N. et.al, 2011), organic dyes (Moiseenko, 2006). The study of the physicochemical parameters of clays of various deposits, activated by various acids, is devoted to a sufficient number of works (Akmalaiuly K. et.al, 2020; Serpokrylov E.V. et.al, 2009). Much attention in the literature is paid to natural framework aluminosilicates, especially zeolites. These materials have a negatively charged three-dimensional aluminosilicate framework. In the gaps of the framework, there are hydrated positive ions of alkali metals, which compensate for the charge of the framework, and water molecules. When zeolites are heated, water is released from them, and adsorption cavities are formed. The areas of application of betonies clays will expand by imparting new properties to them as a result of various types of activation (Akmalaiuly K. et.al, 2020; Serpokrylov E.V. et.al, 2009). One of the most effective types of exposure is acid treatment (Gomelya N.D. et.al, 2004). According to the nature and strength of the effect on the crystal structure of montmorillonites, acids can be divided into three groups (Perelomov L.V. et.al, 2013; Orazova S.S. et.al, 2008).

Adsorption and other properties of natural sorbents and their optimal activation conditions are determined on the basis of a complex of physicochemical and adsorption-structural properties. The final stage of laboratory tests is to establish the suitability of sorbents for a specific technological process. The activation and modification of inorganic natural sorbents is carried out with the aim of a directed change in their properties. There are a number of effective methods for chemical and physical modification of the surface and regulation of the porosity of sorbents (Ramazanov A.Sh. et.al, 2015).

Physical methods of sorbent activation are reduced to sample processing in mills, vacuum drying, high pressure and temperature, ultrasonic vibrations, radiation and high frequency current (Sokolova T.A. et.al, 2005).

Materials and methods. On the basis of existing methods of clay purification, a technological method of purification of mineral raw materials of betonies clay, applicable in laboratory conditions, has been developed. The technique includes four stages: centrifugation, drying and mechanical processing. The efficiency of mechanical activation was monitored by observing the main parameters confirming the change in the structure of the clay: the size and shape of particles in electron micrographs, and the indicators of adsorption activity.

Centrifugation was carried out for 5 minutes at a centrifuge operating mode of 3000 rpm. Drying of clay was carried out in a dry heat oven at a temperature of 130 °C for 190 minutes. The result is a clay with a particle size of 1-30 μ m. The specified drying standards are established in a practical way as the most effective. Mechanical processing was carried out in a ball mill, followed by control of the shape, particle size and adsorption activity. It has been experimentally established that the optimal mechanical activation time is 90 minutes. The working hypothesis of mechanical activation for 90 minutes is based on the fact that with an increase in the processing time, an increase in the specific surface occurs, as well as a change in the shape of the solid and the accumulation of defects on its surface.

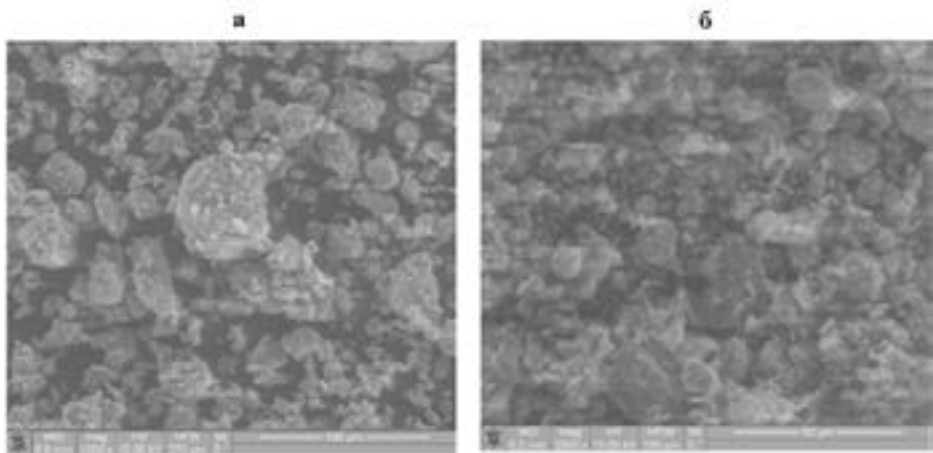


Fig 1. Micrograph of the initial clay sample (a) and after 30 minutes of mechanical activation (b)

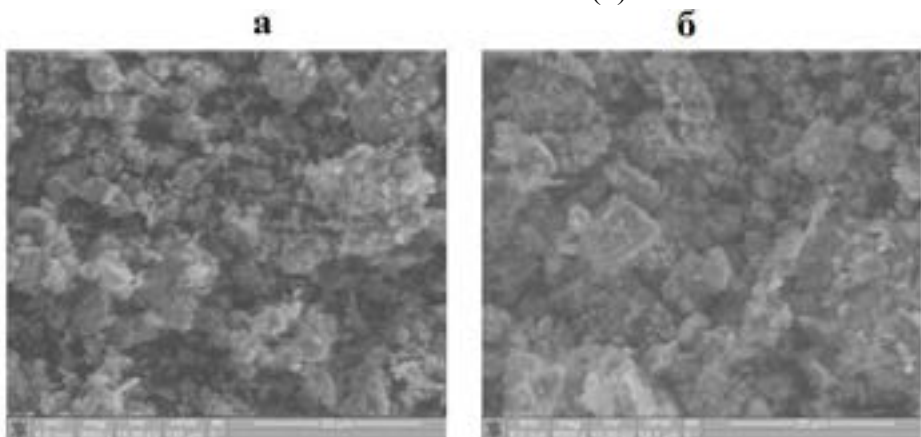


Fig 2. Micrograph of a clay sample after 40 minutes (a) and after 80 minutes (b) mechanical activation

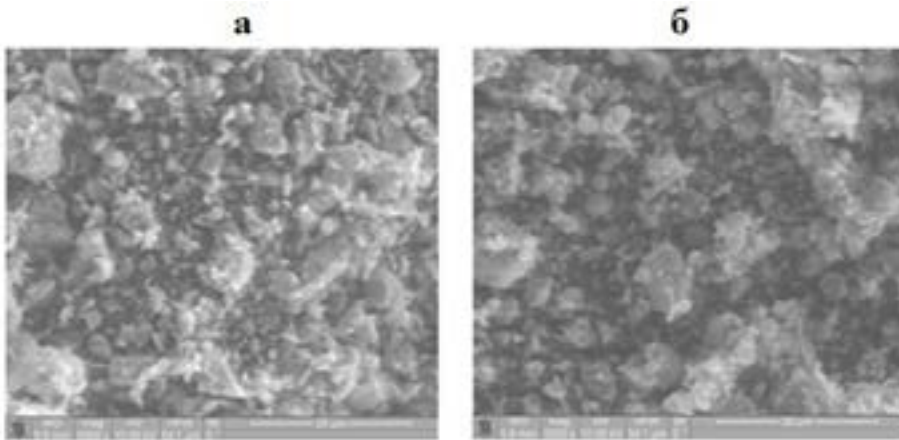


Fig 3. Micrograph of a clay sample after 90 minutes (a) and after 100 minutes (b) mechanical activation.

Results. Figure 1 shows the initial sample with an average size of 10-30 microns; the amount of the specified fraction is 54%, the amount of the fraction with a particle size of 25-35 μm . After 30 minutes of mechanical activation, the number of particles with an average size of 9-13 microns increases to 53%, the number of particles with a size of 15-30 microns decreases to 30%.

After 40 minutes of mechanical activation, a further decrease in clay particles occurs, elements with an uneven surface of 10-30 μm appear, an increase in the amount of this fraction from 34% to 84% is observed (Fig. 2). After 80 minutes of mechanical activation (Fig. 2), particles with a size of 1-4 microns appear, particles with a size of 33-53 microns disappear. The number of particles with a size of 8-10 microns and 13-30 microns is 49% and 34%, respectively. The number of elements with an uneven surface increases. Sticking of small plate elements is observed. After 90 minutes of mechanical activation (Fig. 3), the content of the fine fraction (3-5 μm) increases from 39% to 84%, the amount of the 8-10 μm fraction decreases from 49% to 33%, and fractions larger than 30 μm disappear. In this case, the maximum number of particles with uneven edges and defects on the surface is observed. The aggregation of particles increases. After 100 minutes of mechanical activation, the fractional picture, in comparison with the previous one (after 90 minutes of mechanical activation), changes little. The particles are aggregated and enlarged. Based on the above, the calculation of the particle size distribution was carried out depending on the duration of mechanical activation, presented in Table 1. As follows from the table, the sizes of clay particles decrease from 50 μm (after 30 minutes of mechanical activation) to 3-5 μm (after 100 minutes of mechanical activation) activation). After 40 minutes, the elements stick together. After 90 minutes, the maximum

number of lamellar elements and particles with ragged edges and defects on the surface is recorded. Clay processing for more than 90 minutes is impractical due to increased energy consumption. Thus, the most favorable is the 90-minute mode of mechanical activation.

Table 1. Changes in the particle size of the studied clay sample depending on the duration of its processing

Processing time, minutes	Particle size, μm					
	3-5	5-10	10-20	10-30	30-50	More than 50
	Fraction content, %					
Without processing	-	19	51	34	8.5	1.5
5	-	49	33	15	5	-
15	-	39	80	9	4	-
30	39	49	31	3	-	-
90	83	31	8	-	-	-
80	85	30	5	-	-	-

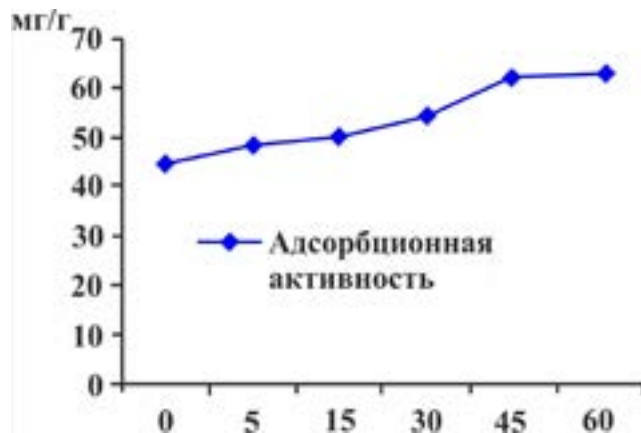


Fig. 4. Dynamics of changes in adsorption activity depending on the time of mechanical activation.

Control over the process of mechanical activation of bentonite in terms of “adsorption activity” was carried out using methylene blue dye. The results of the analysis of the adsorption activity of clay, obtained depending on the time of its mechanical activation, are shown in Figure 4.

As follows from the diagram, the maximum adsorption activity observed in samples that have been machined for 90 and 100 minutes. In our opinion, the most optimal mechanical activation time is 90 minutes. Clay processing for more than 90 minutes is impractical due to increased energy consumption.

Discussion. Sorption of methylene blue occurs due to the isomorphic

substitution of atoms with the lowest valence in the tetrahedral layers of the crystal lattice structure of clay minerals. The number of active adsorbed centers depends on the structural features of the crystal lattice of clay minerals. The connection of methylene blue with the active adsorbed center occurs through its amino group or the central nitrogen atom. These processes are accompanied by a change in the color of the reagent used. The color of the clay after cleaning according to our method changes: the shade characteristic of the mineral montmorillonite becomes more pronounced. This allows us to assume that the proportion of the sorption-active mineral montmorillonite in the clay composition increases after its purification and enrichment. The study of the spatial structure showed that morphologically betonies consist of symmetric equated particles with an average particle size of 3-5 microns, which characterizes it as a mineral raw material with a high specific surface. Based on the energy dispersive spectrum, the chemical composition of Navbakhor betonies was determined, presented in Table 2.

Table 2. Chemical composition of betonies clays of the Navbakhor deposit

Name	The content of oxides, (the masses %)											
	SiO ₂	TiO ₂	Al ₂ O ₃	Fe ₂ O ₃	MgO	CaO	Na ₂ O	K ₂ O	P ₂ O ₃	SO ₃	FeO	ppp
Alkaline bentonite clay	59,91	0,35	13,89	5,10	1,94	0,49	1,53	1,95	0,43	0,95	----	18,91
Carbonate - palygorskite clay	48,99	----	9,83	----	3,94	10,09	----	1,80	1,99	----	3,41	34,33
Alkaline earth clay	58,33	0,81	13,58	8,50	3,98	0,89	0,99	3,30	0,93	0,49	----	14,08

According to the standards of the International Union of Theoretical and Applied Chemistry, the study of the specific surface area and porosity is mandatory when studying sorbents, since it allows you to identify a clay sample with the most optimal adsorption characteristics. Adsorption is determined by the presence of pores in the test sample. Pores with a diameter less than 0.4 nm are called submicropores, 0.4-3 nm in size - micro pores, 3-50 nm - micro pores, with a diameter of more than 50 nm - macro pores. Macropores act as channels for the penetration of substances into the sorbent. Mesopores are much smaller than macropores; their radius of curvature is from 3 to 50 nm, which is much larger than the dimensions of the adsorbed molecules. Filling the volume of these pores is already possible by the method of capillary condensation. At pressures below the corresponding capillary condensation, adsorption occurs on the mesopore surface. Micro pores are filled with volumetric filling. Table 3 shows the texture and adsorption characteristics of betonies clay.

Table 3. Textural and adsorption characteristics of bentonite clay

№	Name	index
1	Main faction	Less than 0.1 mm - 95%
2	Maximum bulk density, g/cm ³	0.935
3	Adsorption activity, bentonite, g	88.0±0,3
4	Cation exchange capacity, bentonite, eq	31.4
5	Specific surface area according to the single-point BET method, sm ² /g	58.5
6	Specific surface area according to the BET five-point method, sm ² /g	58.5
7	Pore volume at pressure P/P ₀ = 0.99, cm ³ /g	0.089
8	Average pore size, nm	4.9

From table 3 it follows that betonies is a fine crystalline powder of medium weight with satisfactory flow characteristics. The use of betonies powder in catalysis can be difficult. According to its adsorption characteristics, betonies is a combined micro-macro-micro porous adsorbents with a predominance of mesopores. Since the specific surface area is an average characteristic of the size of internal pores, its high indicator is due to the average pore size, which in betonies clay is 4.9 nm.

In order to standardize the method for determining the adsorption activity, the optimal conditions were selected according to the following indicators: the weight of the sample of the sorbent; sorption time; the volume or equilibrium concentration of the dye solution. Nine studies were conducted for each indicator. The results are shown in Table 4.

Table 4. The results of the quantitative determination of the adsorption activity of betonies clay according to the following parameters: weight of the sorbent sample, sorption time, volume or equilibrium concentration of the dye solution

Sample no.	1	3	3	4	5	8	9	9	9
m*, g	0,4	0,5	0,8	0,9	0,9	0,9	1,0	1,1	1,3
t, min	30								
V, ml	35								
A, betonies	81,9	81,9	81,9	83,0	83,0	59,9	59,3	58,0	53,1
Sample no.	10	11	13	13	14	15	18	19	19
m*, g	0,9±0,003								
t, min	3	5	10	15	30	35	30	35	40
V, ml	35								
A, betonies	5,9	13,3	39,9	49,1	83,0	83,1	83,0	83,3	83,3
Sample no.	19	30	31	33	33	34	35	38	39
m*, g	0,9								
t, min	30								
V, ml	15	30	35	30	35	40	90	50	55
A, betonies	31,3	35	44,9	55,3	83,0	83,1	83,1	83,3	83,1

As shown by the tabular data, an increase in the weight of a sample of betonies clay at the same sorption time and a constant volume of the dye solution leads to a decrease in the fixation of the adsorption activity of betonies. Increasing the sorption time or volume of methylene blue dye does not change the adsorption activity reading. A decrease in the sorption time or the volume of methylene blue dye leads to incomplete adsorption and a decrease in the adsorption activity index. Thus, according to the results of the conducted studies, an exponential dependence of the adsorption activity on the weight of the sample, the sorption time and the equilibrium concentration of the dye solution was established, which confirmed the advisability of choosing the correspondence of the sample (0.9 g), the sorption time (30 min) and the equilibrium concentration of the dye solution (35 ml 0.15%). Betonies was standardized according to the following parameters: description, pH of the aqueous suspension, weight loss on drying, adsorption activity, cat ion exchange capacity, heavy metals (arsenic), specific surface area, volume and average pore size. The obtained indicators are presented in table 5.

This, bentonite is a light gray powder, odorless, practically insoluble in water and organic solvents, the pH of the suspension (5 in 100) is 9.1-9.9. The weakly alkaline nature of the suspension is explained by the presence of alkaline earth and alkali metals in the clay composition. According to the adsorption characteristics, this is a combined meso-macro-microporous adsorbent, the specific surface of which is 54.5 m²/g, the pore volume is 0.085 cm³/g, the average pore size is 4.9 nm, the adsorption activity for methylene blue is 83.0 betonies, g. According to its technological characteristics, it is a finely dispersed medium-weight powder with an average flow ability index.

Table 5. Indicators of the quality of betonies clay

№	Characteristics	Bentonite clay
1	Description	Light gray powder, odorless, practically insoluble in water and organic solvents
2	pH of a suspension (5 in 100) in water	9.1-9.9
3	Weight loss on drying,%	88.0±0,3
4	Adsorption activity, bentonite, g	83.0±0,3
5	Cation exchange capacity, bentonite, eq	19.4
6	Arsenic	Absent
7	The ratio of the elements Si ⁴⁺ and Al ³⁺	3:1
8	Specific surface area according to the BET five-point method, m ² /g	54,5±3,0
9	Pore volume at pressure P/P ₀ = 0.99, cm ³ /g	0.085±0.005
10	Average pore size, nm	4.9

Analysis of derivatographic curves of betonies lines (Fig. 5) shows images of TG - thermal logarithmic gravimetric line, where a decrease in the initial mass of betonies is noted for a certain time, and DTG - differential thermal gravimetry shows a line of temperature parameters change.

The primary decomposition of betonies began at 90°C and ended at 300°C. The loss was due to absorbed structural water and other volatile impurities.

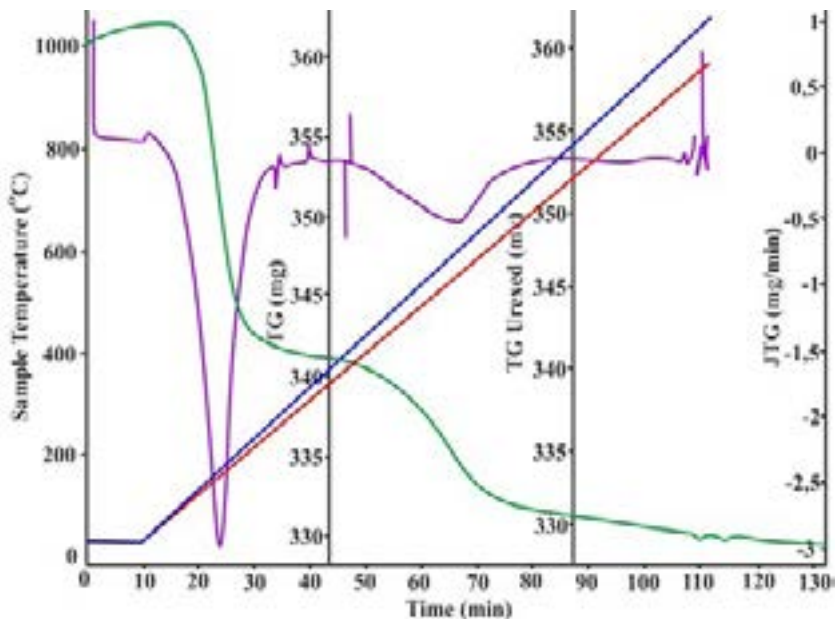


Figure 5. Derivatogram of bentonite from the Navbakhor field

At the second stage of decomposition at a temperature of 480°C, the remaining mass of 339 bentonite is reduced to 335 bentonite, or 3.9% of the original mass. At this stage, the decrease in mass occurs due to the evaporation of carbonates and other volatile impurities that can decompose at given temperatures. This took about 19 minutes. In total, the decomposition of bentonite took about 59 minutes, and the weight loss was 14% in total.

Conclusion. After that, the decomposition process stopped, and stable metal oxides may have remained on the solid support (betonies). Thus, when the derivatographic lines of coal and betonies were combined, they, in principle, turned out to be the same. In the process of derivatographic analysis of coal and betonies, the optimal parameters of decarburization were established: 800°C for 40 min and activation at 950°C for 90 min. The main parameters for further checking the quality of the obtained granules are the establishment of the sorption capacity, strength and the ability to regenerate for further repeated use.

One of the main properties of betonies, which is decisive for its use in industry,

is the ability to swell, that is, the ability to absorb water. In almost all areas of application, bentonites are used in ground form.

The chemical composition of the considered bentonites has been determined. It has been established that the particles of the montmorillonite mineral have sizes of 1.0–0.3 μm and more, with a thickness of 0.001–0.03 μm . The shape of the particles is poorly expressed, rarely hexagonal, and tends to form aggregates of particles. The data of thermo gravimetric studies were obtained and the temperature ranges of structural transformations and destruction of bentonite clays of the deposits under consideration were established.

Information about authors:

Khamroyev J.Kh. – Samarkand Medical Institute, Uzbekistan; *j.Xamroyev_1986@gmail.com*; <http://orcid.org/0000-0002-5583-0920>;

Akmalaiuly K. – Kazakh National Research Technical University named after K.I. Spayev (Strayed University), Almaty, Kazakhstan; *kakmalaev@mail.ru*; <https://orcid.org/0000-0002-9796-8813>;

Fayzullayev N. – Samarkand Medical Institute, Uzbekistan; *fayzullayev72@inbox.ru*; <http://orcid.org/0000-0001-5838-3743>.

REFERENCES

- [1] Bergaya F., Theng B.K.G., Lagaly G. Developments in Clay Science. V. 1. Handbook of Clay Science. Amsterdam: Elsevier Science, 2006. 1224 pp.
- [2] Dudina S.N. Investigation of the mechanism of activation of clays by electromagnetic action // Scientific Bulletin of BelSU. Ser. "Natural Sciences". - 2011. - No. 9 (104). Issue 15. - S. 110-113.
- [3] Ecology of waste water treatment by physical and chemical methods / NS. Serpukhlov, E.V. Wilson, S.V. Getmantsev, A.A. Marochkin. -M: ASV, 2009. -264 p.
- [4] Fedorin R.P., Khranchenkov M.G. Swelling of clays and filtration of solutions in clays // Scientific notes of Kazan State University. 2010. T. 152, No. 1. S. 235–243.
- [5] Gomelya N.D., Krysenko T.V., Shabliy T.A. Obtaining aluminum hydroxochlorides and assessing their effectiveness in water clarification. -Ecotechnology and resource saving. -2004. # 2. -S.49-51.
- [6] K. Akmalaiuly, N. Fayzullayev. Heterogeneous-catalytic synthesis of vinyl chloride and chloroprene from acetylene // Of the national academy of sciences of the republic of Kazakhstan series of chemistry and technology, (2020), Volume 5, Number 443 (2020), 6 – 13. <https://doi.org/10.32014/2020.2518-1491.74>.
- [7] Moiseenko T.I. Scattered elements in surface waters of the land: technophilicity, bioaccumulation and ecotoxicology. / T.I. Moiseenko, L.P. Kudryavtseva and others; M.: Nauka, 2006. – 261 p.
- [8] Orazova S.S., Belov V.M., Evstigneev V.V. Effectiveness of using natural sorbents of eastern Kazakhstan in water purification from ions of heavy metals (Cu²⁺) // Bulletin of the Tomsk Polytechnic University. 2008. T. 311, No. 2. S. 150-152.
- [9] Perelomov L.V., Lagunova N.L., Perelomova I.V., Syundyukova K.V., Khasaya D.A. Adsorption of lead by sodium bentonite and bentonite modified with aluminum hydroxide in

the presence of organic acids // *Izvestiya TulGU. Technical science.* 2013. No. 6. Part 2, pp. 238 – 245.

[10] Report on the state and protection of the environment of the Saratov region in 2014 –Saratov, 2015. – 244 p.

[11] Report on the state and protection of the environment of the Saratov region in 2015 – Saratov, 2016. – 248 p.

[12] Ramazanov A.Sh., Esmail G.K., Sveshnikova D.A. Kinetics and thermodynamics of sorption of heavy metal ions on montmorillonite-containing clay // *Sorption and chromatographic processes.* 2015. T. 15, No. 5. S. 682–682.

[13] Sokolova T.A., Dronova T.Ya., Tolpeshta I.I. Clay minerals in soils: a textbook. Tula: Grif and K, 2005.336 p.

[14] Sokolova T.A., Trofimov S.Ya. Sorption properties of soils. Adsorption. Cation exchange: a textbook on some chapters of soil chemistry. Tula: Grif and K, 2009.182 p.

[15] Stathi P., Papadas I.T., Tselepidou A., Deligiannakis Y. Heavy-metal uptake by a high cation-exchange-capacity montmorillonite: the role of permanent charge sites // *Global NEST Journa.* 2010. Vol. 12, no. 3. P. 248-255.

[16] Wei J., Zhuc, et al. Simultaneous sorption of crystal violet and 2-naphthol to bentonite with different CECs // *Journal of Hazardous Materials.* 2009. Vol. 166. P. 195-199.

CONTENTS

A.U. Abdullaev, Sh.S. Yusupov, L.Yu. Shin, A.V. Rasulov, Y.Zh. Yessenzhigitova HYDROGEOSEISMOLOGICAL PRECURSORS SUSAMYR EARTHQUAKE 1992.....	6
N.A. Abdimutalip, A.K. Kurbaniyazov, G. Toychibekova, G. Koishieva, G. Shalabaeva, N. Zholmagambetov INFLUENCE OF CHANGES IN THE LEVEL OF SALINITY OF THE ARAL SEA ON THE DEVELOPMENT OF ECOSYSTEMS.....	17
Zh.K. Aidarbekov, S.A. Istekova CLASSIFICATION OF GEOPHYSICAL FIELDS IN THE STUDY OF GEOLOGICAL AND STRUCTURAL FEATURES OF THE ZHEKAZGAN ORE DISTRICT.....	33
B. Almatova, B. Khamzina, A. Murzagaliyeva, A. Abdygalieva, A. Kalzhanova NATURAL SORBENTS AND SCIENTIFIC DESCRIPTION OF THEIR USE.....	49
Zh.A. Baimuratova, M.S. Kalmakhanova, SH.S.Shynazbekova, N.S. Kybyraeva, J.L. Diaz de Tuesta, H.T. Gomes MnFe ₂ O ₄ /ZHETISAY COMPOSITE AS A NOVEL MAGNETIC MATERIAL FOR ADSORPTION OF Ni(II).....	58
Ye.Z. Bukayev, G.K. Mutalibova, A.Z. Bukayeva A NEW TECHNOLOGY FOR MANUFACTURING POLYMER-CEMENT COMPOSITION FROM LIMESTONE-SHELL MINING WASTE.....	73
A.Zh. Kassenov, K.K. Abishev, A.S. Yanyushkin, D.A. Iskakova, B.N. Absadykov RESEARCH OF THE STRESS-STRAIN STATE OF HOLES WITH NEW BROACH DESIGNS.....	89
J.Kh. Khamroyev, K. Akmalaiuly, N. Fayzullayev MECHANICAL ACTIVATION OF NAVBAHORSK BENTONITE AND ITS TEXTURAL AND ADSORPTION CHARACTERISTICS.....	104

A.N. Kopobayeva, G.G. Blyalova, A. Bakyt, V.S. Portnov, A. Amangeldikyzy THE NATURE OF RARE EARTH ELEMENTS ACCUMULATION IN CLAY LAYERS AND COALS OF THE SHUBARKOL DEPOSIT.....	117
A. Leudanski, Y. Apimakh, A. Volnenko, D. Zhumadullayev, N. Seitkhanov CALCULATION OF FLOTATOR'S AERATOR FOR SEPARATION OF GROUND PLASTICS.....	131
Zh.T. Mukayev, M.M. Ulykpanova, Zh.O. Ozgeldinova, B.E. Kenzheshova, A.B. Khamitova CONTENT OF COPPER IN DESERT SOILS AND PLANTS OF EAST KAZAKHSTAN REGION.....	149
G. Sapinov, A. Imashev, Z. Mukhamedyarova CURRENT STATE OF THE PROBLEM OF MINING INDUCED SEISMICITY AND PROSPECT OF USING SEISMIC MONITORING SYSTEMS.....	161
V.G. Stepanets, V.L. Levin, G.K. Bekenova, M.S. Khakimzhanov, K.S. Togizov ACCESSORY COPPER ORE MINERALS AS A KEY ISSUE IN UNDERSTANDING THE GENESIS OF THE MAYATAS META-CARBONATITE ORES (ULYTAU, CENTRAL KAZAKHSTAN).....	172
S.A. Syedina, L.S. Shamganova, N.O. Berdinova, G.B. Abdikarimova MULTIVARIANT GEOMECHANICAL ESTIMATION OF THE DESIGN PARAMETERS' STABILITY OF SLOPE AND BENCH IN SOUTH SARBAI MINE.....	192
S.A. Tarikhazer, I.I. Mardanov INDICATORS OF ECOGEOMORPHOLOGICAL RISK FOR THE PURPOSE OF SUSTAINABLE DEVELOPMENT OF MOUNTAIN TERRITORIES.....	204
Zh.T. Tleuova, D.D. Snow, M.A. Mukhamedzhanov, E.Zh. Murtazin ASSESSMENT OF THE IMPACT OF HUMAN ACTIVITY ON GROUNDWATER STATUS OF SOUTH KAZAKHSTAN.....	217

Ye.A. Tseshkovskaya, A.T. Oralova, E.I. Golubeva, N.K. Tsoy, A.M. Zakharov	
DUST SUPPRESSION ON THE SURFACES OF STORAGE DEVICE OF TECHNOGENIC MINERAL FORMATIONS.....	230
B.T. Uakhitova, L.I. Ramatullaeva, M.K. Imangazin, M.M. Taizhigitova, R.U. Uakhitov	
ANALYSIS OF INJURIES AND PSYCHOLOGICAL RESEARCHES OF WORKERS IN THE MELTING SHOPS OF THE AKTUBINSK FERRALOYS PLANT.....	242
G.T. Shakulikova, S.M. Akhmetov, A.N. Medzhidova, N.M. Akhmetov, Zh.K. Zaidemova	
IMPROVING THE DESIGN OF INCLINED WELLS AS THE BASIS FOR THE DEVELOPMENT OF HARD-TO-RECOVER HYDROCARBON RESERVES.....	259
K.T. Sherov, M.R. Sikhimbayev, B.N. Absadykov, T.K. Balgabekov, A.D. Zhakaba	
STUDY OF TEMPERATURE DISTRIBUTION DURING ROTARY TURNING OF WEAR-RESISTANT CAST IRON.....	271

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

<http://www.geolog-technical.kz/index.php/en/>

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Редакторы: *М.С. Ахметова, А. Ботанқызы, Д.С. Аленов, Р.Ж. Мрзабаева*

Верстка на компьютере *Г.Д.Жадыранова*

Подписано в печать 19.04.2022.

Формат 70x90^{1/16}. Бумага офсетная. Печать – ризограф.

11,5 п.л. Тираж 300. Заказ 2.