

**ISSN 2518-170X (Online)**  
**ISSN 2224-5278 (Print)**

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ  
ҰЛТТЫҚ ФЫЛЫМ АКАДЕМИЯСЫ

Satbayev University

# ХАБАРЛАРЫ

---

## ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ  
НАУК РЕСПУБЛИКИ  
КАЗАХСТАН  
Satbayev University

## NEWS

OF THE ACADEMY OF SCIENCES  
OF THE REPUBLIC OF  
KAZAKHSTAN  
Satbayev University

SERIES  
OF GEOLOGY AND TECHNICAL SCIENCES

2 (458)  
MARCH – APRIL 2023

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

---

---

*NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.*

Қазақстан Республикасы Ұлттық ғылым академиясы «ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруды. Web of Science зерттеушілер, авторлар, баспашилар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енүі біздің қогамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

## **Бас редактор**

**ЖҰРЫНОВ Мұрат Жұрынұлы**, химия ғылымдарының докторы, профессор, КР ҰҒА академигі, Қазақстан Республикасы Ұлттық ғылым академиясының президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **H = 4**

## **Редакциялық алқа:**

**АБСАДЫКОВ Бахыт Нарикбайұлы**, техника ғылымдарының докторы, профессор, КР ҰҒА жауапты хатшысы, А.Б. Бектұров атындағы химия ғылымдары институты (Алматы, Қазақстан) **H = 5**

**ӘБСАМЕТОВ Мәліс Құдысұлы** (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, КР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **H = 2**

**ЖОЛТАЕВ Герой Жолтайұлы** (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, К.И. Сатпаев тындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **H=2**

**СНОУ Дэниел, Ph.D**, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **H = 32**

**ЗЕЛЬТМАН Реймар**, Ph.D, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **H = 37**

**ПАНФИЛОВ Михаил Борисович**, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **H=15**

**ШЕН Пин, Ph.D**, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастырының мүшесі (Пекин, Қытай) **H = 25**

**ФИШЕР Аксель**, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **H = 6**

**КОНТОРОВИЧ Алексей Эмильевич**, геология-минералогия ғылымдарының докторы, профессор, РГА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **H = 19**

**АГАБЕКОВ Владимир Енокович**, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жана материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **H = 13**

**КАТАЛИН Стефан**, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **H = 20**

**СЕЙТМҰРАТОВА Элеонора Юсуповна**, геология-минералогия ғылымдарының докторы, профессор, КР ҰҒА корреспондент-мүшесі, К.И. Сатпаев атындағы Геология ғылымдары институты зертханасының менгерушісі (Алматы, Қазақстан) **H=11**

**САҒЫНТАЕВ Жанай**, Ph.D, қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **H = 11**

**ФРАТТИНИ Паоло**, Ph.D, Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **H = 28**

---

**«ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Меншіктеуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РКБ (Алматы қ.).  
Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат  
комитетінде 29.07.2020 ж. берілген № KZ39VPY00025420 мерзімдік басылым тіркеуіне қойылу  
туралы қуәлік. Тақырыптық бағыты: *геология, мұнай және газды өңдеудің химиялық  
технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы*.  
Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19 <http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2023

---

Типографияның мекен-жайы: «Аруна» ЖҚ, Алматы қ., Мұратбаев көш., 75.

### **Главный редактор**

**ЖУРИНОВ Мурат Журинович**, доктор химических наук, профессор, академик НАН РК, президент Национальной академии наук Республики Казахстан, генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **H = 4**

### **Редакционная коллегия:**

**АБСАДЫКОВ Бахыт Нарикбаевич**, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **H = 5**

**АБСАМЕТОВ Малис Кудысович**, (заместитель главного редактора), доктор геологоминералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **H = 2**

**ЖОЛТАЕВ Герой Жолтаевич**, (заместитель главного редактора), доктор геологоминералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **H=2**

**СНОУ Дэниел**, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраски (штат Небраска, США) **H = 32**

**ЗЕЛЬТМАН Реймар**, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **H = 37**

**ПАНФИЛОВ Михаил Борисович**, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **H=15**

**ШЕН Пин**, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **H = 25**

**ФИШЕР Аксель**, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **H = 6**

**КОНТОРОВИЧ Алексей Эмильевич**, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **H = 19**

**АГАБЕКОВ Владимир Енокович**, доктор химических наук, академик НАН Беларусь, почетный директор Института химии новых материалов (Минск, Беларусь) **H = 13**

**КАТАЛИН Стефан**, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **H = 20**

**СЕЙТМУРАТОВА Элеонора Юсуповна**, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лаборатории Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **H=11**

**САГИНТАЕВ Жанай**, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **H = 11**

**ФРАТТИНИ Паоло**, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **H = 28**

---

**«Известия НАН РК. Серия геологии и технических наук».**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Собственник: Республикансское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № KZ39VPY00025420, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2023

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбая,

75.

### **Editorial chief**

**ZHURINOV Murat Zhurinovich**, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC "Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky" (Almaty, Kazakhstan) **H = 4**

### **E d i t o r i a l b o a r d:**

**ABSADYKOV Bakhyt Narikbaevich**, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

**ABSAMETOV Malis Kudysovich**, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

**ZHOLTAEV Geroy Zholtaevich**, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

**SNOW Daniel**, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

**ZELTMAN Reymar**, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

**PANFILOV Mikhail Borisovich**, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

**SHEN Ping**, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

**FISCHER Axel**, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H=6**

**KONTOROVICH Aleksey Emilievich**, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

**AGABEKOV Vladimir Enokovich**, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

**KATALIN Stephan**, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

**SEITMURATOVA Eleonora Yusupovna**, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

**SAGINTAYEV Zhanay**, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H = 11**

**FRATTINI Paolo**, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

---

**News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.**

**ISSN 2518-170X (Online)**,

**ISSN 2224-5278 (Print)**

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections*.

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

---

**© National Academy of Sciences of the Republic of Kazakhstan, 2023**

Address of printing house: ST «Aruna», 75, Muratbayev str, Almaty.

NEWS of the National Academy of Sciences of the Republic of Kazakhstan  
 SERIES OF GEOLOGY AND TECHNICAL SCIENCES  
 ISSN 2224-5278  
 Volume 2, Number 458 (2023), 160–167  
<https://doi.org/10.32014/2023.2518-170X.291>  
 UDC 622:004.896

© Y.G. Neshina<sup>1</sup>, A.D. Mekhtiyev<sup>2\*</sup>, V.V. Yugay<sup>1</sup>, A.D. Alkina<sup>1</sup>, P.Sh. Madi<sup>1</sup>, 2023

<sup>1</sup>Abylkas Saginov Karaganda Technical University, Karaganda, Kazakhstan;

<sup>2</sup>S. Seifullin Kazakh Agrotechnical University, Astana, Kazakhstan.

E-mail: barton.kz@mail.ru

## DEVELOPING A SENSOR FOR CONTROLLING THE PIT WALL DISPLACEMENT

**Neshina Yelena** — Candidate of Technical Sciences. Head of the Energy Systems Department. Abylkas Saginov Karaganda Technical University

<https://orcid.org/0000-0002-8973-2958>. E-mail: 1\_neg@mail.ru;

**Mekhtiyev Ali** — Candidate of Technical Sciences, Professor of the Electrical Equipment Operation Department, S. Seifullin Kazakh Agrotechnical University

<https://orcid.org/0000-0002-2633-3976>. E-mail: barton.kz@mail.ru;

**Yugay Vyacheslav** — PhD, head of the Automation of Production Processes Department. Abylkas Saginov Karaganda Technical University

<https://orcid.org/0000-0002-7249-2345>;

**Alkina Aliya** — Master of Engineering. Senior Lecturer of the Information Technologies and Security Department. Abylkas Saginov Karaganda Technical University

<https://orcid.org/0000-0003-4879-0593>. E-mail: alika\_1308@mail.ru;

**Madi Perizat** — Master of Electrical Engineering. Senior lecturer of the Energy Systems Department Abylkas Saginov Karaganda Technical University

<https://orcid.org/0000-0001-5930-8112>. E-mail: peri@mail.ru.

**Abstract.** The work deals with developing a pit wall displacement sensor. The analysis of the existing solutions has been carried out, their advantages and disadvantages have been given. An imitation laboratory bench has been presented with which use there were studied rock displacement sensors. The sensor has been developed on the basis of a new method of controlling additional optical losses. A source of coherent optical radiation with the wavelength of 1310 or 1550 nm has been used in the experiments. The sensor has a plastic case with two input adapters for optical connectors. One of them moves, the other does not move, and an elastic element is located between them. The light wave generated by the radiation source passes through the sensor and returns to the optical power meter. The sensor has been calibrated using a measuring scale with a division value of 1 mm. Depending on the distance between the ends of the optical fiber, the losses vary linearly. The use of a single-mode optical fiber for determining the displacement of the sides of a quarry is very promising, since the fiber-optic sensors developed on its basis have a sufficiently high accuracy, measurement speed, and good linearity of characteristics. The geotechnical parameters of the displacement of the sides of the open pit, which determine the danger of collapses that occur during the operation of technological equipment in the course of mining, are considered.

**Keywords:** fiber optic sensor, monitoring system, rock displacement, safety, optical fiber, deformation, safety

© Е.Г. Нешина<sup>1</sup>, А.Д. Мектиев<sup>2\*</sup>, В.В. Югай<sup>1</sup>, А.Д. Алькина<sup>1</sup>, П.Ш. Мәди<sup>1</sup>, 2023

<sup>1</sup>Әбілқас Сағынов Атындағы Қарағанды Техникалық Университеті, Қарағанды, Қазақстан;

<sup>2</sup>С.Сейфуллин атындағы Қазақ агротехникалық университеті, Астана, Қазақстан.

E-mail: barton.kz@mail.ru

## КАРЬЕР БОРТТАРЫНЫң ҮҒЫСУЫН БАҚЫЛАЙТЫН ДАТЧИКТІ ӘЗІРЛЕУ

**Аннотация.** Бұл мақала карьер бортының сенсорын әзірлеуге арналған. Қолданыстағы шешімдердің жұмысына талдау жасалды, олардың артықшылықтары мен кемшіліктері көлтірілді. Имитациялық зертханалық стенд ұзынды, оның көмегімен тау жыныстарының орын ауыстыру сенсорына зерттеулер жүргізілді. Сенсор қосымша оптикалық шығындарды бақылаудың жаңа әдісі негізінде жасалған. Тәжірибелерде толқын ұзындығы 1310 немесе 1550 нм болатын когерентті оптикалық сәулелену көзі қолданылды. Сенсорда оптикалық қосқыштарды қосуға арналған екі кіріс адаптері бар пластикалық корпус бар. Біреуі қозғалады, екіншісі қозғалмайды және олардың арасында

серпімді элемент бар. Сәулелену көзі тудыратын жарық толқыны сенсор арқылы өтіп, оптикалық қуат өлшегішіне оралады. Датчикті калибрлеу 1 мм бөлү бағасымен өлшеу шкаласы бойынша жүргізді. оптикалық талшықтың ұштары арасындағы қашықтыққа байланысты шығындар сызықтық заңға сәйкес өзгереді. Карьерлердің бүйірлік жылжуын анықтау үшін бір режимді оптикалық талшықты пайдалану өте перспективалы, өйткені оның негізінде жасалған талшықты-оптикалық датчиктер өте жоғары дәлдікке, өлшеу жылдамдығына ие және өнімділіктің жақсы сызықтығына ие. Пайдалы қазбаларды өндіру процесінде технологиялық жабдықтың жұмысы кезінде пайда болатын құлау қаупін анықтайтын Карьер бортының жылжуының геотехникалық параметрлері қарастырылады.

**Түйін сөздер:** талшықты-оптикалық датчик, бақылау жүйесі, карьер борттарының ығысуы, қауіпсіздік, оптикалық талшық, деформация, қауіпсіздік

© Е.Г. Нешина<sup>1</sup>, А.Д. Мехтиев<sup>2\*</sup>, В.В. Югай<sup>1</sup>, А.Д. Алькина<sup>1</sup>, П.Ш. Мади<sup>1</sup>, 2023

<sup>1</sup>Карагандинский технический университет имени Абылкаса Сагинова, Караганда, Казахстан;

<sup>2</sup>Казахский агротехнический университет им. С. Сейфуллина, Астана, Казахстан.

E-mail: barton.kz@mail.ru

## РАЗРАБОТКА ДАТЧИКА КОНТРОЛЯ СМЕЩЕНИЯ БОРТОВ КАРЬЕРОВ

**Нешина Елена Геннадьевна** — канд. техн. наук, заведующая кафедрой «Энергетические системы» Карагандинского технического университета имени Абылкаса Сагинова

<https://orcid.org/0000-0002-8973-2958>. E-mail: 1\_neg@mail.ru;

**Мехтиев Али Джаванширович** — канд. техн. наук, ассоциированный профессор кафедры эксплуатации электрооборудования Казахского агротехнического университета им. С. Сейфуллина

<https://orcid.org/0000-0002-2633-3976>. E-mail: barton.kz@mail.ru;

**Югай Вячеслав Викторович** — доктор PhD, заведующий кафедрой «Автоматизация производственных процессов» Карагандинского технического университета имени Абылкаса Сагинова

<https://orcid.org/0000-0002-7249-2345>;

**Алькина Алия Даuletхановна** — магистр технических наук, старший преподаватель кафедры информационных технологий и безопасности Карагандинского технического университета имени Абылкаса Сагинова

<https://orcid.org/0000-0003-4879-0593>. E-mail: alika\_1308@mail.ru;

**Мади Перизат Шаймуратовна** — магистр электроэнергетики, старший преподаватель кафедры «Энергетические системы» Карагандинского технического университета имени Абылкаса Сагинова

<https://orcid.org/0000-0001-5930-8112>. E-mail: peri@mail.ru.

**Аннотация.** Данная статья посвящена разработке датчика смещения бортов карьера. Проведен анализ работ существующих решений, приведены их плюсы и недостатки. Представлен имитационный лабораторный стенд, с помощью которого были проведены исследования датчика смещения горных пород. Датчик разработан на основе нового метода контроля дополнительных оптических потерь. В экспериментах использовался источник когерентного оптического излучения с длиной волны 1310 или 1550 нм. Датчик имеет пластиковый корпус с двумя входными адаптерами для подключения оптических коннекторов. Один из которых двигается, другой — нет, а между ними расположен упругий элемент. Световая волна, генерируемая источником излучения, проходит через датчик и возвращается к измерителю оптической мощности. Калибровка датчика выполнялась при помощи измерительной шкалы с ценой деления 1 мм. В зависимости от расстояния между торцами оптического волокна потери изменяются по линейному закону. Использование одномодового оптического волокна для идентификации смещения бортов карьеров является весьма перспективным, так как разработанные на его основе волоконно-оптические датчики обладают достаточно высокой точностью, скоростью измерения и имеют хорошую линейность характеристик. Рассмотрены геотехнические параметры смещения бортов карьера, определяющие опасность обрушений, возникающих при работе технологического оборудования в процессе добычи полезного ископаемого.

**Ключевые слова:** волоконно-оптический датчик, система мониторинга, смещение бортов карьера, безопасность, оптическое волокно, деформация, безопасность

### Introduction

The pits are characterized by high labor productivity, low production costs, integrity of mining, optimal and relatively safe working conditions. Full development and extraction of minerals should be accompanied by the minimum amount of overburden. Vice versa, it is possible to achieve the minimum cover layer in a pit only when the problem of ensuring stability of the pit walls is solved.

The advantages of fiber-optic sensors and technologies in relation to stability of open pit walls are as follows: the use of these systems to control geotechnical parameters, which make it possible to ensure the

required level of safety in mining operations with minimal energy consumption; no need for multiple power supplies; explosion hazard to ensure that the optical fiber must not cause sparks; high corrosion resistance; they eliminate the effects of electromagnetic interference; optical fiber sensors are more sensitive and stable, easy to reuse in communication lines. Unlike traditional instrumental observations and new methods (scanning the pit walls), fiber-optic sensors have a number of significant advantages in terms of measurement speed and are insensitive to many external effects. At the same time, energy consumption is ten times lower than the information transmission over the air or a copper cable.

At present, the development of coal mines and quarries is characterized by modernization, the acquisition of new mining technologies, the use of new technological solutions, which lead to improving mining operations. In this case, open pit mining will play a special role in reliably explaining, presenting and monitoring the stability status of pit walls.

The modern scale of mining requires in-depth research and constant monitoring of geotechnical processes occurring on the pit walls during the pit operation. It is desirable to equip every pit with an automated system for monitoring the wall stability.

Under the conditions of open pit mining, geomechanical processes (Nizametdinov et al., 2015: 1; Reed et al., 2015: 2) are understood to mean various kinds of deformations in the pit. Many scientists have been studying the deformations of the pit walls and their classification (Chotchayev, 2016: 3; Buymistryuk, 2011: 4; Baibatsha et al., 2020: 5; Mekhtiev et al., 2021: 6).

### **Relevance and problem definition**

The pit wall stability is determined by the power state of the rocks. The deformation conditions and the stress state of the near-edge massif are made up of a combination of various factors, which are divided into two categories: natural and mining. Natural factors include the climate (air temperature, precipitation, wind potential, temperature conditions of rocks); geology (composition, structure, condition and nature of rocks); hydrogeology (presence of surface waters and aquifers, flood contact and structural disturbances). Mining factors are the method of developing the site, the development complex, the method of crushing the rock massif of the pit, the method of dumping layers and geometric parameters.

The most significant factors that affect pit wall stability are physical and mechanical properties of rocks and contacts with rocks; the structure and design characteristics of the array of devices; geometric parameters of the slope; stress-strain state of the array of devices. The first two factors of production technology are natural and inherent factors of this particular field. They cannot be changed and must be studied and taken into account when calculating the stability of the side. The third and fourth factors are related to the mining technology used and must be determined in the process of solving the problem of ensuring the stability of the pit wall.

A number of Kazakhstan and foreign scientists are engaged in studying the impact of drilling and blasting on the made of rock and semi-rock pit slope stability (Buimistryuk, 2013: 7; Volchikhin, 2001: 8; Kamenev et al., 2014: 9; Liu et al., 2013: 10; Yiming et al., 2016: 11; Kim et al., 2015: 12; Wu et al., 2011: 13; Mekhtiev et al., 2020: 14). However, due to the diversity of the mining and geological features of the deposits and the mining conditions developed in the pits, the solutions proposed in these works cannot always be used in the other pits. In addition, all the works on this issue are aimed at studying the effect of large-scale explosions on the state of non-working (stationary) pit walls stability, as well as the effect of pit walls on the profile of the production limit.

Analyzing the existing methods of calculating open pit slopes stability, it should be noted that quite reliable calculation schemes have been developed that correspond to various mining, geological and mining conditions prevailing in the field. Various geological characteristics of the developed fields exclude the existence of a universal solution to this problem. The work of scientists from different countries has attracted attention in the field of deformation measurement of the underground infrastructure, including that in the mining industry (Kamenev et al., 2014: 9; Liu et al., 2013: 10; Yiming et al., 2016: 11; Kim et al., 2015: 12; Wu et al., 2011: 13; Mekhtiev et al., 2020: 14; Chaulya et al., 2016: 15), where the measurement of deformation over the almost infinite length allows fixing the deformation field caused by underground work in the excavation deformation field.

### ***Analysis of literature and scientific achievements in the field of using optical fiber as sensors***

Since 2006, in the mining industry there has been introduced the optical fiber technology for strain detection (Nizametdinov et al., 2015: 1; Reed et al., 2015: 2). The world manufacturers of fiber-optic sensors are the Siemens, the ABB, the Rockettes, the Waterford, the Bedhess, the Halliburton, the Schlumberger companies, as well as the Russian companies such as the Intel-Systems, the Omega, the Optolink. The analysis of the world experience in the development of fiber optic sensors in Western Europe and the USA, as well as the developments of scientists from the CIS countries, shows that the work is aimed at improving and

developing various fiber optic technologies for controlling, monitoring and measuring (Buimistryuk, 2013: 7; Volchikhin, 2001: 8; Kamenev et al., 2014: 9; Liu et al., 2013: 10; Yiming et al., 2016: 11; Kim et al., 2015: 12; Wu et al., 2011: 13; Mekhtiev et al., 2020: 14). The issues related to the production of optical fiber are considered. The studies are being carried out on the use of fiber optic sensors to develop an internal fiber optic network in order to collect information in conditions of increased risk of sparking and explosion hazards. In particular, a lot of work (Yiming et al., 2016: 11; Kim et al., 2015: 12; Wu et al., 2011: 13) deals with the use of fiber optic sensors as a promising tool for monitoring, measuring and controlling parameters in national defense, aerospace, aviation, transport, oil and gas industries, as well as in construction and medicine.

The development of a hardware-software complex for security control based on the use of optical fiber will make it possible to abandon the use of equipment for measuring technical parameters and switch to the use of fiber-optic sensors. Fiber optic sensors are widely used in various industries around the world. For example, an optical fiber sensor was used for current measurement, as well as in buildings and structures. The optical fiber technology was also introduced in the mining industry for strain detection, detection of underground gases such as methane and monitoring the underground environment (Volchikhin, 2001: 8; Kamenev et al., 2014: 9; Liu et al., 2013: 10; Yiming et al., 2016: 11; Kim et al., 2015: 12; Wu et al., 2011: 13). Chinese scientists T. Li, Ch. Wang, Yu. Chao, and Yu. Ning developed an integrated hazard detection system consisting of methane sensors, pressure sensors, and temperature sensors installed in underground mines (Wang et al., 2016: 16; Manbetova et al., 2021: 21; Alkina et al., 2017: 17). An integrated data fusion system was also developed to provide self-diagnosis and statistical analysis of the state of sensors, visual, sound and mobile text information. Experimental studies were very successful, and then the authors began to develop a method of determining seismic energy.

At present, the development of pits is characterized by the improvement of new processes and acquisition of new tools, the latest technological solutions in the extraction of mineral deposits for smooth and safe operation of mining enterprises. In this regard, a special role is assigned to reliable justification and ensuring safety in monitoring the open pit walls stability.

The proposed sensor is based on the previously proposed principle of pressure measurement using the method of controlling additional losses in the optical fiber under mechanical action. One can be familiarized with the patent (Chaulya et al., 2016: 15; Orazbayeva et al., 2022: 20). The basis of the proposed method is assessing additional losses in an optical fiber during its deformation, which use was considered in (Lanciano et al., 2020: 18; Orazbayeva et al., 2022: 22; Yakubova et al., 2016: 19). The principle of operation and design of a fiber-optic sensor for monitoring rock pressure in underground workings are given in (Yugay et al., 2020: 20). The considered sensor has basically an optical fiber of the G 652 standard.

#### *Developing a fiber optic rock displacement sensor and a measurement system*


For practical implementation of the studies carried out, to test the scientific hypothesis put forward about the use of optical fiber to build a complex for monitoring wall displacements, an imitation laboratory bench has been developed. Figure 1 shows a laboratory sample of a fiber optic pit wall displacement sensor. The source of optical radiation is SmartPocket OLS-34/35/36 with built-in Auto- $\lambda$  and Multi- $\lambda$  options, SmartPocket OLP-38, which can automatically measure the power level and insertion loss in a single-mode and multimode optical cable. The connection to the optical fiber is made through a universal UPP 2.5 mm adapter and optical connectors of the SC type.



Figure 1 – Laboratory sample of a fiber optic pit wall displacement sensor

When the ends of the ferrules into which the optical fiber is inserted, diverge up to 15 mm, the measurement range can be extended up to 100 mm, if needed. So far, there are limitations associated with the parameters of the used ferrules, which edged the ends of the OF and the tube in which the ferrules move. One can connect several sensors in series or use a transmission mechanism to increase the divergence distance of the OF. When the ends of the fiber move away from each other, additional losses increase, which are recorded by an optical wattmeter. The farther the optical fiber ends diverge from each other, the greater the level of additional losses and loss of optical power. The scheme of the laboratory bench is shown in Figure 2.

A source of coherent optical radiation with the wavelength of 1310 or 1550 nm has been used in the experiments. The sensor has a plastic case, with two input adapters for optical connectors, one of which moves, the other does not move, and an elastic element is located between them. The light wave generated by the radiation source passes through the sensor and returns to the optical power meter.

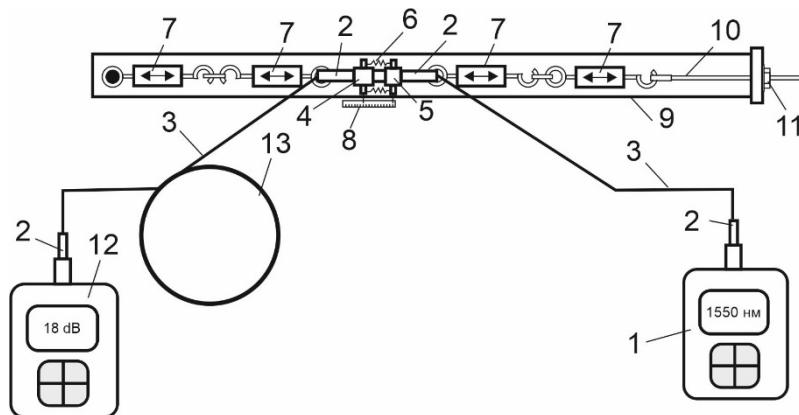

1 - radiation source of the invisible range 1550 nm; 2 - optical SC convector; 3 - fiber optic patch cord; 4 - fixed part of the fiber-optic displacement sensor; 5 - moving part of the fiber-optic displacement sensor; 6 - spring; television matrix, 7 - tension clutch; 8 - displacement report scale; 9 - base; 10 - pin for adjusting the position of the moving part of the sensor; 11 - nut; 12 - optical power meter; 13 - a loop of fiber-optic patch cord 30 meters long

Figure 2 - The experiment design

The results of the experiments are presented as a graph of the optical losses dependence on the value of displacements (Figure 3).


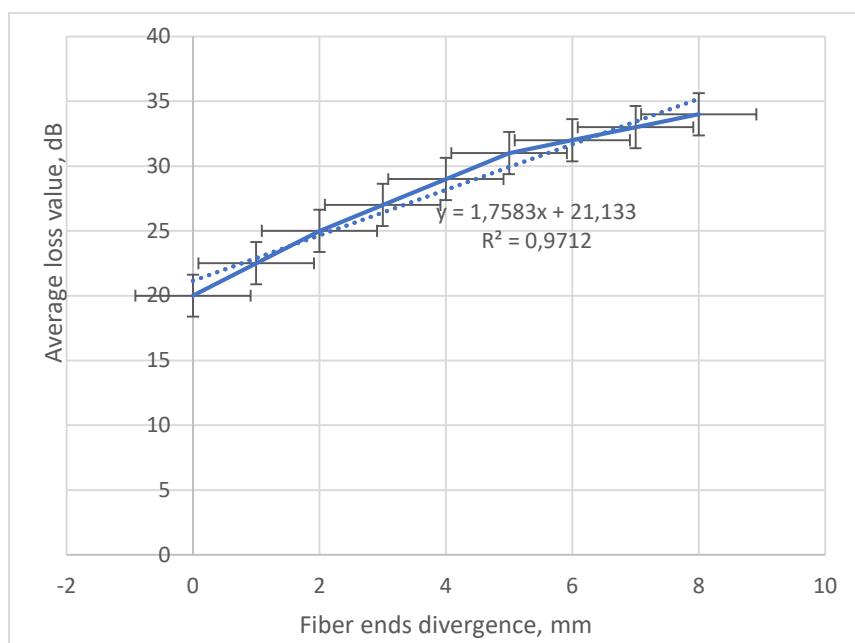


Figure 3 - Graph of the optical losses dependence on the value of displacements

The sensor was calibrated using a measuring scale with a division value of 1 mm. Depending on the distance between the ends of the optical fiber, the losses vary linearly. The considered sensor has basically an optical fiber of the G 652 standard.

At the present time, the control of the displacement of the walls is performed with the help of benchmarks, as well as visual and instrumental observations with participation of mine surveyors. The accuracy of control is affected by the human factor; it is also necessary to take into account the suddenness of changes in rock pressure in certain areas and the formation of emergency zones of collapse. Long-term monitoring changes in rock pressure shows a rather acute problem of sudden collapse of the open pit walls that leads to a danger to the life of personnel, equipment and significant financial costs. Therefore, there is a need to develop a hardware-software complex for monitoring the pit wall stability using fiber-optic sensors, which will provide more reliable data and remote monitoring in real time, preventing cases of sudden collapse of the edge massif.

Figure 4a shows the block diagrams of the sensor in its normal position in the absence of rock movement. Figure 4b shows the situation when there are displacements of the pit wall rocks and crack opening.

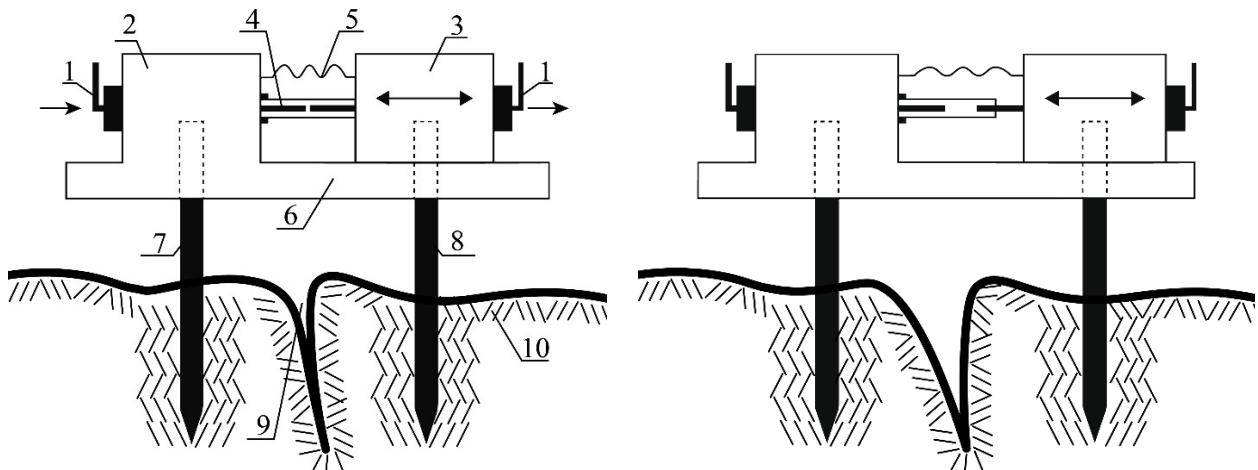

a) at the initial moment of crack opening; b) the process of crack opening

Figure 4 - Sensor in normal and offset position:

1 - optical fiber, 2 - fixed connector, 3 - movable connector, 4 - ferrule, 5 - spring, 6 - base,  
7 - fixed reference point, 8 - movable reference point, 9 - crack, 10 - soil

Using the results of the laboratory tests, a prototype sensor has been developed (see Figure 5).



Figure 5-A prototype of the sensor

The sensitivity of the developed sensor is several times higher than that of the applied mechanical reference stations. At the same time, it should be taken into account that the operator controls the parameters of the reference station visually and it is possible to notice the benchmark displacement by at least 5 mm, which is the division price, while the sensor is capable of capturing changes of 1 mm, the measurements are made remotely in real time. If needed, the measuring range of the sensor can be 0–100 mm. The sensitivity threshold is 1 mm. The effectiveness of the proposed control system lies in the fact that this system is able to control the initial displacements and to fix the initial moment of crack growth, which is important for making decisions on controlling the pit wall stability.

## Conclusions

The work is aimed at solving production problems associated with improving the safety of mining operations at the Kenzhem pit of the AC Altynalmas JSC. The use of the proposed sensor will make it possible to control remotely stability of the pit walls in real time. The obtained results of laboratory studies allow stating that the developed sensor has a fairly good linearity of characteristics and low power consumption, and is also capable of operating at the distance of up to 30 km with a radiation source power of lower than one watt, which is much lower compared to the existing traditional electrical measuring systems. The development of the own circuit solutions and a hardware-software complex, as well as the use of standard telecommunications equipment, radiation sources, photodetectors, connectors, can significantly reduce the cost of the sensor as a whole, which can ensure its practical implementation.

This research has been funded by the Science Committee of the Ministry of Science and Higher Education of the Republic of Kazakhstan (Grant No. AP14869145 "Development of an intelligent fiber-optic system for monitoring the geotechnical condition of mining pits and sections").

## REFERENCES

- Nizametdinov F.K., Ozhigin S.G., Ozhigina S.B., Dolgonosov V.N., Radey K., Stankova G., 2015. Monitoring the state of pit slopes and walls. Monograph Research Geodetic, Topographic and Cartographic Institute, town. Zdiby, Czech Republic Zdiby, 350 (in Russ.).
- Reed J., Stacey P., 2015. Pit wall design guide/ Edited by. Jurist, 544 p. (in Eng.).
- Chotchayev Kh.O., 2016. Control of the stress-strain state of a rock mass by sound-metric and geophysical methods. Geology and Geophysics of the South of Russia. Vol. 3. Pp. 129–140 (in Russ.).
- Buimistryuk G.Ya., 2011. Principles of building intelligent fiber-optic sensors. Photon-Express. Vol. 6 (43). Pp. 38–39 (in Russ.).
- Baibatsha A.B., Muszyński A.A., Shaiyakmet T.K., Shakirova G.S., 2020. 3D Modeling For Estimation Of Engineering-Geological Conditions Of Operating Mineral Deposits. News Of The National Academy Of Sciences Of The Republic Of Kazakhstan Series Of Geology And Technical Sciences. Vol. 4. Number 442.19–27. <https://doi.org/10.32014/2020.2518-170X.80> (in Eng.).
- Mekhtiev A.D., Yurchenko A.V., Ozhigin S.G., Neshina E.G., Al'kina A.D., 2021. Quasi-Distributed Fiber-Optic Monitoring System for Overlying Rock Mass Pressure on Roofs of Underground Excavations. Journal of Mining Science. Vol. 57(2). Pp. 354–360. <https://doi.org/10.1134/S1062739121020198> (in Eng.).
- Buimistryuk G., 2013. Fiber-optic sensors for extreme conditions // Control engineering Russia. Vol. 3. (45), Pp.34–40 (in Russ.).
- Volchikhin V.I., Murashkina T.I., 2001. Problems of creating fiber-optic sensors. Sensors and systems. Measurement, control, automation. Vol 7. Pp. 54–58 (in Russ.).
- Kamenev O.T., Kulchin Yu.N., Petrov Yu.S., 2014. Khizhnyak Application of a fiber-optic Mach-Zehnder interferometer to create long-baseline strainmeters Tech. Vol. 40. (3). Pp. 49–56 (in Russ.).
- Liu T., Wei Y., Song G., Li Y., Wang J., Ning Y., Lu Y., 2013. Advances of optical fiber sensors for coal mine safety monitoring applications. Proceedings of the 2013 International Conference on Microwave and Photonics, 102–111. <https://doi.org/10.1109/ICMAP.2013.6733455> (in Eng.).
- Yiming Zhao, Nong Zhang and Guangyao Si, 2016. A fiber bragg grating-based monitoring system for roof safety control in underground coal mining. Sensors (Switzerland). Vol.16. Pp. 112—117. <https://doi.org/10.3390/s16101759> (in Eng.).
- Kim S.T., Park Y.-H., Park S.Y., Cho K., Cho J.-R., 2015. A sensor-type PC strand with an em-bedded FBG sensor for monitoring prestress forces // Sensors (Switzerland). Vol. 15. Pp. 1060–1070. DOI: 10.3390/s150101060 (in Eng.).
- Wu L., Jiang Z., Cheng W., Zuo X., Lv D., Yao Y., 2011. Major accident analysis and prevention of coal mines in China from the year of 1949 to 2009. Mining Science and Technology, Vol. 21(5). Pp. 693–699. <https://doi.org/10.1016/j.mstc.2011.03.006> (in Eng.).
- Mekhtiev R.A., Mekhtiev A.D., Alkina A.D., Neshina Ye.G., Madi P.Sh., Kovtun A.A., 2020. Fiber optic pressure sensor. RK utility model patent No. 5045 dated 06/12/2020. (Application for the issuance of a patent of the Republic of Kazakhstan for a utility model № 2019/1066.2 dated 05.12.2019) (in Russ.).
- Chaulya S.K., Prasad G.M., 2016. Sensing and Monitoring Technologies for Mines and Hazardous Areas Monitoring and Prediction Technologies. Amsterdam: Elsevier, 432 p. (in Eng.).
- Wang W.J., Yuan C., Guo G.Y., Yu W.J., 2016. Control of malignant expansion of plastic zone in surrounding rock of rock roadway under the conditions of violent mining. J Min Saf Eng. Vol.33(6). Pp.957–64 (in Eng.).
- Alkina A., Mekhtiyev A., Neshina Y., Sansyzbay K., Yurchenko A., 2022. Studying additional losses of standard g.652 optical fiber with protective cladding during multiple bending to develop weight control sensor, Journal of Theoretical and Applied Information Technology. Vol. 100(7). Pp. 1983–1995 (in Eng.).
- Lanciano Ch., Salvini R., 2020. Monitoring of Strain and Temperature in an Open Pit Using Brillouin Distributed Optical Fiber Sensors. Sensors. Vol.20. DOI:10.3390/s20071924 (in Eng.).
- Orazbayeva K.N., Moldasheva Z.Zh., Orazbayev B.B., Ospanov Y.A., Iskakova S.Sh., 2022. Modeling and optimization of operating modes of oil heating tube furnaces. News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences. 2022(5). Pp.56–175. DOI 10.32014/2518-170X\_2022\_5\_455\_156-175.
- Manbetova Z.D., Abdimuratov Z.S., Chezhimbayeva K.S., Zhazykbayeva Z.M., Imankul M.N., 2021. Comparative analysis of methods and model of protection against electromagnetic fields in cellular communication. Vol. 11. № 1. Pp. 1–8.
- <http://praiseworthyprize.org/jsm/index.php?journal=irecap&page=article&op=view&path%5B%5D=25370>
- Orazbayeva K.N., Urazgaliyeva M.K., Moldasheva Zh.Zh., Shazhdekeyeva N.K., Kozhakhmetova D.O., 2022. Problems of increasing the depth of geological exploration and oil refining in kazakhstan and approaches to their solution. *News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences*, 2022 6 (456). 168–278. DOI 10.32014/2518-170X.247.

Yugay V., Mekhtiyev A., Neshina Y., Madi P., Alkina A., Gazizov F., Afanaseva O., Ilyashenko S., 2022. Fiber-Optic System for Monitoring Pressure Changes on Mine Support Elements. Sensors. Vol. 22(5). 1735. Pp. 1–6. <https://doi.org/10.3390/s22051735> (in Eng.).

## CONTENTS

<b>A.E. Abetov, Sh.B. Yessirkepova, J. Curto Ma</b>	
REMOTE SENSING AT THE STUDY OF THE THERMAL FIELD OF THE SOUTH USTYURT REGION TO FIND HYDROCARBON DEPOSITS.....	6
<b>K.I. Akhmetov, G.M. Yessilkanov, A.Zh. Kassanova, A.V. Ubaskin, T.Zh. Abylkassanov</b>	
HYDROGEOCHEMICAL FEATURES OF THE WATER OF SALINE LAKES IN PAVLODAR REGION.....	17
<b>S.V. Gladyshev, K.Sh. Akhmetova, L.M. Imangalieva, A.K. Kasymzhanova, N.K. Akhmadieva</b>	
STUDY OF PURIFICATION OF COPPER ELECTROREFINING SOLUTION BY FLOW CENTRIFUGATION.....	26
<b>D.A. Davronbekov, X.F. Alimjanov, K.S. Chezhimbayeva</b>	
METHODS FOR REMOTE MONITORING OF BRIDGES UNDER THE INFLUENCE OF GROUNDWATER ON THEM.....	37
<b>ZH.E. Daribayev, A.N. Kutzhanova, G.I. Issayev, I.G. Ikramov, D.U. Seksenova</b>	
ASSESSMENT OF ENVIRONMENTAL DAMAGE OF NON-FERROUS METALLURGY WASTE TO THE ENVIRONMENT.....	48
<b>K.R. Dzhabagieva, G.V. Degtyarev, A.M. Baytelieva, S.M. Laiyk, R.A. Pernebayeva</b>	
FINITE ELEMENT STUDIES OF FLOW PROCESSES IN HYDROCYCLONES AND LOSS OF HEAD-ON FLOW MIXING.....	57
<b>R.I. Yegemberdiev, I.N. Stolpovskikh, A.D. Kolga</b>	
IMPROVEMENT OF THE SYSTEM OF EXPLOSIONS OF RING HOLES DURING THE DEVELOPMENT OF LOW-POWER ORE DEPOSITS.....	68
<b>A.A. Yerzhan, P.V. Boikachev, S. Virko, Z.D. Manbetova, P.A. Dunayev</b>	
A NEW METHOD OF MATCHING THE SYNTHESIS OF MATCHING DEVICES BASED ON MODIFIED APPROXIMATION IN TELECOMMUNICATION DEVICES.....	77
<b>N.Zh. Zholamanov, S.M. Koibakov, S.T. Abildayev, G.A. Sarbassova, M.T. Omarbekova</b>	
RECOMMENDATIONS FOR THE USE AND DESIGN OF FISH PROTECTION AND FISH PASSING STRUCTURES UNDER GEOLOGICAL CONDITIONS.....	85
<b>L.Z. Issayeva, E. Slaby, S.K. Assubayeva, M.K. Kembayev, K.S. Togizov</b>	
THE THREE-DIMENSIONAL MODEL OF THE AKBULAK RARE EARTH DEPOSIT (NORTHERN KAZAKHSTAN).....	96
<b>A.A. Kabdushev, F.A. Agzamov, B.Zh. Manapbaev, D.N. Delikesheva, D.R. Korgasbekov</b>	
STUDYING THE EFFECT OF REINFORCEMENT ON THE PROPERTIES OF PLUGGING MATERIALS WITH EXPANDING ADDITIVES.....	108
<b>Y.M. Kalybekova, A.K. Zauirbek, N.N. Balgabayev, T.S. Ishangalyev, Y.K. Auelbek, A.V. Cravchuk</b>	
IMPROVEMENT OF THE WATER DISTRIBUTION MANAGEMENT SCHEME ON IRRIGATION SYSTEMS USING HYDROLOGICAL INFORMATION.....	118
<b>N.Zh. Karsakova, K.T. Sherov, B.N. Absadykov, M.R. Sikhimbayev, G.M. Tussupbekova</b>	
THE ISSUES OF IMPROVING THE TECHNOLOGY FOR MACHINING THE LARGE DIAMETER HOLES OF THE LARGE-SCALE PARTS OF THE TECHNOLOGICAL EQUIPMENT.....	126
<b>R.A. Kozbagarov, M.S. Zhiyenkozhayev, N.S. Kamzanov<sup>3</sup>, S.G. Tsygankov, A.S. Baikenzheyeva</b>	
DESIGN OF HYDRAULIC EXCAVATOR WORKING MEMBERS FOR DEVELOPMENT OF MUDSLIDES..	134
<b>E.I. Kuldeyev, M.B. Nurpeissova, Z.A. Yestemesov, A.A. Ashimova, A.V. Barvinov</b>	
OBTAINING AGLOPORITE FROM ASH OF EKIBASTUZ COAL SELECTED FROM ASH DUMP OF CRPP-3 OF ALMATY CITY.....	142

<b>A.S. Madibekov, L.T. Ismukhanova, A.O. Zhadi, B.M. Sultanbekova, E.D. Zhaparkulova</b> MICROPLASTICS IN THE AQUATIC ENVIRONMENT: OVERVIEW OF THE PROBLEM AND CURRENT RESEARCH AREAS.....	149
<b>Y.G. Neshina, A.D. Mekhtiyev, V.V. Yugay, A.D. Alkina, P.Sh. Madi</b> DEVELOPING A SENSOR FOR CONTROLLING THE PIT WALL DISPLACEMENT.....	160
<b>M.B. Nurpeissova, Z.A. Yestemesov, A.A. Bek, V.S. Kim, G.K. Syndyrbekova</b> MAIN CHARACTERISTICS OF FLY ASH FROM EKIBASTUZ SRPP-2.....	168
<b>N.D. Spatayev, G.S. Sattarova, A.D. Nurgaliyeva, L. Kh. Balabas, F.K. Batessova</b> ENSURING HEALTHY AND SAFE WORKING CONDITIONS IN BREAKAGE FACE WITH DIRECT-FLOW VENTILATION SCHEME.....	177
<b>V.M. Shevko, A.M. Nurpeissova, D.K. Aitkylov, A.A. Joldassov</b> THERMODYNAMIC PREDICTION AND EXPERIMENTAL PRODUCTION OF SILICON ALLOYS FROM TAILINGS LEACHING OF OXIDIZED COPPER ORE ALMALY.....	188

## **Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>, that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE, and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct ([http://publicationethics.org/files/u2/New\\_Code.pdf](http://publicationethics.org/files/u2/New_Code.pdf)). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

**[www.nauka-nanrk.kz](http://www.nauka-nanrk.kz)**

**<http://www.geolog-technical.kz/index.php/en/>**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Заместитель директора отдела издания научных журналов НАН РК Р. Жәлиқызы

Редакторы: М.С. Ахметова, Д.С. Аленов

Верстка на компьютере Г.Д. Жадыранова

Подписано в печать 14.04.2023.

Формат 70x90<sup>1/16</sup>. Бумага офсетная. Печать – ризограф.  
20,0 п.л. Тираж 300. Заказ 1.