

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN

ГЕОЛОГИЯ ЖӘНЕ ТЕХНИКАЛЫҚ ҒЫЛЫМДАР
СЕРИЯСЫ



СЕРИЯ
ГЕОЛОГИИ И ТЕХНИЧЕСКИХ НАУК



SERIES
OF GEOLOGY AND TECHNICAL SCIENCES

3 (423)

МАМЫР – МАУСЫМ 2017 ж.
МАЙ – ИЮНЬ 2017 г.
MAY – JUNE 2017

ЖУРНАЛ 1940 ЖЫЛДАН ШЫҒА БАСТАҒАН
ЖУРНАЛ ИЗДАЕТСЯ С 1940 г.
THE JOURNAL WAS FOUNDED IN 1940.

ЖЫЛЫНА 6 РЕТ ШЫҒАДЫ
ВЫХОДИТ 6 РАЗ В ГОД
PUBLISHED 6 TIMES A YEAR

АЛМАТЫ, ҚР ҰҒА
АЛМАТЫ, НАН РК
ALMATY, NAS RK

Б а с р е д а к т о р ы

э. ғ. д., профессор, ҚР ҰҒА корреспондент-мүшесі

И.К. Бейсембетов

Бас редакторының орынбасары

Жолтаев Г.Ж. проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., корр.-мүшесі (Қазақстан)
Алиев Т. проф., академик (Әзірбайжан)
Бакиров А.Б. проф., (Қырғыстан)
Беспәев Х.А. проф. (Қазақстан)
Бишимбаев В.К. проф., академик (Қазақстан)
Буктуков Н.С. проф., корр.-мүшесі (Қазақстан)
Бұлат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Ерғалиев Г.Х. проф., академик (Қазақстан)
Жуков Н.М. проф. (Қазақстан)
Кенжалиев Б.К. проф. (Қазақстан)
Қожахметов С.М. проф., академик (Қазақстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., корр.-мүшесі (Қазақстан)
Мұхамеджанов М.А. проф., корр.-мүшесі (Қазақстан)
Нигматова С.А. проф. (Қазақстан)
Оздоев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Қазақстан)
Сейтов Н.С. проф., корр.-мүшесі (Қазақстан)
Сейтмуратова Э.Ю. проф., корр.-мүшесі (Қазақстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (АҚШ)
Штейнер М. проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология мен техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде 30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18, <http://nauka-nanrk.kz/geology-technical.kz>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2017

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыра көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р

д. э. н., профессор, член-корреспондент НАН РК

И. К. Бейсембетов

Заместитель главного редактора

Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Р е д а к ц и о н н а я к о л л е г и я:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., чл.-корр. (Казахстан)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Беспаяев Х.А. проф. (Казахстан)
Бишимбаев В.К. проф., академик (Казахстан)
Буктуков Н.С. проф., чл.-корр. (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Ергалиев Г.Х. проф., академик (Казахстан)
Жуков Н.М. проф. (Казахстан)
Кенжалиев Б.К. проф. (Казахстан)
Кожаметов С.М. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., чл.-корр. (Казахстан)
Мухамеджанов М.А. проф., чл.-корр. (Казахстан)
Нигматова С.А. проф. (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Казахстан)
Сейтов Н.С. проф., чл.-корр. (Казахстан)
Сейтмуратова Э.Ю. проф., чл.-корр. (Казахстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (США)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год

Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,

<http://наука-нанрк.kz/geology-technical.kz>

© Национальная академия наук Республики Казахстан, 2017

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

E d i t o r i n c h i e f

doctor of Economics, professor, corresponding member of NAS RK

I. K. Beisembetov

Deputy editor in chief

Zholtayev G.Zh. prof., dr. geol-min. sc.

E d i t o r i a l b o a r d:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., corr. member. (Kazakhstan)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Bespayev Kh.A. prof. (Kazakhstan)
Bishimbayev V.K. prof., academician (Kazakhstan)
Buktukov N.S. prof., corr. member. (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadjikistan)
Gravis R.M. prof. (USA)
Yergaliev G.Kh. prof., academician (Kazakhstan)
Zhukov N.M. prof. (Kazakhstan)
Kenzhaliyev B.K. prof. (Kazakhstan)
Kozhakhmetov S.M. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., corr. member. (Kazakhstan)
Muhamedzhanov M.A. prof., corr. member. (Kazakhstan)
Nigmatova S.A. prof. (Kazakhstan)
Ozdoyev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Rakishev B.R. prof., academician (Kazakhstan)
Seitov N.S. prof., corr. member. (Kazakhstan)
Seitmuratova Ye.U. prof., corr. member. (Kazakhstan)
Stepanets V.G. prof., (Germany)
Humphery G.D. prof. (USA)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://nauka-nanrk.kz/geology-technical.kz>

© National Academy of Sciences of the Republic of Kazakhstan, 2017

Editorial address: Institute of Geological Sciences named after K.I. Satpayev
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 3, Number 423 (2017), 236 – 240

UDC 677.024

A. E. Aripbayeva¹, Zh. U. Mirkhalikov¹, Sh. Shapalov¹, A. Sh. Suigenbaeva¹,
Kh. K. Kuspangalieva², K. K. Yerniyazova², M. Zh. Makhambetov²,
A. M. Uteshkalieva², A. K. Sakparova², G. Takibaeva¹

¹M. Auezov South Kazakhstan State University, Shymkent, Kazakhstan,

²Kh. Dosmuhamedov Atyrau State University, Kazakhstan.

E-mail: akerke-1982@mail.ru

WAYS FOR IMPROVEMENT OF STRENGTH CHARACTERISTICS OF A FIRE PRESSURE HOSE

Abstract. A fire hose is a pipeline for transportation of fire extinguishing agents, equipped by special joints. One of the key qualities of a fire hose is flexibility. Therefore fire hoses are made from a special fabric, consisting of natural or synthetic fibers. Pressure hoses with reinforcing frame from synthetic fibers have some design options such as rubberized fire pressure hoses, latex fire pressure hoses, with differential coating, meant for pressure in 3,0MPa. On the exterior, for protection from negative factors and damages, the hose may be equipped by a rubber coating. The fire pressure hoses are one of the main types of fire-extinguishing equipment and successful and fast fire extinguishing to a large extent depends on their accuracy. Our paper shows results of investigations on possibility to improve strength indexes of the fire pressure hoses by means of double rubberizing of the hoses made from synthetic fibers. We developed a special formulation of the rubber compound, allowing work out strength characteristics of the fire pressure hoses. The fabric hose rubberizing will also allow to protect the fire pressure hose from harmful environmental load and extend service life of the product.

Key words: fire hose, pressure hose, reinforcing frame, natural and synthetic fibers, rubber layer, hydraulic pressure.

Introduction. A fire hose is a pipeline for transportation of fire extinguishing agents, equipped by special joints. One of the key qualities of a fire hose is flexibility. Therefore fire hoses are made from a special fabric, consisting of natural or synthetic fibers. Pressure hoses from natural fibers have limited application [1]. Dry clean linen hoses are comparatively light, and their rolls are compact. When supplying water through such hoses, the exterior surface of the case fabric is wetted owing to water percolation through the case walls (percolation). That rises thermal resistance of the linen hoses in conditions of fires. However, high tendency of the linen hoses to sour processes, heavy hydraulic losses, as well as complex exploitation in conditions of low temperatures limit area of their application on mobile fire-extinguishing means [2, 3]. Pressure hoses with reinforcing frame from synthetic fibers have some design options such as rubberized fire pressure hoses, latex fire pressure hoses, with differential coating, meant for pressure in 3,0MPa [4]. On the exterior, for protection from negative factors and damages, the hose may be equipped by a rubber coating [5]. The fire pressure hoses are one of the main types of fire-extinguishing equipment and successful and fast fire extinguishing to a large extent depends on their accuracy.

The primary bearing element of the fire pressure hoses is the reinforcing frame, represented by woven pressure shell. The woven reinforcing frame fully takes forces, conditioned by availability of liquid pressure inside the fire hose.

Experimental part. Analysis of woven reinforcing frames' structure of the used fire hoses showed that they are single-texture cross-woven fabrics in most cases. At that core threads, which interweave with weft threads, laid in a circle of the fire pressure hoses, are arranged along the length of the fire pressure hoses. Therefore, calculation of the fire pressure hoses strength generally comes to calculation of strength

of their woven reinforcing frame. The main strength index of the fire pressure hoses at the action of internal hydraulic pressure of its liquid for fire extinguishing is disruptive pressure, at which the fire hose breaks. The disruptive pressure values for all kinds of the fire pressure hoses are regulated by appropriate the State of Standards.

Our paper shows results of investigations on possibility to improve strength indexes of the fire pressure hoses by means of double rubberizing of the hoses made from synthetic fibers. As stated above the natural fibers, particularly lint, have a number of engineering deficiencies, therefore we used the pressure hoses with the reinforcing frame from synthetic fibers. Furthermore, the fabric frame from the synthetic fibers has good adhesion to the rubber compound. We developed a special formulation of the rubber compound, allowing to work out strength characteristics of the fire pressure hoses. The rubber compound formulation has been developed on the basis of SKI-3 rubber with good elasticity and giving high flexibility to the pressure hoses. The formulation also includes sulfur, polysulfur, the curing agents and together with zinc white and stearic acid compose the cure system. The cure system in the curing process gives high strength and elasticity to the rubber. Such components as sulfonamide M, acetone anil R, diaphene FP and Phthalic anhydride are anti-ageing agents and protect the rubber and fabric frame against destructive effect of sun rays, atmospheric oxygen, ozone and heat. ZVI wax migrating to the surface of product when storing, also protects from environmental hazards. Such ingredients as octophor NN and hydrocarbon resins are plasticizing agents, which improve processing properties of the rubber compound and allow to enter the rubber compound between fibers and even inside the fibers, hence improving the bonding strength between fabric of the frame and rubber, as well as between fibers of the pressure hose. PN-6Sh oil is a plasticizer which increases plasticity of the compound and assists to the equilibrium distribution of the components in the rubber improving quality of the rubber coating. Zeolite is a mineral extender which increases fire-resisting property and thermal endurance of the rubber coating. Technical carbon P 245 extender improves rubber strength [6, 7].

Result and its discussion. The rubber compound formulation is shown in Table 1.

Table 1 – The rubber compound formulation for rubberizing of the fabric hoses' frames

Item	Mass fraction per 100 mass fractions of the rubber
SKI-3	100
Sulfur	1,6-0
Polysulfur	0-1,3
Sulfonamide M	1,4
Phthalic anhydride	0,3
Zinc white	2,5
Stearic acid	2,0
Acetone anil R	1,2
Octophor NN	2,0
Hydrocarbon resins	4,0
ZVI wax	1,0
PN-6Sh oil	4,0
Diaphene FP	1,5
Technical carbon P 245	30,0
Zeolite	20,0


The rubber compound mixing was carried out in two stages. The temperature conditions met technical regulations. The vulcanizing of the samples was carried out at a temperature of 155°C during 15 minutes. The ageing test was carried out in autoclave at a temperature of 393 K in flocculent environment, at a pressure of 0,2MPa during 40 hours, and in similar conditions at constant irrigation by 5% NaCl water during 8 hours. Results of physical and mechanical tests of the developed rubber compound are shown in Table 2.

Table 2 – Physical and mechanical properties of the rubbers for rubberizing of the fire pressure hoses

Item	Indexes
Modulus at 300%, MPa	10,1
Nominal shearing strength, MPa	21,1
Elongation at break, %	525
Tear resistance, kN/m	63
Resistance to repeated tension at elongation 200%, thousand cycles	6,1
Bonding strength by N-method, N	443

It is seen from the data of Table 2 that the developed rubber compound has high strength properties that will allow to increase strength of the fire pressure hoses at the action of internal hydraulic pressure of its liquid. The fabric hose rubberizing will also allow to protect the fire pressure hose from harmful environmental load and extend service life of the product.

Further, we carried out experiments for determination of optimal thickness of rubber coating layer at the rubberizing of the fire pressure hose [8-10].

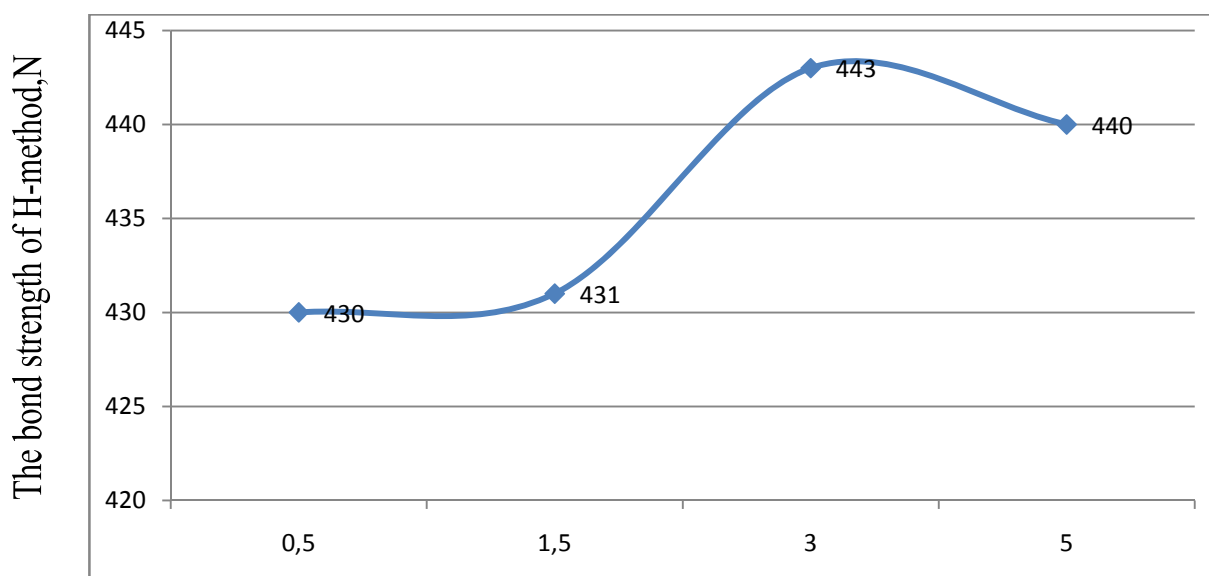

Influence of the rubber layer coating thickness at the rubberizing of the hose on the bonding strength of the fire pressure hose fibers

As it is seen from Figure by the results of experimental data, considerable increase in the strength properties and bonding strength between the rubber and fabric hose at the coating thickness of 3 mm is observed.

The following technical characteristics, Table 3, were defined after the tests of the rubberized hose.

Table 3 – Technical characteristics of the fire pressure hoses

№	Technical characteristics	Thickness of the rubber layer, mm		
		1,5	3	5
1	Diameter nominal (DN)* of suction and delivery-suction hose	100	100	100
2	Minimal bend radius, mm	400	600	500
3	Working pressure of delivery-suction hoses, MPa (kg/cm ²)	About 1,0 (10,0)		
4	Vacuum gauge pressure, MPa (kg/cm ²)	Approximately 0,08 (0,8)		
5	Working environment for suction and delivery-suction hoses of "B" class	Technical water, water (weak) solutions of inorganic acids and alkali by concentration to 20%		

Conclusion. When using the rubber compound for the rubberizing of the hoses, encapsulation of each fiber by the rubber compound occurs. That results in increase of bonds between the fibers and improvement of strength of the fire pressure hoses at the action of internal hydraulic pressure.

The external rubber layers protect the hose from negative factors and damages. Such rubber layer gives the hose necessary flexibility and keeps the strength. The tests showed that such pressure hose meets the requirements of GOST 51049–97 “Fire engineering. Fire pressure hoses. General technical requirements. Test methods” and fire code 152–2000 “Fire engineering. Fire pressure hoses. Technical fire safety regulations. Test methods”.

Finance. Source of funding research – M. Auezov South Kazakhstan State University.

REFERENCES

- [1] Stepanov S.G. The development of the theory of the formation and structure of the tissue on the basis of nonlinear mechanics of flexible filaments. Dissertation of Doctor of Technical Sciences. Ivanovo. IGTA. 2007. 443 p. (in Rus.).
- [2] Motorin D.V., Stepanov O.S., Bratolyubova E.V. *Izv. Vyssh. Uchebn. Zaved. Tech. Tex. Prom.* 2010. N 8. P. 103-109 (in Rus.).
- [3] Motorin L.V. A simplified mathematical model for strength calculation of pressure fire hoses in hydraulic impact / L.V. Motorin, A. Stepanov, E. Bratolyubova // *Math. universities. The technology of the textile industry.* 2011. N 1. P. 126-133.
- [4] Aripbaeva A.E. Method of calculation and rational design of reinforcement carcasses of pressure fire hoses with synthetic filaments [Text] / A.E. Aripbaeva, Zh.U. Myrhalikov, O.I. Koifman, Y.M. Bazarov S.G. Stepanov // *Math. Universities. Chemicals & Chem. tehnologiya.* 2016. T. 59. Vol. 10. P. 83-87.
- [5] Aripbaeva A.E. Methods of rational design of woven reinforcing skeletons pressure fire hoses / A.E. Aripbaeva Myrhalikov Zh.U. Stepanov S.G. // *Coll. materials XIX International Scientific and Technical Forum "Physics of fibrous materials: structure, properties, high technologies and materials» (SMARTEX - 2016).* P. 235-237.
- [6] Koshelev F.F., Kornev A.E., Bukanov A.M. *General chemical technology of rubber.* M.: Chemistry, 1999. 527 p.
- [7] *Chemical encyclopedia: in 5 vol. / Editorial Board.: N. S. Zefirov (ed.). M.: Soviet encyclopedia, 1995. Vol. 4. P. 319. 639 p.*
- [8] Tarasov-Agalakov N.A. *Practical hydraulics in fire business.* M., 1959. 134 p. (in Rus.).
- [9] Deaconov E.G., Nikolaev I.K. *Journal of Computational Mathematics and Mathematical Physics.* 1973. N 4. Vol. 13. P. 938-951 (in Rus.).
- [10] Bukhin B.L. Application of the theory of mesh membranes to the calculation of pneumatic tires. The mechanics of pneumatic tires. *Sbor. tr. NII Shinnoy Prom. M., 1974. P. 59-74 (in Rus.).*

**А. Е. Арипбаева¹, Ж. У. Мырхалыков¹, Ш. Шапалов¹, А. Ж. Суйгенбаева¹,
Х. К. Куспангалиева², К. К. Ерниязова², М. Ж. Махамбетов²,
А. М. Утешкалиева², А. К. Сакпарова², Г. А. Такибаева¹**

¹Южно-Казахстанский государственный университет им. М. Ауезова, Шымкент, Казахстан,

²Атырауский государственный университет им. Х. Досмухамедова, Казахстан

ПУТИ ПОВЫШЕНИЯ ПРОЧНОСТНЫХ ХАРАКТЕРИСТИК ПОЖАРНОГО НАПОРНОГО РУКАВА

Аннотация. Пожарный рукав это трубопровод для транспортирования огнетушащих средств, оснащенный специальными соединениями. Одно из основных качеств пожарного рукава – гибкость. Поэтому пожарные рукава изготавливаются из специальной ткани, состоящих из натуральных или синтетических волокон. Напорные рукава с армирующим каркасом из синтетических волокон имеют несколько вариантов конструктивного исполнения: прорезиненные напорные пожарные рукава, латексированные напорные пожарные рукава, с двусторонним покрытием, рассчитанные на давление 3,0 МПа. Снаружи для защиты от негативных факторов и повреждений рукав может быть оснащен резиновым покрытием. В работе показаны результаты исследований по возможности увеличения прочностных показателей пожарных напорных рукавов посредством двойного обрешивания рукавов, изготовленных из синтетических волокон. При использовании резиновой смеси для обрешивания рукавов происходит обволакивание резиновой смесью каждого волокна, что приводит к повышению связей между волокнами, тем самым повышая прочность ПНР при действии внутреннего гидравлического давления. Слой резины, находясь снаружи, защищает рукав от негативных факторов и повреждений. Такой слой резины придает рукаву нужную гибкость и сохраняет прочность. Проведенные испытания показали, что данный напорный рукав соответствует требованиям.

Ключевые слова: пожарный рукав, напорный рукав, армирующий каркас, натуральные и синтетические волокна, резиновый слой, гидравлическое давление.

А. Е. Арипбаева¹, Ж. У. Мырхалыков¹, Ш. Шапалов¹, А. Ж. Суйгенбаева¹,
Х. К. Қуспанғалиева², К. К. Ерняязова², М. Ж. Махамбетов²,
А. М. Утешкалиева², А. К. Сакпарова², Г. А. Такибаева¹

¹М. Әуезов атындағы Оңтүстік Қазақстан мемлекеттік университеті, Шымкент, Қазақстан

²Х. Досмұхамедов атындағы Атырау мемлекеттік университеті, Қазақстан

АРЫНДЫ ӨРТ ТҮТІКТІН БЕРІКТІК СИПАТТАМАЛАРЫН АРТТЫРУ ЖОЛДАРЫ

Аннотация. Өрт сөндіру түтігі бұл – өрт сөндіргіш құралдарды тасымалдау үшін арнайы қоспаларымен жабдықталған құбыр. Өрт сөндіру түтігінің негізгі бір қасиеті – икемділік. Сондықтан өрт сөндіру түтігі табиғи немесе синтетикалық талшықтардан тұратын арнайы матадан жасалады. Қысымды түтік синтетикалық талшықтардан тұратын армирлерген қаңқасы бар бірнеше конструктивті орындаудан тұрады: резеңкеленген арынды өрт сөндіру түтігі, латекстелген арынды өрт сөндіру түтігі, екі жақты жабыны бар, және 3,0 МПа қысымға есептелген. Жағымсыз факторлардан және зақымданудан қорғау үшін түтік сыртынан резеңке жабыны жабдықталған болуы мүмкін. Осы жұмыста өрт сөндіру түтіктерінің қысымға беріктік көрсеткіштерін ұлғайту мақсатында синтетикалық талшықтардан жасалған түтікті қос резеңкелендіру нәтижелері бойынша зерттеулер дайындалған. Резеңке қоспасын пайдалану кезінде түтікті резеңкелендіру үшін, әрбір талшықты резеңке қоспасымен талшықтандыру жүреді, бұл талшықтар арасындағы байланыстарды арттыруға әкеледі, осылайша ішкі гидравликалық қысым әрекеті кезінде ПНР беріктігін арттырады. Резеңке қабаты сыртында тұрып түтікті теріс факторлардан және зақымданудан қорғайды. Осындай резеңке қабаты түтікке қажетті икемділік береді және беріктігін сақтайды. Жүргізілген сынақтар көрсеткендей, бұл қысым түтігі талаптарға сәйкес келеді.

Түйін сөздер: өрт сөндіру түтігі, қысым түтігі, армирлерген қаңқасы, табиғи және синтетикалық талшықтар, резеңке қабаты, гидравликалық қысым.

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/e4ditors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www.nauka-nanrk.kz

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://geolog-technical.kz/index.php/kz/>

Верстка Д. Н. Калкабековой

Подписано в печать 06.06.2017.

Формат 70x881/8. Бумага офсетная. Печать – ризограф.

18,9 п.л. Тираж 300. Заказ 3.