

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Қ. И. Сәтпаев атындағы Қазақ ұлттық техникалық зерттеу университеті

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Казакский национальный исследовательский
технический университет им. К. И. Сатпаева

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Kazakh national research technical university
named after K. I. Satpayev

ГЕОЛОГИЯ ЖӘНЕ ТЕХНИКАЛЫҚ ҒЫЛЫМДАР СЕРИЯСЫ



СЕРИЯ ГЕОЛОГИИ И ТЕХНИЧЕСКИХ НАУК



SERIES OF GEOLOGY AND TECHNICAL SCIENCES

2 (428)

НАУРЫЗ – СӘУІР 2018 ж.
МАРТ – АПРЕЛЬ 2018 г.
MARCH – APRIL 2018

ЖУРНАЛ 1940 ЖЫЛДАН ШЫҒА БАСТАҒАН
ЖУРНАЛ ИЗДАЕТСЯ С 1940 г.
THE JOURNAL WAS FOUNDED IN 1940.

ЖЫЛЫНА 6 РЕТ ШЫҒАДЫ
ВЫХОДИТ 6 РАЗ В ГОД
PUBLISHED 6 TIMES A YEAR

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Б а с р е д а к т о р ы
э. ғ. д., профессор, ҚР ҰҒА академигі

И.К. Бейсембетов

Бас редакторының орынбасары

Жолтаев Г.Ж. проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., академик (Қазақстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Әзірбайжан)
Бакиров А.Б. проф., (Қырғыстан)
Беспәев Х.А. проф. (Қазақстан)
Бишимбаев В.К. проф., академик (Қазақстан)
Буктуков Н.С. проф., академик (Қазақстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Ерғалиев Г.К. проф., академик (Қазақстан)
Жуков Н.М. проф. (Қазақстан)
Кенжалиев Б.К. проф. (Қазақстан)
Қожахметов С.М. проф., академик (Қазақстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., академик (Қазақстан)
Мұхамеджанов М.А. проф., корр.-мүшесі (Қазақстан)
Нигматова С.А. проф. (Қазақстан)
Оздоев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Қазақстан)
Сейтов Н.С. проф., корр.-мүшесі (Қазақстан)
Сейтмуратова Э.Ю. проф., корр.-мүшесі (Қазақстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (АҚШ)
Штейнер М. проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология мен техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде
30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
<http://nauka-nanrk.kz/geology-technical.kz>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2018

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыра көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р
д. э. н., профессор, академик НАН РК

И. К. Бейсембетов

Заместитель главного редактора

Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Р е д а к ц и о н н а я к о л л е г и я:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., академик (Казахстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Беспаяев Х.А. проф. (Казахстан)
Бишимбаев В.К. проф., академик (Казахстан)
Буктуков Н.С. проф., академик (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Ергалиев Г.К. проф., академик (Казахстан)
Жуков Н.М. проф. (Казахстан)
Кенжалиев Б.К. проф. (Казахстан)
Кожаметов С.М. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., академик (Казахстан)
Мухамеджанов М.А. проф., чл.-корр. (Казахстан)
Нигматова С.А. проф. (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Казахстан)
Сейтов Н.С. проф., чл.-корр. (Казахстан)
Сейтмуратова Э.Ю. проф., чл.-корр. (Казахстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (США)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год

Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://nauka-nanrk.kz/geology-technical.kz>

© Национальная академия наук Республики Казахстан, 2018

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

Editor in chief

doctor of Economics, professor, academician of NAS RK

I. K. Beisembetov

Deputy editor in chief

Zholtayev G.Zh. prof., dr. geol-min. sc.

Editorial board:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., academician (Kazakhstan)
Agabekov V.Ye. academician (Belarus)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Bespayev Kh.A. prof. (Kazakhstan)
Bishimbayev V.K. prof., academician (Kazakhstan)
Buktukov N.S. prof., academician (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadjikistan)
Gravis R.M. prof. (USA)
Yergaliev G.K. prof., academician (Kazakhstan)
Zhukov N.M. prof. (Kazakhstan)
Kenzhaliyev B.K. prof. (Kazakhstan)
Kozhakhmetov S.M. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., academician (Kazakhstan)
Muhamedzhanov M.A. prof., corr. member. (Kazakhstan)
Nigmatova S.A. prof. (Kazakhstan)
Ozdoev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Rakishev B.R. prof., academician (Kazakhstan)
Seitov N.S. prof., corr. member. (Kazakhstan)
Seitmuratova Ye.U. prof., corr. member. (Kazakhstan)
Stepanets V.G. prof., (Germany)
Humphery G.D. prof. (USA)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://nauka-nanrk.kz/geology-technical.kz>

© National Academy of Sciences of the Republic of Kazakhstan, 2018

Editorial address: Institute of Geological Sciences named after K.I. Satpayev
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 2, Number 428 (2018), 118 – 124

UDC 536: 539.19

A. S. Muratov, G. E. Sakhmetova, L. T. Tashimov, A. M. Brener

M. Auezov South-Kazakhstan State University, Shymkent, Kazakhstan.

E-mail: asm_59@mail.ru, 17-07-70@mail.ru, tashimov.l@mail.ru, amb_52@mail.ru

**SCALE-UP UNDER CALCULATING A WORKING ZONE
OF CHEMICAL APPARATUSES WITH ACCOUNTING
TO THE DISTRIBUTION OF PHASES**

Abstract. In this work, the new approach to modelling the scale factor under the calculation of an efficiency of mass transfer in the reactors has been submitted. The approach is based on the dividing the apparatus work volume into zones with different ratios between interacting phases streams. The expressions obtained can be applied to the design of chemical reactors with allowance for the scaling phenomena.

Keywords: scale-up, chemical apparatus, packing, degree of conversion, mass transfer.

Introduction. Numerous experimental studies and experience of industrial exploitation show that when calculating devices of large unit capacity from experimental data obtained from small-scale experimental installations, it is primarily to ensure the calculated efficiency of their operation. It is established that this efficiency tends to decrease with an increase in the sizes of the apparatus [1, 2]. This phenomenon has been called the scale effect and has recently become the subject of research by many scientists [1-3].

The presence of stagnant zones, recirculation sites and areas with a complex hydrodynamical structure in the apparatus volume creates major problems in the development of mathematical models. However, even a workable model is not always correctly used in the design of an industrial device due to the noted problem of a scale transition, since the structure of the streams can change with a change in the overall sizes of the apparatus and its power [4, 5].

This paper deals with an approach to this problem, based on some ideas proposed in [2], which makes it possible to give a fairly simple technique for estimating the influence of the scale factor on the mass transfer efficiency, suitable for use in engineering calculation methods.

The approach is based on the idea that the entire volume of the apparatus has divided into zones with different ratios of interacting flows. It is assumed that the structure of the streams in the isolated small volume cell of the reactor corresponds to the structure of flows in the laboratory apparatus with the same flux ratio and uniform phase distribution [2].

Mathematical model. In order to take into account the uneven distribution of flows, it is assumed that each volume element can be associated with the local value of the bulk mass transfer coefficient obtained on laboratory installations of small size with a known flow structure [6, 7].

The equations for the interaction of phases in elementary volumes are as follows:

$$\frac{\partial Y}{\partial z} = L(z, r) \frac{\partial X}{\partial z}; \quad (1)$$

$$\frac{\partial Y}{\partial z} = K_v(z, r) \frac{d\chi}{dV}, \quad (2)$$

where X, Y are the dimensionless concentrations of the reacting reagents; K_v – volumetric mass transfer coefficient; z – longitudinal coordinate; r – radial coordinate; χ – degree of conversion; V – volume of the reactor; L is the ratio of the fluxes of the interacting phases.

In the linear approximation, we can put:

$$\frac{d\chi}{dV} \approx k_{st} X - Y, \quad (3)$$

where k_{st} is the rate constant.

Then system (1), (2) can be reduced to the following

$$\begin{cases} \frac{\partial^2 Y}{\partial z^2} - D(z, r) \frac{\partial Y}{\partial z} = 0, \\ \frac{\partial^2 X}{\partial z^2} - \left[D(z, r) - \frac{\partial(\ln L)}{\partial z} \right] \frac{\partial X}{\partial z} = 0. \end{cases} \quad (4)$$

The effective diffusion coefficient reads [4]:

$$D(z, r) = \frac{\partial(\ln K_v)}{\partial z} + K_v(\lambda - 1), \quad (5)$$

where λ is the mass transfer factor [2]:

$$\lambda = k_{st} L \quad (6)$$

Since the average value λ does not depend on the distribution of fluxes and the one is constant along the length of the reactor, the average value of the mass transfer coefficients can be calculated from the formula:

$$\bar{K}_v = \frac{1}{f} \iint_f K_v(L) df \quad (7)$$

After some rearrangements, we obtain the equation of the process line of the mass transfer in the apparatus

$$Y = Y_0 \frac{1}{\lambda - 1} \left[(1 - \lambda\chi) \exp\left(\frac{\lambda - 1}{J_Y} f \int_0^z \bar{K}_v ds\right) - \lambda(1 - \chi) \right] + X_0 \frac{k_{st}}{\lambda - 1} \left[1 - \exp\left(\frac{\lambda - 1}{J_Y} f \int_0^z \bar{K}_v ds\right) \right] \quad (8)$$

The formula for calculating the degree of conversion of substances in the reactor when there are n successive sections in the apparatus with different phase flow structures can be derived as follows:

$$\chi = \frac{\exp\left(\frac{\lambda - 1}{J_Y} f \sum_{i=1}^n \int_0^{H_i} \bar{K}_{v(i)} ds\right) - 1}{\lambda \exp\left(\frac{\lambda - 1}{J_Y} f \sum_{i=1}^n \int_0^{H_i} \bar{K}_{v(i)} ds\right) - 1} \left(1 - \frac{k_{st} X_0}{Y_0} \right). \quad (9)$$

An analysis of the mathematical model for the distribution of the dispersed liquid phase in the reactor shows [4, 5] that there is a certain characteristic radius R_s at which the average intensity of the liquid flow is stabilized, and this radius is set at a certain distance H_s from the reactor inlet cross-section.

The following estimates are obtained for the indicated radius and average intensity:

$$R_s = \sqrt{\frac{aD}{2} \ln\left(\frac{4D}{\pi a}\right)}, \quad (10)$$

$$\bar{j} = J \sqrt{\frac{2h}{H_s}} \exp\left(-\frac{hR_s^2}{2a^2H_s}\right). \quad (11)$$

Thus, in carrying out the estimated calculations, the entire volume of the apparatus can be conditionally divided into two zones: a zone of stabilization in height H_s , within which the region of intensive mass transfer occupies only a certain part of the volume of the working zone of the apparatus, and a zone of steady-state mass transfer in which the local mass-transfer coefficients reach, on average, optimal values in the entire volume of the reactor.

In this case, in the first zone the so-called mass transfer loss coefficient γ , equal to the ratio of the mass-transfer coefficient in this zone to the optimal one according to experimental data [1, 2], can be introduced.

For the minimum local intensity of the flow of the disperse liquid phase, we obtain the estimate based on the stochastic walk model:

$$i_{\min} = \frac{4I \sqrt{\frac{a}{\pi d_0}}}{\exp\left(-\frac{d_0}{4a}\right)}. \quad (12)$$

Here, the initial distribution of the disperse phase has characterized by some conventional step between point sources of irrigation d_0 and a characteristic longitudinal size a of the reactor's elementary volume (for example, the size of the packing element) has been introduced.

The graph of the dependence on the ratio d_0/a of the minimum local flux density to the total initial irrigation density i_{\min}/I is shown in figure 1.

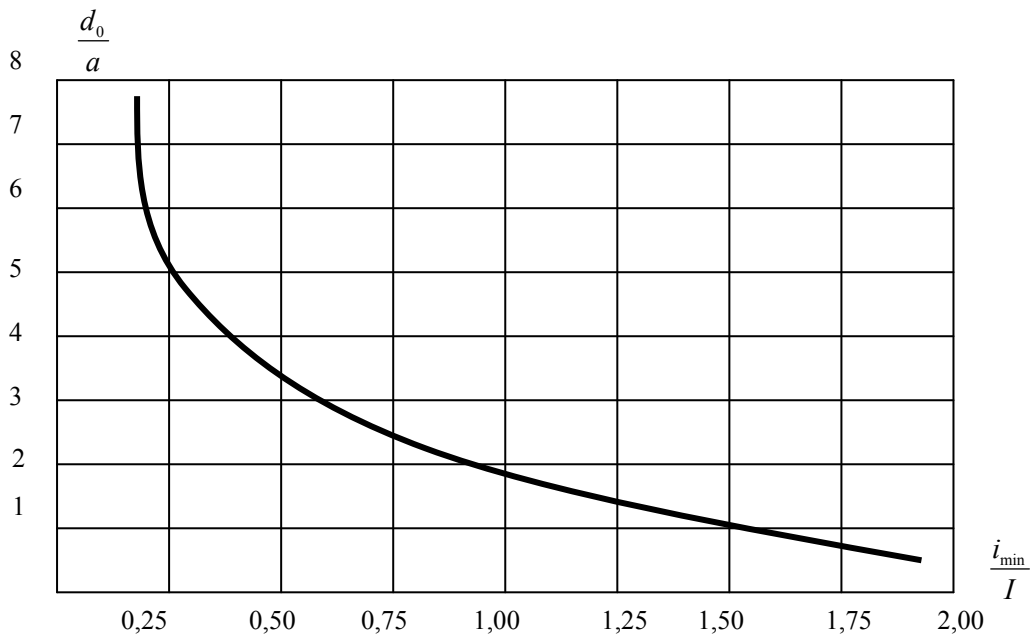


Figure 1 – Graph of solutions of equation (12)

Methods of calculation and discussion of the results. Based on the above models, the calculated ratios for the degree of conversion of substances in the reactor, taking into account the presence of zones in the reactor with a different distribution of phase flows in the zones have been obtained: for $\lambda \neq 1$:

$$\chi = \frac{\exp\left(\frac{\lambda-1}{G} F \bar{K} [H - (1-\gamma)] H_s\right) - 1}{\lambda \exp\left(\frac{\lambda-1}{G} F \bar{K} [H - (1-\gamma)] H_s\right) - 1}. \quad (13)$$

For $\lambda = 1$:

$$\chi = \frac{\frac{F}{G} \bar{K} [H - (1-\gamma)] H_s}{\frac{F}{G} \bar{K} [H - (1-\gamma)] H_s + 1}. \quad (14)$$

In ratios (13), (14), F is the total cross-section of the apparatus, G is the intensity of the flux of the continuous phase (gas).

If the idea of the height of the unit of mass transfer will be used to estimate the efficiency of the apparatus with accounting to the uneven distribution of flows in the volume [8, 9], then the calculation of the corresponding characteristic can be performed using the formulas

$$h = h^* + \Delta h, \quad (15)$$

$$\Delta h = \frac{(1-\gamma) H_s}{N}, \quad (16)$$

$$N = \frac{1}{\lambda-1} \ln\left(\frac{1-\chi}{1-\lambda\chi}\right), \quad (17)$$

where h^* is the height of the unit of transfer for a uniform distribution of fluxes (according to experimental studies on a laboratory bench).

Then it is possible to introduce the integral factor of the scale effect in the form:

$$\Phi = \frac{\lambda-1}{Q_g} F \sum_{i=1}^n \bar{K}_{g(i)} H_i \quad (18)$$

Factor (18) links the following physicochemical characteristics: (λ), mass-transfer indicators of intensity ($K_{g(i)}$), as well as scale indicators of the process, namely: geometric characteristics (F and H_i) and load value (Q_g).

Then the expression for calculating the total degree of absorption in the countercurrent of the contacting phases acquires a compact form:

$$\eta_{\downarrow} = \frac{\exp(\Phi) - 1}{\lambda \exp(\Phi) - 1} - \frac{\beta C_l^{(0)}}{C_g^{(0)}} \frac{\exp(\Phi) - 1}{\lambda \exp(\Phi) - 1} \quad (19)$$

And for concurrent flows the conversion degree reads:

$$\eta_{\uparrow} = -\frac{\exp(\Phi) - 1}{\lambda \exp(\Phi) - 1} + \frac{\beta C_l^{(0)}}{C_g^{(0)}} \frac{\exp(\Phi) - 1}{\lambda \exp(\Phi) - 1} \quad (20)$$

Figures 2 and 3 show some results of numerical experiments.

In accordance with the method described above and with the numerical experiment, the height of the calculated section in the packed column is related to the main geometric parameters of the packed column, namely: with the diameter of the column and the characteristic dimensions of the packing bodies, and also with the conventional number of irrigation points by the ratio [4]:

$$H_i / h = \frac{D^2}{a^2 \psi(k)}, \quad (21)$$

where

$$\psi(k) = \frac{4.64 + 1.76k}{(k + 1)^2} \tag{22}$$

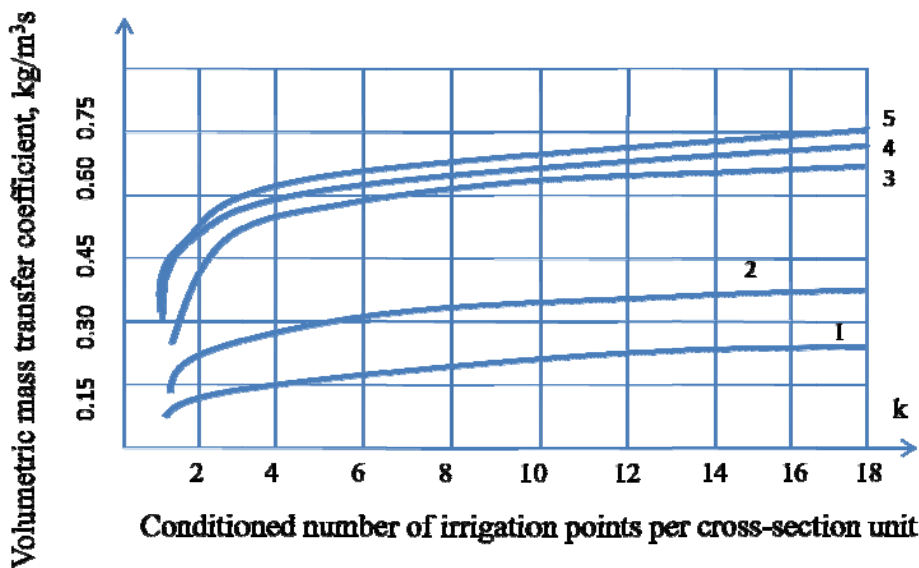


Figure 2 – The degree of extraction at three conditional parts of the column with changing along the height an average mass transfer coefficient. Countercurrent case. Countercurrent case. Irrigation densities, m/s: 1 – $0.5 \cdot 10^{-3}$; 2 – $1.25 \cdot 10^{-3}$; 3 – $2.0 \cdot 10^{-3}$; 4 – $2.75 \cdot 10^{-3}$; 5 – $3.5 \cdot 10^{-3}$

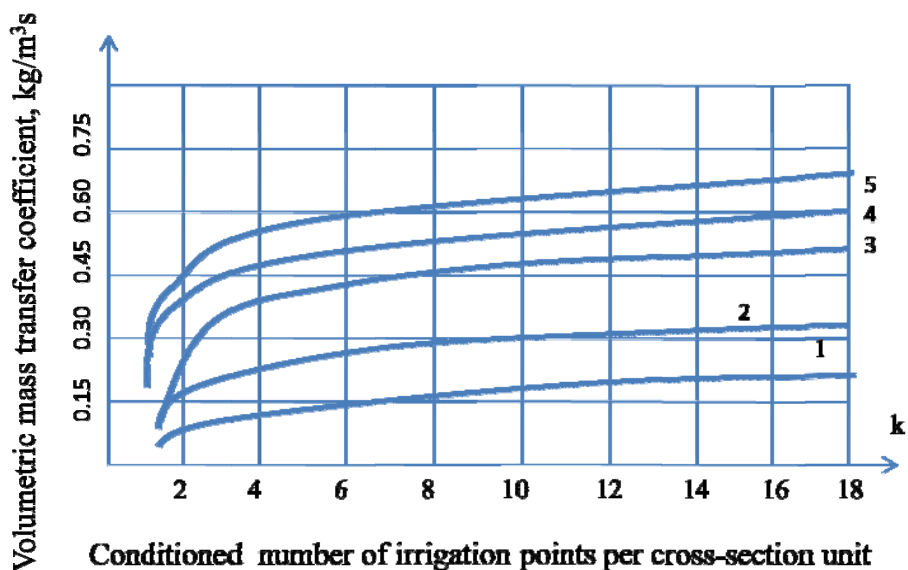


Figure 3 – The degree of extraction at three conditional parts of the column with changing along the height an average mass transfer coefficient. Concurrent case, m/s: 1 – $0.5 \cdot 10^{-3}$; 2 – $1.25 \cdot 10^{-3}$; 3 – $2.0 \cdot 10^{-3}$; 4 – $2.75 \cdot 10^{-3}$; 5 – $3.5 \cdot 10^{-3}$

From here, the inverse problem was solved, from which an expression for calculating the conditional number of irrigation points necessary for achieving uniform irrigation at a given height has been obtained:

$$k = \left(\frac{0.88}{\Gamma} - 1 \right) + \sqrt{\left(\frac{0.88}{\Gamma} - 1 \right)^2 + \frac{4.64}{\Gamma}}, \tag{23}$$

where Γ is the dimensionless complex geometric parameter of the packed column:

$$\Gamma = \frac{H_i a^2}{h D^2} \quad (24)$$

Further, according to the described method and dividing the height of the column into three conventional sections described, the change in the total conversion rate was calculated as a function of the integral factor (18). At the same time, the dependence of the degree of extraction on the regime parameter, namely, on the volume density of irrigation per unit cross-section of the apparatus (figures 2 and 3) was studied.

Figure 4 compares the results of the application of the developed scaling methodology to the calculation of the efficiency of the capture of ammonia and carbon dioxide (i.e., the important impurity biogas components) and experimental data obtained earlier in columns with chordal packing [4].

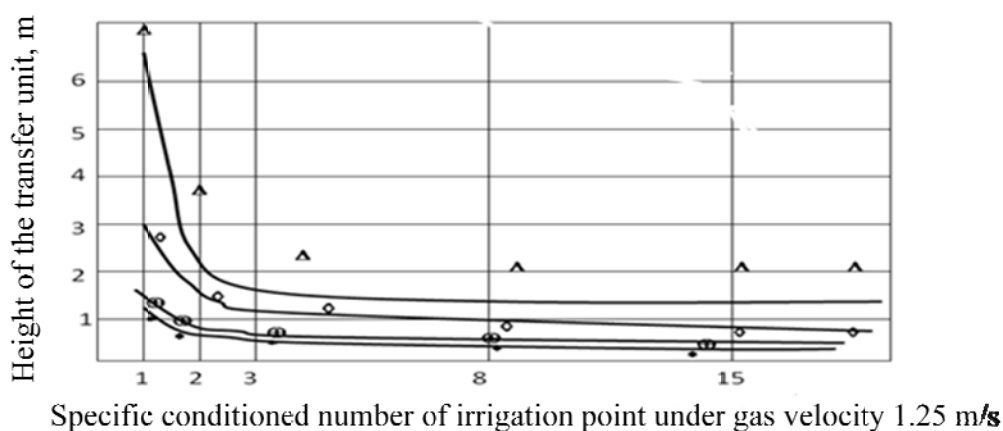


Figure 4 – Comparison of calculations for the model and generalized experimental data for the processes of ammonia capture by water and carbon dioxide capture by NaOH-H₂O system [4]. The average density of irrigation: Δ – 0.25 m²/h; \circ – 0.75 m²/h; \square – 1.25 m²/h. Solid lines – calculated values

The known experimental results [4] show that the effect of the uneven distribution of the liquid phase on the efficiency of the absorption process is very strong. This is especially true for higher irrigation densities and in the case of concurrent liquid and gas phases.

At the same time, at lower irrigation densities, an increase in the conditional number of irrigation points leads to decrease in irrigation densities in many areas of the column packed section. This phenomenon and the increase in the degree of uniformity of irrigation are two competing factors.

A numerical experiment shows that improving the uniformity of irrigation leads to an increase in the degree of conversion. This effect will be most pronounced in the case of highly soluble gases [9, 10]. In this case the contact surface of the phases plays a decisive role, and the influence of the integral factor of the scale effect manifests itself more sharply [2, 11, 12].

Conclusion. The main aspects of the problem of large-scale transition in the design of flowing chemical apparatus have been scientifically substantiated. It is shown that the nature of the scale effect in this case is of a complex nature, having both regime technological aspects and hydrodynamic causes.

The developed approach makes it possible to use the results of laboratory studies on small-sized installations and the relationships obtained by mathematical modeling of the distribution of phases in the volume of the apparatus and on their basis to calculate the industrial apparatus.

REFERENCES

- [1] Levenspiel. Chemical Reaction Engineering. John Wiley and Sons, 1999. 684 p. ISBN 0-471-25424-X
- [2] Sakhmetova G.E., Brener A.M., Balabekov O.S. Mathematical modelling of scale-up effect in wetted columns // Reports of National Academy of Science of the Kazkhstan Republic. Almaty. N 1. P. 62-67 (In Russian).
- [3] Reinhold G., Merrath S., Lennemenn F., Marcl H. Modelling the hydrodynamics and the liquid – mixing behavior of a biogas tower reactor // Chem. Engin. Sci. 1996. Vol. 51, N 17. P. 4065-4073.
- [4] Brener A.M. Adaptation of random walk methods to the modelling of liquid distribution in packed columns // Advances in Fluid Mechanics, IV. Southampton, Boston: WIT Press, 2002. P. 291-300. DOI 10.2495/AFM020261
- [5] Ghimire A., Frunzo L., Salzano E., Panico A., Esposito G., Lens P.N.L., Piozzi F. Biomass enrichment and scale-up Implications for dark fermentation hydrogen production with mixed cultures // Chemical Engineering Transactions. 2015. 43. P. 391-396.
- [6] Kreutzer M.T., Bakker J.J., Kapteijn F., Moulijn J.A., Verheijen P.J. Scaling-up multiphase monolith reactors: Linking residence time distribution and feed mal distribution // Industrial & Engineering Chemistry Research. 2005. 44(14). 4898-4913.
- [7] Tufvesson P., Fu W., Jensen J.S., Woodley J.M., Process considerations for the scale-up and implementation of biocatalysis // Food and Bioproducts Processing. 2010. 88(1). P. 3-11.
- [8] Brener A.M., Bolgov N.P., Sokolov N.M., Tarat E.Ya. Application of methods of grid statistics in describing liquid distribution on stacked shelf packing // Theor. Found. of Chem. Eng. 1981. 15(1). P. 62-67.
- [9] Nauman E.B. Chemical Reactor Design, Optimization, and Scale-up. John Wiley & Sons, New York, USA, 2008.
- [10] Sherwood T.K., Pigford R.L., Wilke C.R. Mass Transfer. McGraw-Hill Book Company. 1976. 677 p.
- [11] Zondervan E., Shan M., De Haan A. Optimal design of a reactive distillation column // Chemical Engineering Transactions. 2011. 24. P. 295-301.
- [12] Katsoulakis M.A., Vlachos D.G. Mesoscopic modeling of surface processes, Dispersive Transport Equations and Multiscale Models // Springer. New York, 2004. P. 179-198.

Ә. С. Мұратов, Г. Е. Сахметова, Л. Т. Тәшімов, А. М. Бренер

М. Әуезов атындағы ОҚМУ, Шымкент, Қазақстан

ФАЗАНЫҢ КӨЛЕМДІ БӨЛІНУІН ЕСКЕРЕ ОТЫРЫП АҒЫНДЫ ХИМИЯЛЫҚ ҚҰРЫЛҒЫЛАРДЫҢ ЖҰМЫС АЙМАҒЫН ЕСЕПТЕУ КЕЗІНДЕГІ АУҚЫМДЫ АУЫСУ

Аннотация. Мақалада реакторларда масса тасымалдаудың тиімділігін есептеуде ауқымды әсерді модельдеуге жаңа әдіс сипатталған. Бұл әдіс құрылғының барлық жұмыс көлемін өзара әрекеттесетін фазалар ағындарының әр түрлі қатынастары бар аймақтарға бөлуіне негізделген. Алынған өрнектерді химиялық құрылғыларды есептеу практикасында қолдануға болады.

Түйін сөздер: ауқымды әсер, химиялық құрылғы, саптама, шығару дәрежесі, масса тасымалдау.

А. С. Муратов, Г. Е. Сахметова, Л. Т. Ташимов, А. М. Бренер

ЮКГУ им. М. Ауезова, Шымкент, Қазақстан

МАСШТАБНЫЙ ПЕРЕХОД ПРИ РАСЧЕТЕ РАБОЧЕЙ ЗОНЫ ПРОТОЧНЫХ ХИМИЧЕСКИХ АППАРАТОВ С УЧЕТОМ ОБЪЕМНОГО РАСПРЕДЕЛЕНИЯ ФАЗ

Аннотация. В работе описан новый подход к моделированию масштабного эффекта при расчете эффективности массообмена в реакторах. Этот подход основан на делении всего рабочего объема аппарата на зоны с различными соотношениями потоков взаимодействующих фаз. Полученные выражения могут найти применение в практике расчета химических аппаратов.

Ключевые слова: масштабный эффект, химический аппарат, насадка, степень извлечения, массообмен.

Information about the authors:

Muratov Ablakim – Doctor of Technical Sciences, Professor, M. Aueзов South-Kazakhstan State University, "Information Technologies and Energy" Higher School, Department of "Information Systems and Modeling"

Sakhmetova Gulmira – Master, senior lecturer, M. Aueзов South-Kazakhstan State University, "Information Technologies and Energy" Higher School, Department of "Power and Non-traditional Energy Systems"

Tashimov Lesbek – Doctor of Technical Sciences, Professor, Academician of the National Academy of Sciences of Kazakhstan, Representative Office of the National Academy of Sciences of the Republic of Kazakhstan for the South Kazakhstan Region.

Brener Arnold – Doctor of Technical Sciences, Professor, M. Aueзов South-Kazakhstan State University, "Information Technologies and Energy" Higher School, Department of "Computer Science and Software".

**Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www.nauka-nanrk.kz

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://geolog-technical.kz/index.php/kz/>

Верстка Д. Н. Калкабековой

Подписано в печать 02.04.2018.
Формат 70x881/8. Бумага офсетная. Печать – ризограф.
16,9 п.л. Тираж 300. Заказ 2.