

**ISSN 2518-170X (Online),  
ISSN 2224-5278 (Print)**

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ  
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

Қ. И. Сәтпаев атындағы Қазақ ұлттық техникалық зерттеу университеті

# Х А Б А Р Л А Р Ы

## ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК  
РЕСПУБЛИКИ КАЗАХСТАН  
Казахский национальный исследовательский  
технический университет им. К. И. Сатпаева

## NEWS

OF THE ACADEMY OF SCIENCES  
OF THE REPUBLIC OF KAZAKHSTAN  
Kazakh national research technical university  
named after K. I. Satpayev

SERIES  
OF GEOLOGY AND TECHNICAL SCIENCES

**3 (435)**

MAY – JUNE 2019

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

---

---

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруды. Web of Science зерттеушілер, авторлар, баспашилар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енүі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редакторы  
э. ф. д., профессор, КР ҮГА академигі  
**И.К. Бейсембетов**  
Бас редакторының орынбасары  
**Жолтаев Г.Ж.** проф., геол.-мин. ф. докторы  
Редакция алқасы:

**Абаканов Т.Д.** проф. (Қазақстан)  
**Абишева З.С.** проф., академик (Қазақстан)  
**Агабеков В.Е.** академик (Беларусь)  
**Алиев Т.** проф., академик (Әзірбайжан)  
**Бакиров А.Б.** проф., (Қыргыстан)  
**Беспаев Х.А.** проф. (Қазақстан)  
**Бишимбаев В.К.** проф., академик (Қазақстан)  
**Буктуков Н.С.** проф., академик (Қазақстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Тәжікстан)  
**Грэвис Р.М.** проф. (АҚШ)  
**Ерғалиев Г.К.** проф., академик (Қазақстан)  
**Жуков Н.М.** проф. (Қазақстан)  
**Қожахметов С.М.** проф., академик (Казахстан)  
**Конторович А.Э.** проф., академик (Ресей)  
**Курскеев А.К.** проф., академик (Қазақстан)  
**Курчавов А.М.** проф., (Ресей)  
**Медеу А.Р.** проф., академик (Қазақстан)  
**Мұхамеджанов М.А.** проф., корр.-мүшесі (Қазақстан)  
**Нигматова С.А.** проф. (Қазақстан)  
**Оздоев С.М.** проф., академик (Қазақстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Қазақстан)  
**Сейтов Н.С.** проф., корр.-мүшесі (Қазақстан)  
**Сейтмуратова Э.Ю.** проф., корр.-мүшесі (Қазақстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (АҚШ)  
**Штейнер М.** проф. (Германия)

«ҚР ҮГА Хабарлары. Геология мен техникалық ғылымдар сериясы».

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РКБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрагат комитетінде 30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылдан 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,  
<http://www.geolog-technical.kz/index.php/en/>

---

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2019

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыра көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «Аруна» ЖҚ, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р  
д. э. н., профессор, академик НАН РК

**И. К. Бейсембетов**

Заместитель главного редактора

**Жолтаев Г.Ж.** проф., доктор геол.-мин. наук

Р е д а к ц и о н а я к о л л е г и я:

**Абаканов Т.Д.** проф. (Казахстан)  
**Абишева З.С.** проф., академик (Казахстан)  
**Агабеков В.Е.** академик (Беларусь)  
**Алиев Т.** проф., академик (Азербайджан)  
**Бакиров А.Б.** проф., (Кыргызстан)  
**Беспаев Х.А.** проф. (Казахстан)  
**Бишимбаев В.К.** проф., академик (Казахстан)  
**Буктуков Н.С.** проф., академик (Казахстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Таджикистан)  
**Грэвис Р.М.** проф. (США)  
**Ергалиев Г.К.** проф., академик (Казахстан)  
**Жуков Н.М.** проф. (Казахстан)  
**Кожахметов С.М.** проф., академик (Казахстан)  
**Конторович А.Э.** проф., академик (Россия)  
**Курскеев А.К.** проф., академик (Казахстан)  
**Курчавов А.М.** проф., (Россия)  
**Медеу А.Р.** проф., академик (Казахстан)  
**Мухамеджанов М.А.** проф., чл.-корр. (Казахстан)  
**Нигматова С.А.** проф. (Казахстан)  
**Оздоев С.М.** проф., академик (Казахстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Казахстан)  
**Сеитов Н.С.** проф., чл.-корр. (Казахстан)  
**Сейтмуратова Э.Ю.** проф., чл.-корр. (Казахстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (США)  
**Штейнер М.** проф. (Германия)

**«Известия НАН РК. Серия геологии и технических наук».**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Собственник: Республикаинское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год

Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,  
<http://nauka-nanrk.kz/geology-technical.kz>

© Национальная академия наук Республики Казахстан, 2019

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

Editor in chief  
doctor of Economics, professor, academician of NAS RK

**I. K. Beisembetov**

Deputy editor in chief

**Zholtayev G.Zh.** prof., dr. geol-min. sc.

Editorial board:

**Abakanov T.D.** prof. (Kazakhstan)  
**Abisheva Z.S.** prof., academician (Kazakhstan)  
**Agabekov V.Ye.** academician (Belarus)  
**Aliyev T.** prof., academician (Azerbaijan)  
**Bakirov A.B.** prof., (Kyrgyzstan)  
**Bespayev Kh.A.** prof. (Kazakhstan)  
**Bishimbayev V.K.** prof., academician (Kazakhstan)  
**Buktukov N.S.** prof., academician (Kazakhstan)  
**Bulat A.F.** prof., academician (Ukraine)  
**Ganiyev I.N.** prof., academician (Tadzhikistan)  
**Gravis R.M.** prof. (USA)  
**Yergaliев G.K.** prof., academician (Kazakhstan)  
**Zhukov N.M.** prof. (Kazakhstan)  
**Kozhakhmetov S.M.** prof., academician (Kazakhstan)  
**Kontorovich A.Ye.** prof., academician (Russia)  
**Kurskeyev A.K.** prof., academician (Kazakhstan)  
**Kurchavov A.M.** prof., (Russia)  
**Medeu A.R.** prof., academician (Kazakhstan)  
**Muhamedzhanov M.A.** prof., corr. member. (Kazakhstan)  
**Nigmatova S.A.** prof. (Kazakhstan)  
**Ozdoyev S.M.** prof., academician (Kazakhstan)  
**Postolatii V.** prof., academician (Moldova)  
**Rakishev B.R.** prof., academician (Kazakhstan)  
**Seitov N.S.** prof., corr. member. (Kazakhstan)  
**Seitmuratova Ye.U.** prof., corr. member. (Kazakhstan)  
**Stepanets V.G.** prof., (Germany)  
**Humphery G.D.** prof. (USA)  
**Steiner M.** prof. (Germany)

**News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,  
<http://nauka-namrk.kz/geology-technical.kz>

---

© National Academy of Sciences of the Republic of Kazakhstan, 2019

Editorial address: Institute of Geological Sciences named after K.I. Satpayev  
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

**N E W S**

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

**SERIES OF GEOLOGY AND TECHNICAL SCIENCES**

ISSN 2224-5278

Volume 3, Number 435 (2019), 102 – 108

<https://doi.org/10.32014/2019.2518-170X.74>

UDC 621.9.1

**T. G. Nasad<sup>1</sup>, K. T. Sherov<sup>2</sup>, B. N. Absadykov<sup>3</sup>, S. O. Tusupova<sup>2</sup>,  
A. A. Sagitov<sup>2</sup>, G. B. Abdugaliyeva<sup>2</sup>, A. E. Okimbayeva<sup>2</sup>**

<sup>1</sup>Engels Technological Institute (branch) of the Federal State Educational Establishment of Higher Professional Education «Saratov State Technical University named after Yu. A. Gagarin», Saratov Region, Engels, Russia,

<sup>2</sup>Karaganda State Technical University, Karaganda, Kazakhstan,

<sup>3</sup>A. B. Bekturov Institute of Chemical Sciences, Almaty, Kazakhstan.

E-mail: tgnas@mail.ru, shkt1965@mail.ru, b\_absadykov@mail.ru,

suleeva.s@inbox.ru, almat1990@mail.ru, Gulnura84@mail.ru, erkinovna89@mail.ru

## **FORMATION MANAGEMENT IN PARTS PROCESSING REGENERATED BY SURFACING**

**Abstract.** In this paper, we consider the control of the shape formation of the surface and the formation of specified properties, with the restoration of parts by overlaying. As an economically advantageous way of forming the re-welded part by the authors, a method of friction treatment is proposed. A mathematical model of thermal processes in the tool and part has been developed, which makes it possible to calculate temperatures in contacting bodies by calculation and to provide values close to optimal.

It has been experimentally established that the temperature field in the instrument is determined by a number of factors: the operating time, the thermos-physical and physic-mechanical characteristics of the instrumental and processed materials; intensity of heat release, dimensional characteristics of contacting bodies. In modelling, taking into account the schematization, the part is represented as a semispace, along the surface of which a linear thermal source of length  $B$ , intensity  $q_1$ , moves with speed  $S_m$  with boundary conditions of the second kind.

Also shown is a dependency of heating temperature of the disk from the distance to the heat source. It is established that a fairly sharp drop in temperature occurs as the heat source is removed. Relatively high temperatures remain at a distance  $R < 10$  mm, after which a sharp decrease is observed.

The maximum value of the instrument's heating temperature during the entire period of resistance did not exceed 90 °C. The average value of the disk heating temperature was 70–75 °C.

**Keywords:** overlaying, friction treatment, temperature field, heat source, friction disk, thermal conductivity, thermo-friction cutting.

**The relevance of research.** Modern machine engineering constantly increases the requirements for the quality of the surface of critical parts, which entails the further development of new approaches and methods for controlling surface shaping processes.

At present, methods for multi-electrode welding and overlaying in protective environments are mainly used for the repair and restoration of engineering parts. The range of parts is quite diverse, starting from the cross-section of cardan shafts, hinges to tooling and stamps.

Methods combined with machining processes in the plastic condition, as well as methods for controlling the composition and structure of the overlayed metal by forming combinations of electrodes and filler materials, allow metal transfer through a concentrated energy flow (arc) during its deposition [1, 2]. Intensification of the above processes is achieved through the use of shock loads, the combination of different methods of processing by concentrated energy flows (CEF), the use of powder and nanomaterials as the main and filler materials. Electro-physical methods of processing are widely used, such as elastic vibrations of sound and ultrasonic frequency ranges, vibration processing, high frequency currents, laser and electron radiations. Despite the offered technologies, significant growth in the quality of the material structure, and therefore the level of the product properties complex, is not achieved due to a constant

change in the parameters of the crystallization process associated with the dynamics of heat input and heat removal from molten metal, changes in the chemical composition of the melt, formed by the electrode material, filler material and the main metal of the product, which passes into the melt. The structure of the seam is formed as a result of a balance between the processes of heat transfer, diffusion, chemical reaction between the alloy components against the background of a rapid transition of the melt from overheating to supercooling. At the same time, the qualitative and quantitative indices of the crystallization process, even if expensive materials and equipment are used, can influence the results of the technological process in very wide redistribution, up to the point of putting the product into flaw. The most effective results can be achieved by using combined technologies, such as sonication, additional thermal effects on the melt during the treatment with concentrated energy flows (CEF), the use of forced shaping processes and combined machining (for example, frictionmachining).

Particular importance in welding and overlaying has the formation of structure around the seam zone and the weld metal itself in connection with the periodicity of the thermal action on them during heating, cooling and crystallization [2, 3]. In most cases, the periodicity of the main technological effect on the product is compensated for by periodic auxiliary technological influences such as preheating the surface to reduce the temperature gradients in welding and surfacing in the base material, the subsequent heating or cooling in thermostats to reduce the cooling rate, the periodic thermal action on the molten metal in the process of its crystallization, periodic electromagnetic and ultrasonic effects for the purpose of grinding the structure of the weld metal, using the vibrations of the welded article; impulse supply of electrodes and additives, etc.

On the basis of Prigogine principle – the minimum production of entropy applicable to non-equilibrium physical-chemical processes proceeding at a constant speed, we can speak of the predominance of heterogeneous sequential crystallization, which is energetically more advantageous than the bulk homogeneous solidification, and the existence of both mechanisms in competitive interaction and the dominance of heterogeneous crystallization.

The dynamics of supercooling at the interface between the phases and in the melt volume of the welding-surfacing bath, as part of the process of cooling and crystallization of the welding or surfacing seam, can be different, due to a change in the chemical composition in the interphase boundary zone in the process of separation diffusion and supercooling degradation on one side and introducing, for example, filler material into the tail part of the bathtub on the other side. It should also take into account the release of heat in the latent heat of fusion during crystallization at the interphase boundary, which also reduces the actual supercooling of the melts in the active growth zone of the crystals. This is typical for both heterogeneous and homogeneous crystallization. A significant difference in the process of crystallization of the melt of a welding-surfacing bath is the instability of the chemical composition of the melt in the crystallization region, associated with the supply of filler materials, the transition of chemical elements from protective media, the burning out of the melt components during the transition through the arc, the incompleteness of the reactions of chemical interaction due to the short-term metallurgical processes in melt the bath. A number of melt components in the crystal growth zone change the position of the non-equilibrium liquidus, both toward its growth and decrease.

Thus, control of surface formation and formation of specified properties, when restoring parts by surfacing, is quite a complex and urgent task.

**The advantages of the proposed technology.** The technological process of machining parts after overlaying includes, mainly, turning with tools with plates of superhard materials, as well as preliminary and final grinding operations. Typically, the processing of such parts is associated with certain difficulties due to the increased hardness of the material being processed. In some cases heat treatment (tempering) is applied, after which it becomes possible to turn or milling with sufficiently low resistance of cutting tools.

New technologies combining several types of energy [4, 5] may prove to be the most effective in solving such a complex multi-criteria problem. These methods include frictional processing combined with high-speed cutting. The friction disc is heated and the reduced surface of the part is pre-treated, after which the final processing is performed by the cutting tool at high speeds. Also perspective is the combined processing methods based on the mechanism of cutting thermo-friction cutting at low speeds [6-9], such as multi-blade rotational turning [10, 11], rotational-friction turning [12, 13], thermos-friction milling and of the interval [14, 15].

The main advantage of these processing methods is the provision of high accuracy and quality of processing at a lower cost of operations due to the use of cutting tools made of non-instrumental materials. And also, with the right choice of optimal cutting conditions, the treatment with the proposed methods eliminates the need for the finishing operation - grinding.

**Mathematical modelling of thermal processes.** To ensure optimal conditions and processing conditions, it is necessary to strive to ensure optimal temperatures in the cutting zone [16-18]. The proposed mathematical model of thermal processes in the tool and the part allows us to calculate the temperatures in the contacting bodies by calculation and to provide close values to optimal. In frictional processing, the thermal action process is characterized by two modes, such as unsteady and steady. The unsteady mode takes place at the beginning of the processing, when the part and the tool begin to interact. To develop a mathematical model of thermophysical processes, it is necessary to schematize the process.

Taking into account the schematization, the part can be represented as a half-space, on the surface of which a linear thermal source of length  $B$ , with an intensity  $q_1$ , moves with velocity  $S_m$  with boundary conditions of the second kind [17, 19]:

$$q_1 = \varphi(x, y, z, \tau) = 0,$$

that is, the law of distribution of heat fluxes.

Initial conditions:

$$f_o(x, y, z) = \Theta_o,$$

where  $\Theta_o$  – the ambient temperature, ( $\Theta_o=20^\circ\text{C}$ ).

Formula for calculating temperature:

$$\theta(x, z) = \frac{q_1}{\pi\lambda} \exp\left(-\frac{S \cdot z}{2\omega}\right) K_o\left(\frac{S}{2\omega} \sqrt{x^2 + z^2}\right) \quad (1)$$

The friction disk is represented as a wedge with an angle of  $90^\circ$ , on the edge of which there acts a fixed, linear, continuously operating thermal source with intensity  $q_2$ .

$$\theta(x, z, \tau) = \frac{q_2}{4\pi\lambda_1} \left( -E_i\left[\frac{R^2}{4\omega_1\tau}\right] \right) \quad (2)$$

where  $R^2 = x^2 + y^2$ ;  $\tau = L_d/S$ .

where  $L_d$  – length of the surface to be treated, m;  $S$  – feed, m/sec;  $q_1$  – the heat release density of the source acting on the chips,  $\text{W/m}^2$ ;  $E_i$  – Euler function;  $x, z$  – coordinates of the point under study, m;  $\omega_1$  – coefficient of thermal diffusivity of the material of the disk,  $\text{m}^2/\text{sec}$ ;  $\lambda_1$  – coefficient of thermal conductivity of the material of the disk,  $\text{W/m}^\circ\text{C}$ ;  $\tau$  – time of action of the source, sec.

Since the heat source is located at the tip of the wedge, the thermal regime in it, taking into account the effect of the reflected sources, can be written as:

$$\theta(x, z, \tau) = \frac{q_2}{\pi\lambda_1} \left( -E_i\left[\frac{R^2}{4\omega_1\tau}\right] \right) \quad (3)$$

To determine the heat release density  $q_1$  and  $q_2$ , it is necessary to solve the heat balance problem, which determines the amount of heat entering the workpiece and the friction disk. To solve the balance problem, boundary conditions of the fourth kind are used, according to which there exists an equality of the mean or maximum temperatures within the contact area of two bodies.

We introduce the notation:

$$\psi_1 = \frac{1}{\pi\lambda} \exp\left(-\frac{S \cdot z}{2\omega}\right) K_o\left(\frac{S}{2\omega} \sqrt{x^2 + z^2}\right) \quad (4)$$

$$\psi_2 = \frac{1}{\pi\lambda_1} \left( -E_i\left[\frac{R^2}{4\omega_1\tau}\right] \right) \quad (5)$$

The coordinates of points for which it is necessary to calculate the temperature lie on the surface, i.e.  $x = 0$ . At a point with the coordinate  $z = 0$ , the Euler and Bessel functions tend to infinity, therefore it takes  $z = 0.05$ .

Taking into account formulas (4) and (5), the system of equations will have the form:

$$\begin{cases} q_1 B + q_2 \pi D = P_z V \\ \psi_1 q_1 = \psi_2 q_2 \end{cases} \quad (6)$$

Solving the system of equations, we calculate accordingly the values of  $q_1$   $q_2$ , which determine the heat fraction for calculating the temperature of the part and the friction disk:

$$q_1 = \frac{P_z V}{\left( B + \frac{\psi_1 \lambda_2}{\psi_2 \lambda_1} \pi D_{dp} \right)} \quad (7)$$

$$q_2 = q_1 \frac{\psi_1}{\psi_2} \quad (8)$$


With tool diameter  $D = 500$  mm with cutting modes  $V = 10$  m/s,  $S = 60$  mm/min, the heat balance was 93% and 7%, respectively. 93% enters the body of the friction disk and dissipates in it by thermal conductivity. The remaining 7% of the heat goes to the heating of the part. Knowing the ratio of the amount of heat entering into the contacting bodies, it is possible to determine the surface temperature of the workpiece and, through changing the cutting conditions, ensure the optimum temperature in the contact zone.

It has been experimentally established [17, 20] that the temperature field in the instrument is determined by a number of factors: the operating time, the thermo-physical and physical-mechanical characteristics of the instrumental and processed materials; intensity of heat release, dimensional characteristics of contacting bodies.

The operating time of the friction disc determines the length of the machined surface and the cutting modes.

Figure shows the plot of the heating temperature of the disk from the distance to the heat source.

The graph (see the figure) characterizes quite a sharp drop in temperature as you move away from the heat source. Relatively high temperatures remain at a distance  $R < 10$  mm, after which a sharp decrease is observed. The maximum value of the instrument's heating temperature during the entire period of resistance did not exceed 90°C. The average value of the disk heating temperature was 70÷75°C.

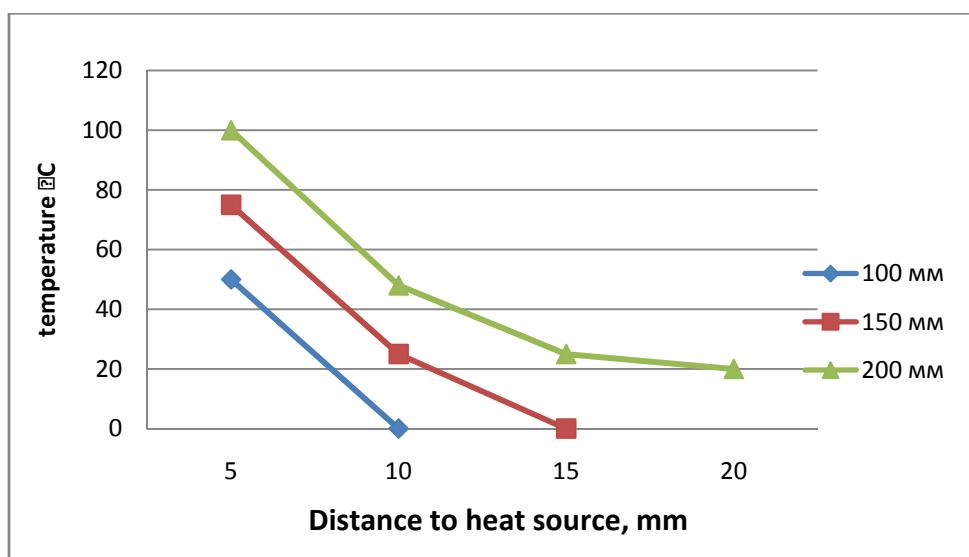

Dependence of the heating temperature of a disk from the distance to the heat source

**Conclusions.**

1. Friction machining is the most effective and economically profitable way of forming a part that has been repaired by overlaying, ensuring uniform heating of the surface and at the same time removing the defective layer.

2. Heating the surface takes place in two modes: stationary and non-stationary. The non-stationary mode takes an insignificant period of time and depends on the cutting regimes, thermo-physical and physical-mechanical characteristics of the contacting pair.

3. As a tool material for the friction disk, it is recommended to choose materials with a high coefficient of thermal conductivity, as they increase the heat flow into the body of the tool and actively exchange heat with the environment. It is also necessary to take into account the thermo-physical characteristics of the material being processed to ensure the optimum temperature in the disk-part pair.

**Т. Г. Насад<sup>1</sup>, К. Т. Шеров<sup>2</sup>, Б. Н. Абсадыков<sup>3</sup>, С. О. Тусупова<sup>2</sup>,  
А. А. Сагитов<sup>2</sup>, Г. Б. Абдугалиева<sup>2</sup>, А. Е. Окимбаева<sup>2</sup>**

<sup>1</sup>Энгельс технологиялық институты (филиал) Ю. А. Гагарин атындағы  
Саратов мемлекеттік техникалық университеті, Энгельс, Ресей,

<sup>2</sup>Қарағанды мемлекеттік техникалық университеті, Қарағанды, Қазақстан,

<sup>3</sup>А. Б. Бектуров атындағы химия ғылымдары институты, Алматы, Қазақстан

**БАЛҚЫМА ҚАПТАУМЕН ҚАЛПЫНА КЕЛТІРІЛГЕН ТЕТІКТЕРДІ ӨНДЕУ КЕЗІНДЕ  
ПШИНҚАЛЫПТАСТАҮРУДЫ БАСҚАРУ**

**Аннотация.** Берілген жұмыста бөлшекті балқыма қаптаумен қалпына келтіру кезіндегі бет пішіннің жасалуын басқару және берілген қасиеттерді қалыптастыру сұрақтары қарастырылған. Балқыма қаптаумен қалпына келтірілген бөлшектің пішінің жасаудың экономикалық тиімді әдісі ретінде автормармен фрикциондық өндеу әдісі ұсынылған. Құрал мен бөлшектергі жылулық үрдістердің математикалық үлгісі даярланды, ол түйісуши денелердегі температуралы есептік жолмен анықтауга және онтайлыға жақын мәнді қамтамасыз етуге мүмкіндік береді.

Құралдағы температуралық өріс бірқарат факторлармен анықталатыны тәжірибелік анықталды, ол факторларға: жұмыс уақыты, құралдың және өндешуші материалдың жылулық-физикалық пен физикалық-механикалық сипаттары, жылу бөлінудің карқындылығы, түйісуши денелердің өлшемдік сипаттамалары жатады.

Сұлбалауды ескеріп үлгілеу кезінде бөлшек жарты кеңістік түрінде болады, оның бетімен ұзындығы В, карқындылығы  $q_1$ , жылдамдығы  $S_m$  екілік типті шекаралық жағдайға ие болатын сызықтық жылу көзі орын ауыстырады.

Сонымен қоса, дискинің қызу температурасының жылулық көзге дейінгі арақашықтықта тәуелділік графигі келтіріледі. Температуралық айтарлықтай тез төмендеуі жылулық көзден алыстауына байланысты болатыны анықталды. Салыстырмалы жоғары температура  $R < 10$  мм қашықтықта сакталады, содан кейін тез төмендеу байқалады. Құралдың қызу температурасының ең көп мәні тұрақтылықтың барлық кезең барысында 90°C аспады. Дискинің қызу температурасының орташа мәні 70–75 °C құрады.

**Түйін сөздер:** балқыма қаптау, фрикциондық өндеу, температуралық өріс, жылулық көзі, фрикциондық диск, жылуоткізгіштік, термофрикциондық кесу.

**Т. Г. Насад<sup>1</sup>, К. Т. Шеров<sup>2</sup>, Б. Н. Абсадыков<sup>3</sup>, С. О. Тусупова<sup>2</sup>,  
А. А. Сагитов<sup>2</sup>, Г. Б. Абдугалиева<sup>2</sup>, А. Е. Окимбаева<sup>2</sup>**

<sup>1</sup>Энгельсский технологический институт (филиал)

Саратовского государственного технического университета им. Ю. А. Гагарина, Энгельс, Россия,

<sup>2</sup>Карагандинский государственный технический университет, Караганда, Казахстан,

<sup>3</sup>Институт химических наук им. А. Б. Бектурова, Алматы, Казахстан

## **УПРАВЛЕНИЕ ФОРМООБРАЗОВАНИЕМ ПРИ ОБРАБОТКЕ ДЕТАЛЕЙ, ВОССТАНОВЛЕННЫХ НАПЛАВКОЙ**

**Аннотация.** В данной работе рассмотрены вопросы управления формообразованием поверхности и формирования заданных свойств при восстановлении деталей наплавкой. В качестве экономически выгодного способа формообразования восстановленной наплавкой детали авторами предложен способ фрикционной обработки. Разработана математическая модель тепловых процессов в инструменте и детали, которая позволяет расчетным путем определять температуры в контактирующих телах и обеспечивать значения, близкие к оптимальным.

Экспериментально установлено, что температурное поле в инструменте определяется рядом факторов: временем работы, теплофизическими и физико-механическими характеристиками инструментального и обрабатываемого материалов; интенсивностью тепловыделения, размерными характеристиками контактирующих тел. При моделировании с учетом схематизации деталь представлена как полупространство, по поверхности которого перемещается линейный тепловой источник длиной  $B$ , интенсивностью  $q_1$ , со скоростью  $S_m$ , с граничными условиями второго рода.

Также приводится график зависимости температуры нагрева диска от расстояния до теплового источника. Установлено, что достаточно резкое снижение температуры происходит по мере удаления от теплового источника. Относительно высокие температуры сохраняются на расстоянии  $R < 10$  мм, после чего наблюдается резкое снижение. Максимальное значение температуры нагрева инструмента в течение всего периода стойкости не превышало 90°C. Среднее значение температуры нагрева диска составило 70÷75 °C.

**Ключевые слова:** наплавка, фрикционная обработка, температурное поле, тепловой источник, фрикционный диск, теплопроводность, термофрикционное резание.

### **Information about authors:**

Nasad Tatyana Gennadievna, Doctor of Engineering Sciences, Professor, Engels Technological Institute (branch) of the Federal State Educational Establishment of Higher Professional Education «Saratov State Technical University named after Gagarin Yu.A.», Saratov Region, Engels, Russia; tgnas@mail.ru; <https://orcid.org/0000-0002-9957-6645>

Sherov Karibek Tagayevich, Doctor of Engineering Sciences, Professor, Karaganda state technical university, Karaganda, Kazakhstan; shkt1965@mail.ru; <https://orcid.org/0000-0003-0209-180X>

Absadykov Bakhyt Narikbayevich, Doctor of Technical Sciences, Professor, the Corresponding member of National Academy of Sciences of the Republic of Kazakhstan, A. B. Bekturov Institute of Chemical Sciences, Almaty, Kazakhstan; b\_absadykov@mail.ru; <https://orcid.org/0000-0001-7829-0958>

Tusupova Sayagul Oralovna, PhD student, Karaganda state technical university, Karaganda, Kazakhstan; suleeva.s@inbox.ru; <https://orcid.org/0000-0002-8920-4901>

Sagitov Almat Ardagovich, PhD student, Karaganda state technical university, Karaganda, Kazakhstan; almat1990@mail.ru; <https://orcid.org/0000-0003-3835-9353>

Abdugalieva Gulnur Baymurzaevna, Candidate of Technical Sciences, Senior Lecturer, Karaganda state technical university, Karaganda, Kazakhstan; Gulnura84@mail.ru; <https://orcid.org/0000-0003-3469-3901>

Okimbayeva Assel Yerkinovna, teacher, Karaganda state technical university, Karaganda, Kazakhstan; erkinovna89@mail.ru; <https://orcid.org/0000-0002-9306-9722>

**REFERENCES**

- [1] Panteleenko F.I., Lyalakin V.P., Ivanov V.P., Konstantinov V.M. Restoration of machine parts: Reference book. M.: Mechanical engineering, 2003. 672 p. (in Rus.).
- [2] Ivanov V.P. Restoration of worn parts by automatic vibro-arc surfacing. Chelyabinsk, 1976. 207 p. (in Rus.).
- [3] Potapov A.K. Restoration of worn parts by surfacing with tubular electrodes. M.: TsBTI, 1980. 33 p. (in Rus.).
- [4] Kiryushin D.E., Kiryushin I.E. High-speed face milling of titanium alloys // STIN. 2008. N 7. P. 29-32. <https://doi.org/10.3103/s1068798x08100237> (in Eng.).
- [5] Kiryushin I.E., Kiryushin D.E. High-speed processing of hard-to-process materials: monograph. Saratov: Sarat. state tech. university, 2009. 148 p. (in Rus.).
- [6] Kushnazarov I.K., Goldenberg A., Mussaev F. Method of cutting metal blanks // Patent No. 2738 UZ. Special Herald. 1995. N 3. P. 33-34 (in Rus.).
- [7] Alikulov D.E., Muravev O.P., et al. Method of thermofriction treatment of the plane and the design of the friction disc // Innovative patent No. 22998 of the Republic of Kazakhstan for invention on 15.10.2010. Bul. N 10 (in Rus.).
- [8] Buzauova T.M., Imasheva K.I., et al. A method of thermofriction cutting-hardening treatment of cylindrical surfaces and the design of a friction disc // Innovative patent No. 25649 of the RK for an invention. 16.04.2012. Bul. N 4.
- [9] Mazdubay A.V., Donenbaev B.S., Musaev M.M., et al. The method of thermofriction cutting of metal blanks with cooling and the design of a circular saw // Patent No. 31934 RK for an invention. 03/30/2017. N 6.
- [10] Kushnazarov I.K., Mardonov B.T. Improving the quality of the treated surface in multi-rotational rotary turning // Higher school publisher. Proceedings of universities. Tashkent, 2001. N 1. P. 43-44.
- [11] Khodzhibergenov D.T., Esirkepov A. Russian Engineering Research. Allerton Press, Inc. 2015. Vol. 35, N 1. P. 43-45. <https://doi.org/10.3103/s1068798x1501013x> (in Eng.).
- [12] Rakishev A.K. Chip formation rotational-frictional turning cylindrical surfaces of agricultural machinery parts // Modern science success journal. Belgorod, 2017. Vol. 1, N 5. P. 104-111 (in Eng.).
- [13] Sherov K.T., Sakhimbayev M.R., Sherov A.K., Mazdubay A.V., Rakishev A.K., et al. Mathematical modeling of thermofrictional milling process using ANSYS WB software // Journal of Theoretical and Applied Mechanics. Sofia, 2017. Vol. 47, N 2. P. 24-33. <https://doi.org/10.1515/jtam-2017-0008> (in Eng.).
- [14] Sakhimbayev M.R., Donenbayev B.S., Ainabekova S. Experimental Research of Rotational-and-Frictional Boring of Big Holes in Large Parts // Journal of Theoretical and Applied Mechanics. Sofia, 2017. Vol. 47, N 4. P. 23-36. <https://doi.org/10.1515/jtam-2017-0018> (in Eng.).
- [15] Sherov K.T., Alikulov D.E. Control ruler for angles between planes of V-shaped guides // Measurement Techniques. July 2012. Vol. 55, Issue 4. P. 397-399. <https://doi.org/10.1007/s11018-012-9971-5> (in Eng.).
- [16] Kurmangaliyev T.B., Sakhimbayev M.R., Sakhimbayeva D.R., et al. (2018). Experimental study of optimal parameters of pneumatic motor of vibration table for inertial vibroabrasive machining the parts on the basis of beryllium oxide // News of the National academy of sciences of the Republic of Kazakhstan. Series of Geology and Technical sciences. 2018. Vol. 5, N 431. P. 184-191. <https://doi.org/10.32014/2018.2518-170X.24>. ISSN 2518-170X (Online). ISSN 2224-5278 (Print) (in Eng.).
- [17] Nasad T.G. Surface quality after high-speed heat treatment // Mechanical engineering technology. 2004. N 3(27). P. 11-13 (in Rus.).
- [18] Reznikov A.N., Reznikov L.A. Thermal processes in technological systems. M.: Mechanical engineering, 1990. 288 p. (in Rus.).
- [19] Sherov K.T., Sakhimbayev M.R., Absadykov B.N., Sakhimbayeva D.R., Buzauova T.M., Karsakova N.G., Gabdysalyk R. Control's accuracy improvement and reduction of labor content in adapting of ways of metalcutting tools // News of the National academy of sciences of the Republic of Kazakhstan. Series of Geology and Technical sciences. 2018. Vol. 6, N 432. P. 170-179. <https://doi.org/10.32014/2018.2518-170X.47> ISSN 2518-170X. (Online). ISSN 2224-5278 (Print) (in Eng.).
- [20] Kazinsky A.A., Nasad T.G. Improving the performance characteristics of machine parts reconstructed using the surfacing method. // Improving the reliability and safety of transport facilities and communications: Sat. tr. III Intern. scientific-practical Conf. Saratov, Nov. 15-16. 2017. 2017. P. 231-236 (in Rus.).

**Publication Ethics and Publication Malpractice  
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct ([http://publicationethics.org/files/u2/New\\_Code.pdf](http://publicationethics.org/files/u2/New_Code.pdf)). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www:nauka-nanrk.kz

**ISSN 2518-170X (Online), ISSN 2224-5278 (Print)**

<http://www.geolog-technical.kz/index.php/en/>

Верстка Д. Н. Калкабековой

Подписано в печать 11.06.2019.  
Формат 70x881/8. Бумага офсетная. Печать – ризограф.  
15,7 п.л. Тираж 300. Заказ 3.