

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Satbayev University

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Satbayev University

**SERIES
OF GEOLOGY AND TECHNICAL SCIENCES**

5 (443)

SEPTEMBER – OCTOBER 2020

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Б а с р е д а к т о р ы
э. ғ. д., профессор, ҚР ҰҒА академигі

И.К. Бейсембетов

Бас редакторының орынбасары
Жолтаев Г.Ж. проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., академик (Қазақстан)
Абсадықов Б.Н. проф., корр.-мүшесі (Қазақстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Әзірбайжан)
Бакиров А.Б. проф., (Қырғызстан)
Буктуков Н.С. проф., академик (Қазақстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Жарменов А.А. проф., академик (Қазақстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., академик (Қазақстан)
Мұхамеджанов М.А. проф., корр.-мүшесі (Қазақстан)
Оздоев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (АҚШ)
Штейнер М. проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде
29.07.2020 ж. берілген № **KZ39VPY00025420** мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Тақырыптық бағыты: *геология және техникалық ғылымдар бойынша мақалалар жариялау.*

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2020

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыр көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Главный редактор
д. э. н., профессор, академик НАН РК

И. К. Бейсембетов

Заместитель главного редактора
Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Редакционная коллегия:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., академик (Казахстан)
Абсадыков Б.Н. проф., чл.-корр. (Казахстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Буктуков Н.С. проф., академик (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Жарменов А.А. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., академик (Казахстан)
Мухамеджанов М.А. проф., чл.-корр. (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (США)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Тематическая направленность: *публикация статей по геологии и технических наукам.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2020

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.
Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

E d i t o r i n c h i e f

doctor of Economics, professor, academician of NAS RK

I. K. Beisembetov

Deputy editor in chief

Zholtayev G.Zh. prof., dr. geol-min. sc.

E d i t o r i a l b o a r d:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., academician (Kazakhstan)
Absadykov B.N. prof., corr. member. (Kazakhstan)
Agabekov V.Ye. academician (Belarus)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Buktukov N.S. prof., academician (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadjikistan)
Gravis R.M. prof. (USA)
Zharmenov A.A. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., academician (Kazakhstan)
Muhamedzhanov M.A. prof., corr. member. (Kazakhstan)
Ozdoyev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Stepanets V.G. prof., (Germany)
Humphery G.D. prof. (USA)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *publication of papers on geology and technical sciences.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2020

Editorial address: Institute of Geological Sciences named after K.I. Satpayev

69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 5, Number 443 (2020), 13 – 20

<https://doi.org/10.32014/2020.2518-170X.99>

UDC 622.822:553

IRSTI 52.13.04

**Sh. K. Aitkazinova¹, A. A. Bek¹, K. N. Derbisov¹,
N. S. Donenbayeva¹, M. B. Nurpeissova¹, E. Levin²**

¹Satbayev University, Almaty, Kazakhstan;²Michigan Technological University, Michigan, USA.E-mail: shina.a@mail.ru., aiman.lady.bek@gmail.com, derbisov.k@mail.ru
nsdonchik@mail.ru, marzhan-nurpeissova@rambler.ru; e Levin@mtu.edu

PREPARING SOLUTIONS BASED ON INDUSTRIAL WASTE FOR FRACTURED SURFACE STRENGTHENING

Abstract. Results of longstanding researches of Satbayev University scientists on the development of modified building materials to strengthen cracked mountain structures based on industrial waste are considered. Industrial processing of technogenic raw materials (enrichment and processing waste, overburden and enclosing rocks), which is similar in composition to natural and used in conventional trend, scarcely different from industrial processing of mineral raw materials. Creation of effective technologies for the processing of technogenic raw materials is an urgent task, which make it possible to obtain competitive products from it for various industries.

Various methods of preparing solutions for strengthening of fractured rocks and building structures are analyzed. Research results of tailings of the Balkhash Mining and Metallurgical Combine and preparing solutions for strengthening fractured rocks and underground mining structures are presented. Rock mass strengthening in cracked areas is achieved by adding substances into the cracks, which after hardening and solidification with rocks, increase its shearing resistance characteristics. The most widespread hardening methods were cementation during mine workings (underground structures) in fractured rocks.

Significance of obtained results for construction industry is in expansion and reproduction of raw material base of building materials industry through the use of Mining and metallurgical complex waste (tailings) and development of resource-saving technologies. Practical significance of work is in the detailed development of modified method for the production of building materials and products.

Key words: field development, mine site, fracturing, cracks, rock mass caving, strengthening, mining waste, building materials, modified solutions.

Introduction. Mining enterprises of Kazakhstan pay special attention to the industrial safety of subsurface development. One of the real examples is geomechanical researches conducted by Satbayev University in the framework of the project “Risk reduction of technogenic disasters by developing innovative management methods” (2015-2017). Currently, within the framework of Project “Innovative methods development for prediction and assessment of rock mass state for the prevention of technogenic nature emergencies” researches on study and ensuring mountain structures stability are conducted by young scientists.

The content of the work. Problems of mine workings stability in fractured rocks are the most hard-solving problems in the construction and operation of mining enterprise. These problems intensely exist in the polymetallic deposits of Kazakhstan: Tekeli, Akzhal, Verkhnekairaktinsky, Karagaylinsky, Tekeli. Ores and enclosing rocks of these deposits are complicated by fractured deformations and make its development more difficult.

Research results of mine workings at the Akzhal mine (at mine site and underground horizons) showed that the largest number of dumps is confined to fractured rocks, and dumps volume is increasing as far as workings’ standing. Observations of the mine workings, which were performed on the fractured rocks, revealed that they are stable for a month. After two or three months, pins are formed up to 10-15 cm

in size. Pins and outfalls arise and develop within six months, roof collapses become acquainted in the form of domes. This acutely increases volume and complexity of the tunneling works, as well as the cost of workings fixing and repairing.

Stability of adjacent rock masses is determined by the degree of their fracturing. Strengthening technology of fractured massif should ensure the complete cracks filling in the massif with different composition and securely bind individual structural blocks into a single whole. One of the effective methods to prevent this type of rock deformation is their artificial strengthening which allows to provide the necessary slopes stability of inoperative mine sites and in some cases to prevent possible rock collapse in weakened areas, in others - significantly reduce the volume of overburden operations [1-3].

The most common strengthening method is rock cementation. Such method of ensuring the slopes stability of mine sites is complex task, solution of which should include not only parameters determination of stable slopes, but also their management to achieve the best economic results in the development of natural resources. Use of artificial strengthening of rocks and massifs allows increasing gradient of slope in areas with unstable rocks. Strengthening advisability is established by technical and economic calculations. Strengthening of some areas is achieved with the help of substances that significantly increase its strength characteristics. Adding substance in the massif is made under pressure, using cement solutions, silicates and polymer resins as hardening material, confirmed by publications of leading scientists in the field of mining [4-10].

To prevent the collapse of underground workings (underground structures), passed through fractured rocks, roof timber with metal fencing mesh and shotcreting are used. However, roof rocks cleavage of transport drift and significant rocks destruction indicates that this timber does not solve the problem of stability ensuring of workings and does not prevent deformations development. As a result, after 2-3 years of standing workings, timber are damaged and major repairs are required. Therefore, effective solution of controlling issue on geomechanical properties of rocks is particularly important for adjacent rock mass of mine sites and for underground workings passed through fractured rocks [11-13].

Researches on rock fracturing and methods development of controlling their properties were carried out for the conditions of Akzhal deposit. Analysis of geological conditions of the field and workings condition passed by fractured rocks showed that fracture systems of heavy pitch have great influence on the workings' stability. By nature, cracks vary from smooth, wavy to uneven, splintering. The width of the crack opening does not exceed 3 mm and averages 1.5-1.8 mm. Based on conducted researches on samples of fractured rocks, it was found that rocks have different degrees of fracture. According to the degree of change, they were classified into 3 groups: particularly, highly and partially disturbed (table 1).

Various strength characteristics of fractured rocks predetermine the need for differentiated approach to managing the rocks properties with fracturing intensity.

Table 1 – Classification of rocks, their physical and mechanical properties, structure and texture

№ group	Fracture intensity	Rock characteristics	№ sample	Compression strength on MPa	Rock strength by Protodiakonovf	Structure	Texture	Fracture plane state	Fracture positioning
I	Particularly fractured	Quartz-sericite chlorite	9	43,4	3	Small acinose	Fissile	Fracture planes are cragged	Fractures of parallel lamination
			10	44,8	3				
			11	65,5	5				
	Mean value		12	51,2	4				
II	Highly fractured	Sericite-quartz.	2	84	6	Small acinose	Massive	Fracture planes are cragged, hackly	Fractures multioriented
			4	103,6	7				
			14	106,4	8				
	Mean value			62,7	7				
III	Partially fractured	Diorite Quartzite	3	140,0	10	Small acinose	Massive	Fracture planes are cragged, hackly	Fractures multioriented, parallel lamination
			5	154,0	11				
			7	162,4	12				
	Mean value			152,1	11				

For highly fractured rocks with strength factor of 5-8, it is recommended that workings walls be coated with modified concrete in combination with roof timber. Application of waterproofer coat will significantly reduce rock pressure on timber, limit the weathering spread and delamination of overlying layers and prevent properties change of fractured rocks. To study the physical mechanical properties (PMP) of solutions of various compositions, cubic samples of cement and water with modifying additives were prepared in various percentages of cement weight. Research results are shown in figure 1.

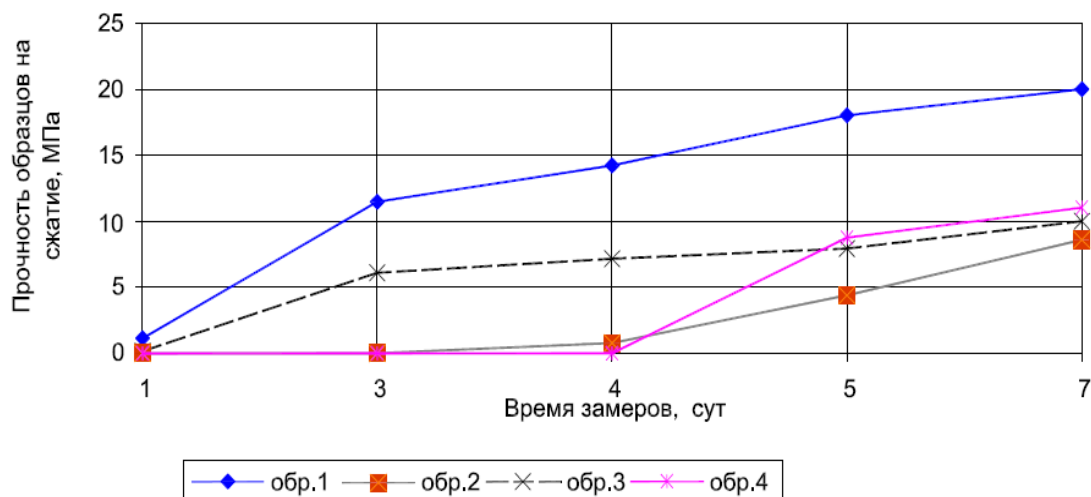


Figure 1 – Change dependency of concrete strength with various additives on time:

1 - Movilita additive; 2 - additive of sodium silicate and calcium chloride;
3 - additive of construction emulsion PVA-M; 4 - addition of high molecular polymer polyacrylamide

For safe deposit development on the underlying horizons, in order to prevent cavings, and also to suppress the dust formation of dumps, insulating solution was developed by our scientists in cooperation with “CelSIM” laboratory, composition of which is given below.

Known solution for strengthening fractured rocks described in the book Pevzner M.E. [14]. It contains cement, water and additive - calcium chloride in the amount of 1-2.2% by weight of cement. Solution has high cost.

Known composition for hardening rocks [15] and contains following components: wt, %

Carbamide resin brand KSM	88-92,
Watersoluble polyester blend	4-6
Aluminum chromophosphate	4-6,

Solution has high cost and must be prepared directly at the well.

We are declaring solution that includes cement, filler and water. The basis of the invention is solution creation for strengthening fractured surfaces, having low cost, sufficient fluidity to fill small cracks and adhesion to rocks, high strength of material obtained and allowing recovering mining waste - concentration plants tailings.

Invention relates to mining and building materials, namely to strengthen rocks with binder solution. Technical result: utilization of mining wastes - concentration plants tailings, achievement of high fluidity of solution, adhesion to rocks and strength of composition obtained.

To achieve this result, composition for strengthening fractured rocks containing cement, filler and water, according the invention results as the filler contains concentration plants tailings and additionally contains Movilite dispersion polymer powder with the following equivalence ratio, wt. %:

Cement	30-35
Concentration plants tailings.	45-50
Movilite dispersion polymer powder	0,8-2
Water other	

Specified equivalence ratio is optimal and obtained experimentally. On the one hand, necessary fluidity of solution and adhesion, and on the other hand, to obtain the material of the necessary strength after setting it with rocks. In each particular case, to select optimal composition of bonding solution, it is necessary to study the physical and chemical composition of tailings of various concentration plants.

For example, Portland cement M 400 of Karaganda cement plant and tailings of the Balkhash mining and metallurgical plant are acceptable for the Akzhal mine and Portland cement of the Shymkent cement plant and tailings of the Akbakay concentration plant itself are acceptable. The X-ray appearance of the Balkhash mining and metallurgical complex tailings (figure 2) shows mainly three components with 4.23 diffraction lines; 3.238; 2,455; 2.28; 2.237; 2.127; 1.977; 1.817; 1,669; 1.658; 1.541; 1.454; 1,388; 1,373, corresponding to quartz.

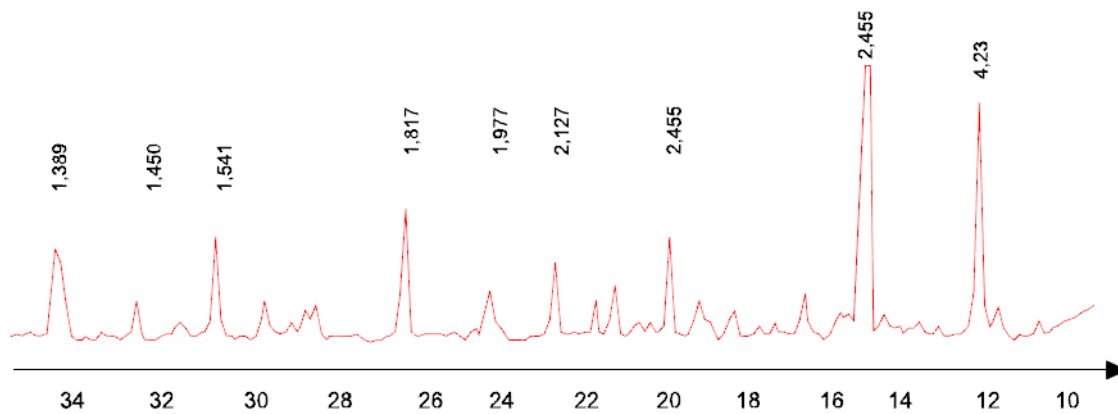


Figure 2 – The X-ray analysis of Balkhash mining and metallurgical complex tailings

After components dosing the cement, tailings and movilit are loaded into concrete mixer and mixed thoroughly. Then add water and mix. Finished composition is delivered by underground workings and pumped into disturbed pillars and roof of the chambers. To determine the strength, 4x4x16 cm samples were molded from the composition and compacted on vibrating plate for 45 sec. After a day, the samples were removed from the molds and stored in humid conditions for 28 days, and then physical and mechanical tests were carried out, results of which are presented in tables 1 and 2.

Table 1 – Physical and mechanical properties of the solution

	Composition of the solution, wt.%			Index			
	Cement	Concentration plants tailings	Movilit	Water	Compressive strength, MPa	Bending strength MPa	Slump, MM
Sample 1	30	50	4	16	32,5	4,7	150
Sample 2	32,5	47,5	3,5	16,5	35,6	5,2	145
Sample 3	35	45	3,0	17,0	37,2	5,8	143

Table 2 – Physical and mechanical properties of the composition

Index	Sample 1	Sample 2	Sample 3
Compressive strength, MPa	22,5	25,6	27,2
Frost resistance, cycles	10	12	15

Technical novelty of the created solution is confirmed by the patent of the Republic of Kazakhstan for the invention [19].

Analysis of mining and construction works showed that acid-resistant cements are the most widely applicable at present, which are obtained by mixing filler with sodium silicate and accelerator of setting and hardening process - calcium chloride of 30% concentration with a density of 1280 kg / m^3 . Therefore, liquid sodium silicate with modular number of 2, 5 and density of 1330 kg / m^3 and 1250 kg / m^3 was used to create modified solution. In the course of researches on solutions with high - molecular polymer additives the following polymers were tested: polyvinyl acetate dispersion - PVAD, builder dispersion "Movilit VDM-618". Observations results showed that the best adhesion with humid rocks is achieved in solutions of modified building dispersion "Movilit VDM-618" compositions (see figure 3, lines 1, 5). Therefore, solution modification of construction dispersion "Movilit VDM-618" significantly improves its properties; the set of strength occurs in humid aggressive environment. In addition, "Movilit" building dispersion adding to solution gives the properties of gas and water resistance, resistance to aggressive underground environments. To study adhesion, solution modified with various additives was applied to fractured rocks. Test results are shown in figure 3.

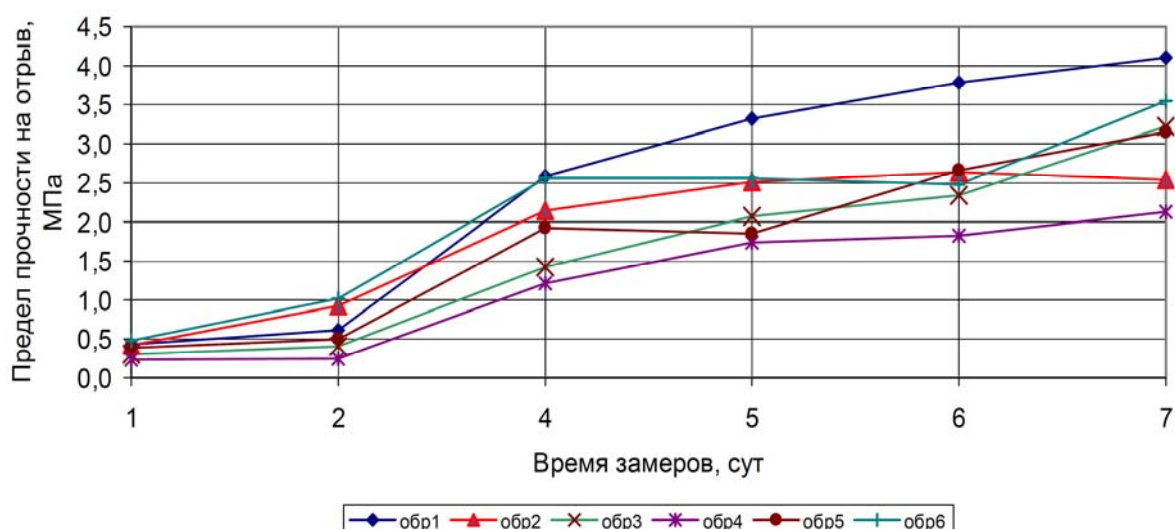


Figure 3 – Influence of time on the adhesion change of modified cementations' compositions with fractured rocks:

- 1 – with the addition "Movilit VDM-618"- 5% of cement composition;
- 2 - with the addition of sodium silicate with $\delta = 1.33 \text{ g / cm}^3$ and $m = 2.5$ calcium chloride;
- 3 - with the addition of sodium silicate with $\delta = 1.25 \text{ g / cm}^3$ and calcium chloride;
- 4 - with the addition of PVAD; 5– with the addition of PAA

Pilot tests of obtained composition in underground workings of the Akzhal mine showed its sufficient penetrability and rapid polymerization with its own high mechanical properties [20].

Conclusions. Use of concentration plants tailings will contribute to reduce composition cost and increase material strength. With more than 35% increase of cement amount and more than 4% increase super plasticizing additive - composition cost increases. With less than 30% decrease of cement amount and super plasticizing additive less than 3% decrease - strength of the obtained material increases.

Increasing of concentration plants tailings by more than 50% will lead to decrease in the solution fluidity and its adhesion to rocks, and less than 45% decrease will increase the composition cost.

Thus, use of developed solutions allows obtaining the roof with high strength and higher adhesion. It should also be noted that new solution use ensures strengthening of weak sections of open pit sides and underground mining structures and can significantly reduce the damage effect of concentration plants waste on environment.

**Ш. Қ. Айтказинова¹, А. А. Бек¹, Қ. Н. Дербісов¹,
Н. С. Доненбаева¹, М. Б. Нұрпейісова¹, Е. Левин²**

¹Сәтбаев университеті, Алматы, Қазақстан;

²Мичиган технология университеті, Мичиган, АҚШ

ӨНДІРІС ҚАЛДЫҚТАРЫ НЕГІЗІНДЕ ЖАРЫҚШАҚТАЛҒАН БЕТТЕРДІ БЕКІТУ ҮШІН ЕРІТІНДІЛЕР ЖАСАУ

Аннотация. Сәтбаев университеті ғалымдарының өнеркәсіп қалдығы негізінде жарықшақталған тау жыныстарын нығайту үшін жаңартылған құрылыс материалдарын жасау жөніндегі көпжылдық зерттеулерінің нәтижелері қарастырылды.

Табиғи құрамы жағынан жақын техногенді шикізаттарды (байыту қалдығын, аршыма және жанама тау жыныстары) және дәстүрлі бағыттарда пайдаланылатын минералды шикізаттарды өнеркәсіптік қайта өңдеудің айырмашылығы жоқ. Сондықтан, техногендік шикізатты қайта өңдеудің одан өнеркәсіптің түрлі салалары үшін бәсекеге қабілетті өнім алуға мүмкіндік беретін тиімді технологияларын құру бүгінгі күннің маңызды мәселесі болып отыр.

Карьер беткейлерінің құлауы мен шөгудің алдын алу үшін үлкен массивтердегі тау жыныстарының жасанды түрде беріктігін ұлғайтуға келмесе де, жекеленген беткей деформацияларын және жасанды бекемдеу әдісімен карьер беткейінде опырылудың алдын алу қазіргі таңда отандық және шетелдік карьерлерде қолданылуда. Көптеген карьерлерде жұмыс істемейтін ернеуді түзетін тау жыныстарының құрылымы мен физикалық-механикалық қасиеттері біртекті болып келеді. Карьер алаңындағы тау жыныстары біртекті болып түзілген күннің өзінде кен орнында, әдетте көптеген тектоникалық бұзылыс аймағы жиі кездеседі.

Тектоникалық бұзылыс аймағы, өз кезегінде өлшемдері мен кеңістікте таралуына байланысты беткейлер мен ернеудің орнықтылығына мейлінше кері әсерін тигізеді. Мұндай жағдайда бекіту арқылы тау жыныстарының үгілуі мен опырылуын баяулатуға, карьер беткейінің опырыла құлауының және тау жыныстарының сырғу беті арқылы жылжуының алдын алуға болады.

Мақалада жарықшақталған карьер беткейі мен құрылыс нысандары қабырғаларын бекіту үшін қажет ерітінділерді алу мүмкіндігі зерттелген. Балқаш тау-кен металлургия комбинатының (БТКМ) байыту қалдықтарын зерттеудің және жарықшақталған тау жыныстары мен құрылыс нысандарын нығайту үшін ерітінділерді алу нәтижелері келтірілген.

Өлсіреген учаскелердегі тау жыныстары массиві мен құрылыс қабырғаларының бекітілуіне, жарықшақтарға арнайы ертінді енгізу арқылы жүзеге асырылады, олар қатайғаннан кейін нысанның жылжу кедергі қабілетін арттырады. Бекемдейтін затты массивке енгізу қысым жасау арқылы жүзеге асады, бекемдейтін материал ретінде цемент ерітінділері, силикаттар және полимерлік материалдар қарастырылған. Бекіту әдістерінің арасында ең көп таралғаны – ол кен қазбаларын (жерасты құрылыстарын) жарықшақталған тау жыныстарында жүргізу кезінде цементтеу. Қолдану аясы – қатты жарықшақты үгітімелі және жартылай жарлыдан бастап ірі тасты құм мен жұмыртастарға дейінгі тау-кен жыныстарының массиві.

Құрылыс индустриясы үшін нәтиже маңызы құрылыс материалдар өнеркәсібінің шикізат базасын кен-металлургия кешен қалдығын (байыту фабрикалары қалдығын) пайдалану және ресурстарды үнемдейтін технологияларды дамыту арқылы құрылыс материалдар өнеркәсібінің шикізат базасын молайту және қайта жаңғырту болып саналады. Жұмыстың практикалық маңыздылығы – құрылыс материалдары мен бұйымдарын өндірудің модификацияланған әдісінің жасалғандығында.

Түйін сөздер: кен орындарын игеру, карьер, бұзылу, жарықшақ, тау-кен массивінің опырылуы, бекіту, тау-кен өндіріс қалдықтары, құрылыс материалдары, ерітінділер.

**Ш. Қ. Айтказинова¹, А. А. Бек¹, Қ. Н. Дербісов¹,
Н. С. Доненбаева¹, М. Б. Нұрпейісова¹, Е. Левин²**

¹Satbayev University, Казахстан, Алматы, Казахстан;

²Мичиганский технологический университет, Мичиган, США

СОЗДАНИЕ РАСТВОРОВ НА ОСНОВЕ ОТХОДОВ ПРОИЗВОДСТВА ДЛЯ УКРЕПЛЕНИЯ ТРЕЩИНОВАТЫХ ПОВЕРХНОСТЕЙ

Аннотация. Рассмотрены результаты многолетних исследований ученых Satbayev Unibersitu по вопросам разработки модифицированных строительных материалов для укрепления ослабленных трещинами горных сооружений на основе отходов производства.

Промышленная переработка техногенного сырья (отходы обогащения и переработки, вскрышные и вмещающие породы), близкого по составу к природному и используемого в традиционных направлениях, практически не отличается от промышленной переработки природного минерального сырья. Создание эффективных технологий переработки техногенного сырья, позволяющих получать из него конкурентоспособную продукцию для различных областей промышленности, является актуальной задачей.

Если для предупреждения обрушений и оползней искусственное повышение прочности больших массивов пород практически пока неосуществимо, то предупреждение деформаций отдельных уступов и предотвращение осыпобразования с поверхности откосов путем искусственного укрепления находит сейчас применение на отечественных и зарубежных карьерах. На большинстве карьеров горные породы, слагающие нерабочие борта, неоднородны по своей структуре и физическим и механическим свойствам. Даже в однородных извержениях породах карьерного поля насчитывается множество зон тектонической нарушенности.

В зависимости от их размеров и пространственной ориентации они оказывают более или менее значительное влияние на устойчивость уступов и бортов. С помощью укрепления можно замедлять процессы выветривания и осыпания пород, предупреждать обрушения уступов и осыпание пород с поверхности откосов.

В статье проанализированы различные способы создания растворов для укрепления трещиноватых горных пород и строительных сооружений. Приведены результаты исследования хвостов обогащения Балхашского горно-металлургического комбината (БГМК) и получения растворов для укрепления трещиноватых горных пород и подземных горных сооружений.

Упрочнение массива горных пород на ослабленных участках достигается введением в трещины веществ, которые после отвердевания и схватывания с породой увеличивают ее характеристики сопротивления сдвигу. Введение упрочняющего вещества в массив осуществляется под давлением, а в качестве упрочняющегося материала нами рассматриваются цементные растворы, силикаты и полимерные смолы. Наибольшее распространение среди методов упрочнения получила цементация при проведении горных выработок (подземных сооружений) в трещиноватых породах. Область ее применения – массив, сложенный породами от сильнотрещиноватых скальных и полускальных до крупнозернистых песков и галечников при наличии в породах трещин, обеспечивающих доступ цементного раствора в трещину.

Значимость полученных результатов для строительной отрасли заключается в расширении и воспроизводстве сырьевой базы промышленности строительных материалов за счет использования отходов ГМК (хвостов обогащения) и разработки ресурсосберегающих технологий. Практическое значение работы состоит в том, что детально разработан модифицированный способ производства строительных материалов и изделий.

Ключевые слова: разработка месторождений, карьер, нарушенность, трещины, обрушения горного массива, укрепление, отходов горного производства, строительные материалы, модифицированные растворы.

Information about authors:

Aitkazinova Sh.A., PhD doctor, lecturer of “Mine surveying and geodesy”, Satbayev University, Almaty, Kazakhstan; shina.a@mail.ru; <https://orcid.org/0000-0002-0964-3008>

Bek A.A., PhD student, assistant of “ Building materials” department, Satbayev University, Almaty, Kazakhstan; aiman.lady.bek@gmail.com; <https://orcid.org/0000-0003-1671-297X>

Derbisov K.T., Tutor of “Mine Surveying and Geodesy” Department, Satbayev University, Almaty, Kazakhstan; derbisov.k@mail.ru; <https://orcid.org/0000-0001-7584-1304>

Donenbayeva N.S., PhD student, Satbayev University, Almaty, Kazakhstan; nsdonchik@mail.ru

Nurpeissova M.B., professor of “ Mine surveying and geodesy” department, doctor of technical sciences, professor, Satbayev University, Almaty, Kazakhstan; marzhan-nurpeissova@rambler.ru; <https://orcid.org/0000-0003-0412-8469>

Levin E., Michigan Technological University, Michigan, USA; elevin@mtu.edu; <https://orcid.org/0000-0001-6774-9276>

REFERENCES

[1] Research report on Grant Financing “Risk reduction of technological disasters by developing innovative management methods”, No. 0115RK02448. Almaty: KazNITU, 2016. 128 p.

[2] Nurpeissova M., Kyrgyzbaeva G., Aitkazinova Sh, The methodology of monitoring the earth surface displacements during the development of the subsoil // News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. 2015. N 4. P. 95-100.

[3] Nurpeisova M., Donenbaeva N., Bek A.A. Devepolment of geodetic methods of monitoring of open-pit sides stability (Tomcon Roiters). Biosc.Biotech.Res.Comm Special Issue Vol 12, N (4). Sep 2019. P. 67-78.

[4] Arsentiev A.I., Arsentiev V.A. (2002) Puti razvitiya tekhnologij v gornodobyvayushchej promyshlennosti SSHA [Ways of development of technologies in the mining industry of the USA] // Gornyj zhurnal. 2012, N 6. P. 16-23.

[5] Galiev S.Zh. Perspektivy razvitiya nauchno-tekhnicheskogo potentsiala gornodobyvayushchego sektora v svete novoj industrial'no-innovacionnoj politiki Kazahstana// trudy IGD imeni D.A. Kunaeva «Nauchno-tekhnicheskoe obespechenie gornogo proizvodstva», 2003.

[6] Iofis M.A. Prirodai mekhanizm obrazovaniya sosredotochennyh deformacij v mul'de sdvizheniya // Gornyj informacionno-analiticheskij byulleten'. 2005, N 7. P. 82-86.

[7] Altaeva Z.N., Kasymkanova H.M., Nurpeisova M., Bek A.Zh. Sostav dlya zakrepleniya pylyashchihsya poverhnostej hvostohranilishch i drugih ob'ektov // Predpatent №19861 vydan Komitetom po pravam intellektual'noj sobstvennosti Ministerstvo yusticii RK, 2008.

[8] Nurpeisova M.B., Kurmanbaev O.S. Laws of development of geomechanical processes in the Maykayin field // Izvestiya NAS Republic of Kazakhstan. A series of geology and technical sciences. N 6, 2016. P. 109-115.

[9] Shomanova Zh., Safarov R.Z. and others. Stugy of composition of waste from metallurgy production aimed 3n use them as active phases of catalysts for hydrocarbon raw materials refining // News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. N 6, 2017. P. 195-200.

[10] Bazhirov N.S., Dauletiyarov B.N. and others. Research of waste of aluminum production as the raw components in technology of composite cementing materials // News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. N 1, 2018. P. 93-99.

[11] Nurtai Z., Naukenova F. and others. Optimal structure establishment of compositional material for manufacturing strengthened to bending mud-flow protective constructions // News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. N 3, 2018. P. 103-113.

[12] Kasymkanova H.M., Nurpeisova M.B., Bek A.Sh. Rastvor dlya ukrepleniya treshchinovytyh porod // Predpatent NPV RK №14476, 2004.

[13] Asanakunov M.A., Abdyldaev E.E., Mashanov A.A., Abdyldaev E.K. (2011) Uchet treshchinovatosti massiva i kontaktnye usloviya [Accounting for fractured array and contact conditions] / Materialy V11 mezinarodni vedecko-prakticka conference «efektivni nastrole modernich ved – 2011», Dil 20 Technicke vedy, Praha. P. 82-87.

[14] Pevzner M.E. Deformaciya gornyh porod na kar'erah M.: Nedra, 1998. 235 p.

[15] Avtorskoye svidetel'stvo №178271 USSR // Altayev Sh.A., Zhalgasov N.Zh., Kadirsyzov N. Published 15.01.93.

[16] Saraskin A.V., Zamoskovtseva G.D., Mannanov R.Sh. Application and injection methods for hardening unstable rocks // Development of powerful ore deposits. Magnitogorsk: MSTU, 1999. 186 p.

[17] Kasymkanova Kh., Dzhangulova G. and others. Rapid assessment of the geomechanical state of a mountain massif and the development of methods for its hardening and strengthening for the ecological safety of mining mineral deposits in complex mining and geological conditions // News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. N 6, 2018. P. 37-46.

[18] Nurpeisova M., Bekbassarov Zh. and others. Complex evaluation of geodynamic safety in the development of hydrocarbon reserves deposits// News of the National Academy of Sciences of Kazakhstan. A series of geology and technical sciences. N 1, 2020. P. 90-99.

[19] Utility Model Patent. No. 1573 of the Republic of Kazakhstan. Composition for strengthening fractured rocks / Nurpeisova M.B., Kyrgizbaeva G.M., Bek A.A. Publ. On January 2nd, 2016

[20] Nurpeisova M.B., Kyrgizbaeva G.M., Bek A.A. Innovational methods of geomonitoring - the most effective way of providing industrial safety in mines //16-th International symposium on Environmental Issues and Waste Managment in Energy and Mineral Production (Tomcon Roiters). Istanbul, 2016. P. 52-54.

**Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www.nauka-nanrk.kz

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://www.geolog-technical.kz/index.php/en/>

Редакторы *М. С. Ахметова, Д. С. Аленов, А. Ахметова*
Верстка *Д. А. Абдрахимовой*

Подписано в печать 14.10.2020.
Формат 70x881/8. Бумага офсетная. Печать – ризограф.
14 п.л. Тираж 300. Заказ 5.